


ARCHITECTURAL LINEAR

EDGE Series

XICO®

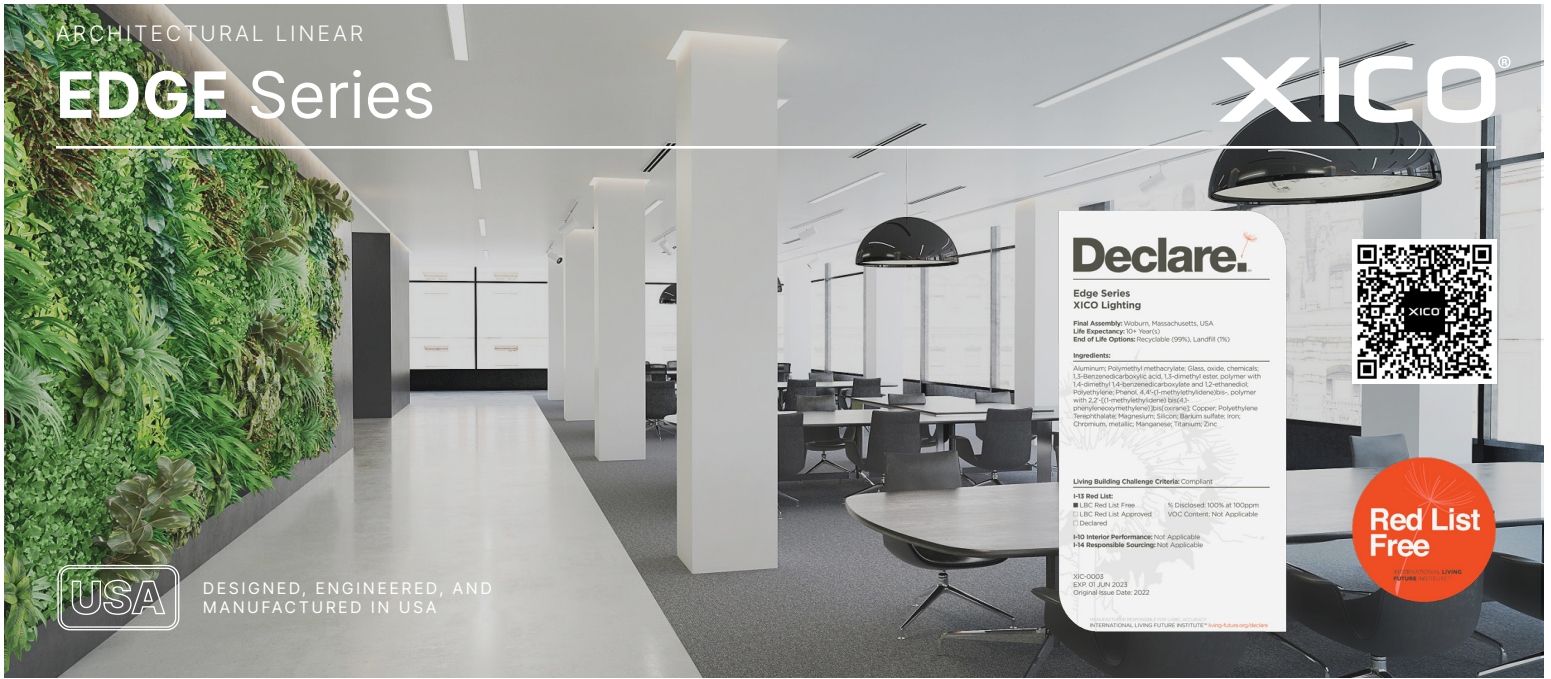

Declare.

Edge Series
XICO Lighting

Final Assembly: Woburn, Massachusetts, USA
Life Expectancy: 10+ Year(s)
End of Life Option: Recyclable (99%), Landfill (0%)

Ingredients:
Aluminum; Poly(methyl methacrylate); Glass; oxide, chemicals; 1,3-dioxane; acetic acid; 1,3-dimethyl ester; polymer with 1,4-dimethyl-1,4-bis(methylcarbonate) and 1,2-ethanedithiol; polyethylene glycol; 4,4'-di(methylvinylidene)-polymer with 2,2'-di(methylcarbonate) bis(4-phenylene-methylene) bis(amine); Copper; Polyethylene Terephthalate; Magnesium; Silicon; Barium sulfate; Iron; Chromium; metallic; Manganese; Titanium; Zinc

Living Building Challenge Criteria: Compliant

1-13 Red List

- LBC Red List Free: 100% Disclosed 100% at 100ppm
- LBC Red List Approved: VOC Content: Not Applicable
- Declared

1-10 Interior Performance: Not Applicable
1-13 Responsible Sourcing: Not Applicable

300-0003
EXP. 01 JUN 2023
Original Issue Date: 2022

INTERNATIONAL LIVING FUTURE INSTITUTE® enphibuildinglab.com



USA DESIGNED, ENGINEERED, AND MANUFACTURED IN USA

State-of-the-art linears with patented edge-lit optical systems

EDGE represents the state-of-the-art in lighting systems using light guides. Razor slim pendants and surface mounts. Zero plenum slots and recessed. All equipped with everything SmartBeam® has to offer.


EDGE is the culmination of years of advancements in edge-lit optics and LED technology. EDGE brings SmartBeam® control to ultraslim form factors. Unique profiles in recesses, surface or pendant form. Highest available optical system efficiencies (>135 LPW), integral or remote driver to remove visual bulk, and a wide range of mounting options.

SIZES - 2.75" & 4" with standard lengths of 2', 4', 6', 8' and specifiable lengths in 6" increments.


MOUNTING - Pendant, Surface, Slot, or ADA-compliant Wall Mount.

OUTPUT - Direct and/or Indirect, Choice of CRI, BIOS, RGB, RGBW, Tunable White, White.


DRIVER - Dimmable 0-10V to 1%/0.1%; DALI & DMX.




EDGEHybrid 6
Rectangular flanged profile: 6" (101mm) x 0.98" (25mm)



EDGERazor
Trapezoid profile: 0.50" (12.7mm) x 4.0" (101mm)



EDGESolo
Rectangular profile: Multiple Sizes x 0.98" (25mm)




EDGESolo Mud-In
Rectangular profile: 2.75" (70mm) x 0.98" (25mm)




EDGESlot 4 Tbar
Rectangular flanged profile: 4" (101mm) x 0.98" (25mm)




EDGESlot 4 Drywall
Rectangular flanged profile: 4" (101mm) x 0.98" (25mm)



End Caps / Joiners



TBar / Grid Integration



Architectural Ceilings



Sensors and Optics

Specifications

	EDGESolo 2.75"	EDGE Razor	EDGESlot 4 Tbar	EDGESlot 4	EDGEHybrid 6	EDGEHybrid 6 MCO
Dimension	2.75"	4.0"	4.0"	4.0"	6.0"	6.0"
Surface Mount	•	•				
Recessed				•	•	•
Mud-In	•					
Perimeter			•	•		
Direct or Indirect	•	•	•	•	•	•
Direct and Indirect	•	•				
Custom/Programmable Lumen Outputs	•	•	•	•	•	•
BIOS® Illuminated	•		•	•	•	•
Continuous Optics	•	•	•	•	•	•
Zero Plenum	•		•	•	•	•
Low-Glare Options	Low-glare film	Low-glare film	Low-glare film	Low-glare film	Low-glare film / Baffles	Low-glare film / MCO
Regressed Lens Option			•	•	•	•

SmartBeam® - Beam Distributions

Wide 100°-120°	•	•	•	•	•	•
Medium 40°-90°	•	•	•	•	•	•
Batwing 60°	•	•	•	•	•	•
Asymmetric	•	•	•	•	•	•
Cosine® Indirect 120°-150°	•	•				
Ceiling Wash Indirect	•	•				



Declare.

