


EDGESolo Woodworks

Control & Performance with Light Guides



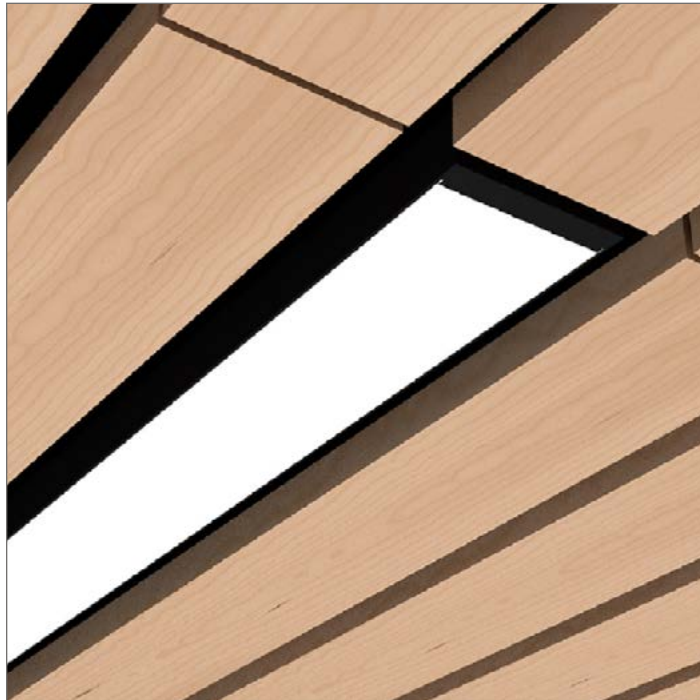


Remote Driver



EDGESolo

EDGESolo Series

Warnings


-  Risk of fire and electrical shock
-  Turn off power at breaker
-  Installation requires knowledge of electrical systems and should be installed by a qualified electrician. If not qualified, **DO NOT ATTEMPT INSTALLATION.**

Care Instructions

-  Wipe with a soft cloth only
-  Always avoid using harsh chemicals and/or cleaners

STEP 1 — Fixture Location (skip to Step 5 for Univerasal Mount and Turf)

The EDGESolo fastens to TBar at a minimum of (2) locations. Secondary support of the TBar may be required (provided by other). Fasten the clip to the housing with the provided screw(s).

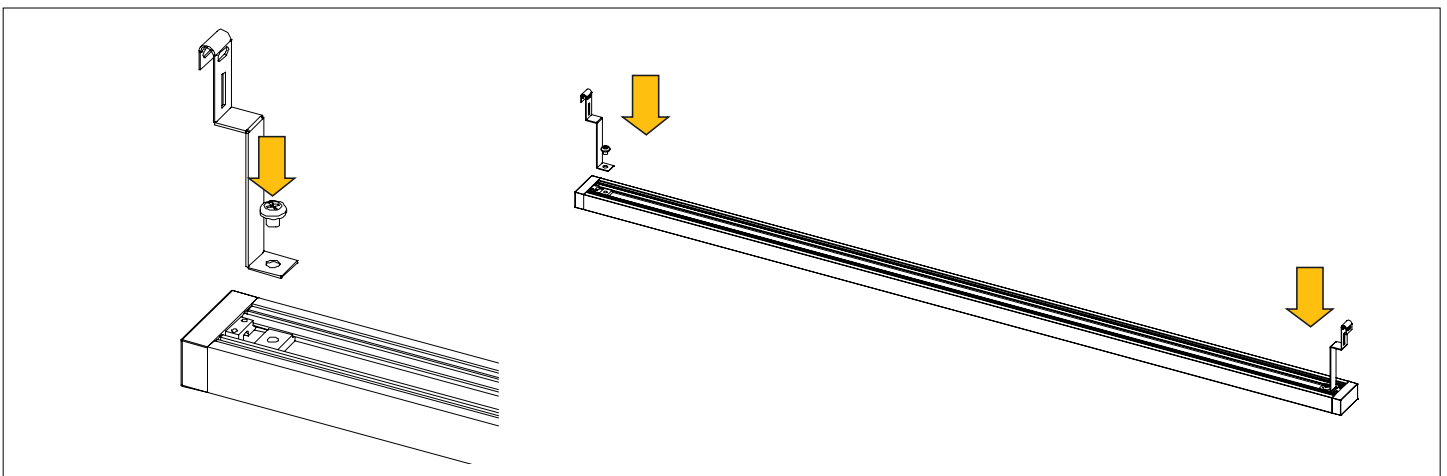


Designed & Built in
BOSTON

Declare




STEP 2 — Install Fixture

Once the Tbar bracket is engaged, raise the fixture up to the grid and slide left to right and set at the desired location of the clip to mount to the TBar and tighten to the fixture body.

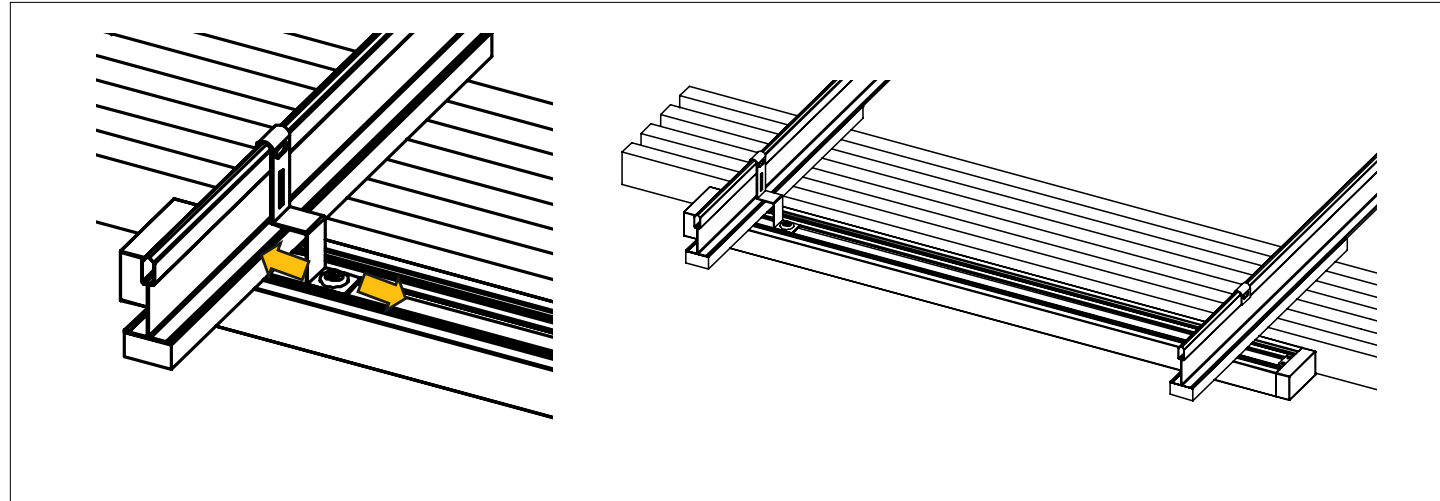


STEP 3 — TBar Fins

Hang the Bracket on the TBar and secure to with a self tapping screw, if required.

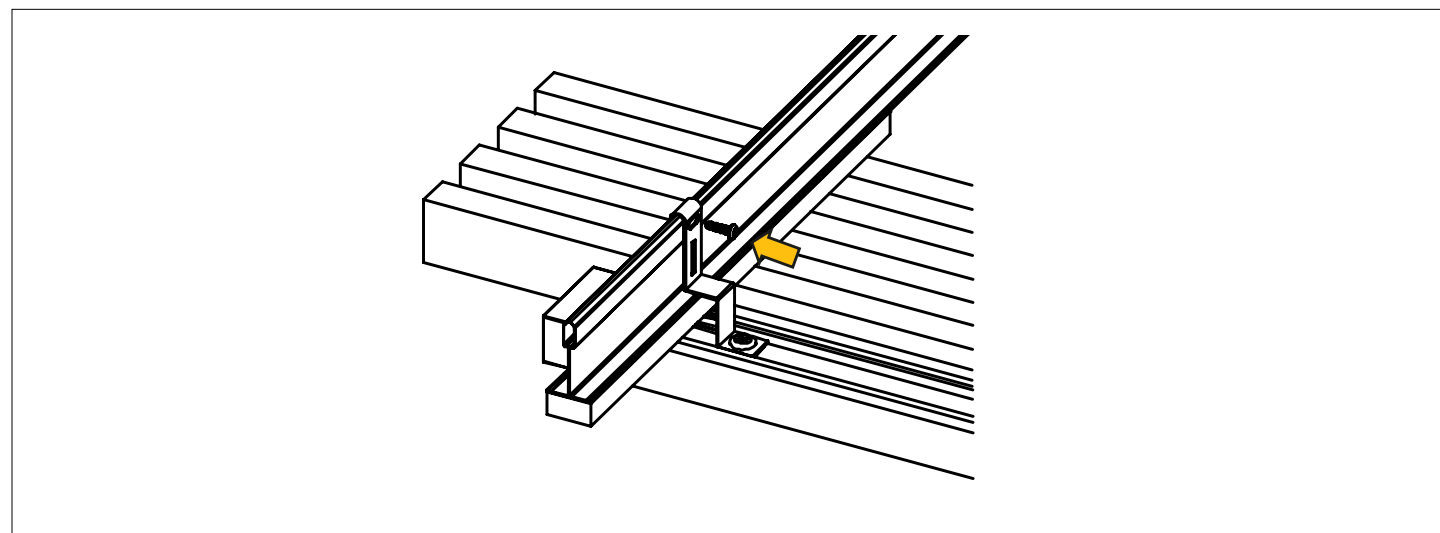

STEP 4 — Install Driver Box


An enclosed Driver Box is provided. Connect the EDGESolo fixture to the Driver Box at the appropriate location for your space. If not ordered, you will need to provide a DC Feed from the fixture to the driver box. Refer to the wiring diagram. If you have multiple fixtures or a group installation, your technical drawing will provide additional wiring information.

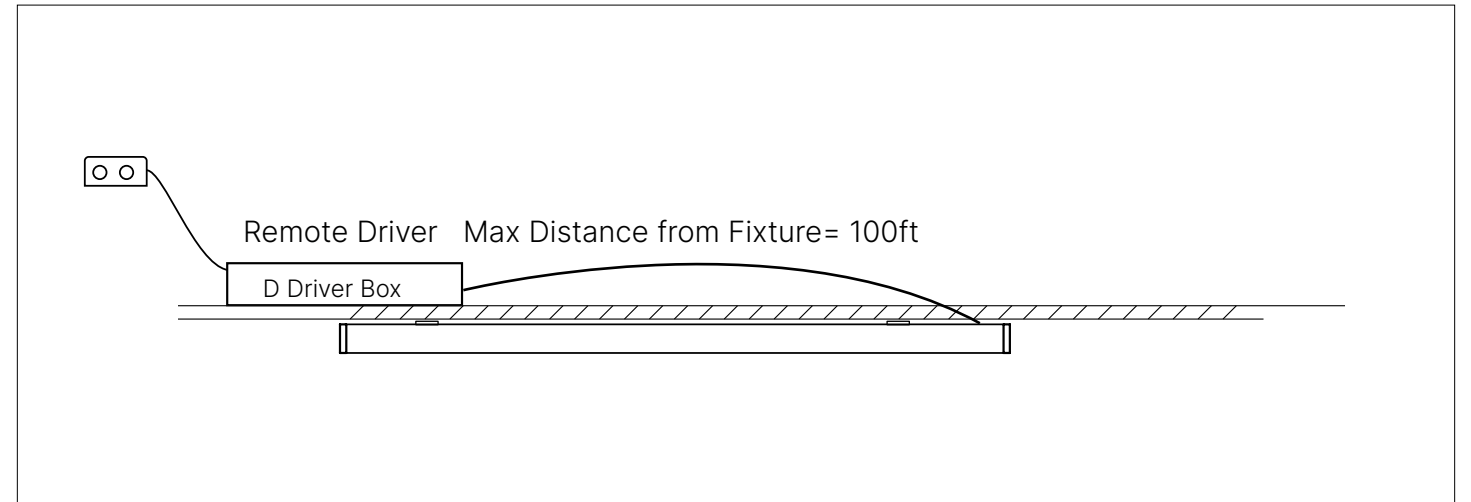

Additional Info


Clips are provided based on your order. A unique clip is used based on the wood slat height being used to allow for the fixture to sit flush to the face of the wood slat.

Driver Boxes can be remotely placed up to 100ft from the fixture.

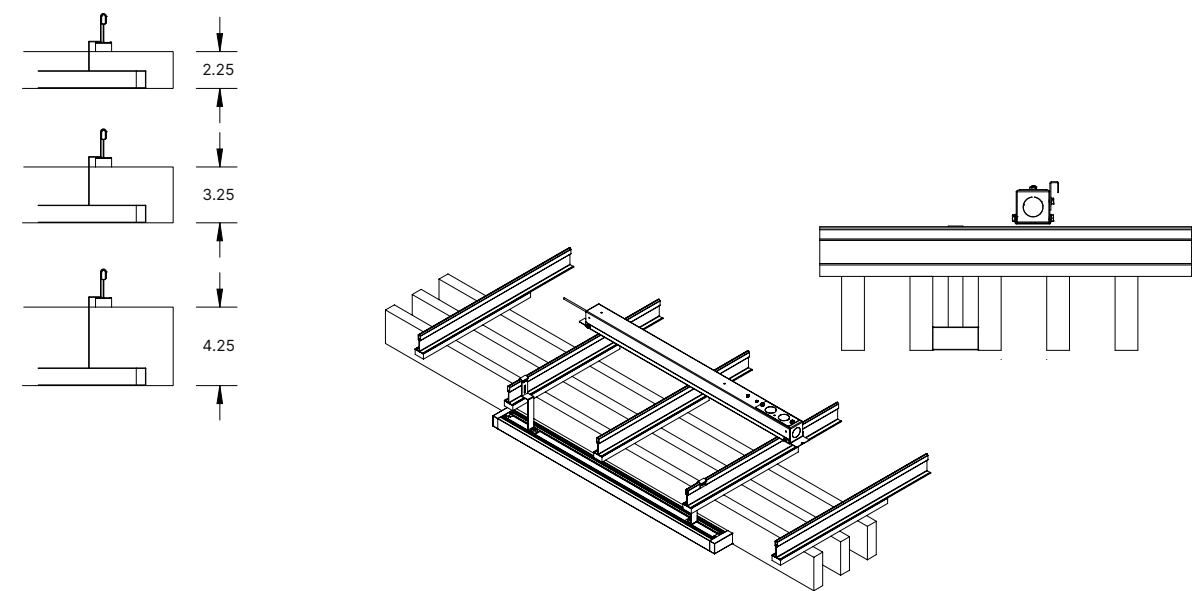


STEP 5 — Universal Mounting and TURF system

The EDGESolo for Turf fastens to TBar at a minimum of (2) locations. Thread the post into the fixture connector. Secondary support of the TBar is require (provided by other).

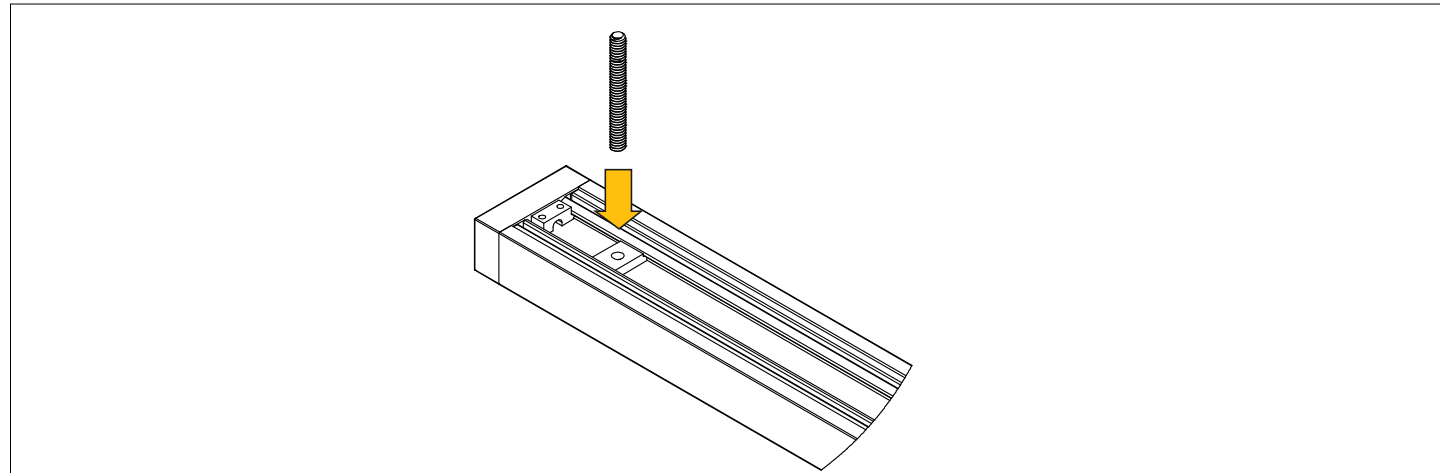


STEP 6 — Adjustment

Once the Tbar bracket is engaged, slide left to right and set at the desired location to mount to the TBar.

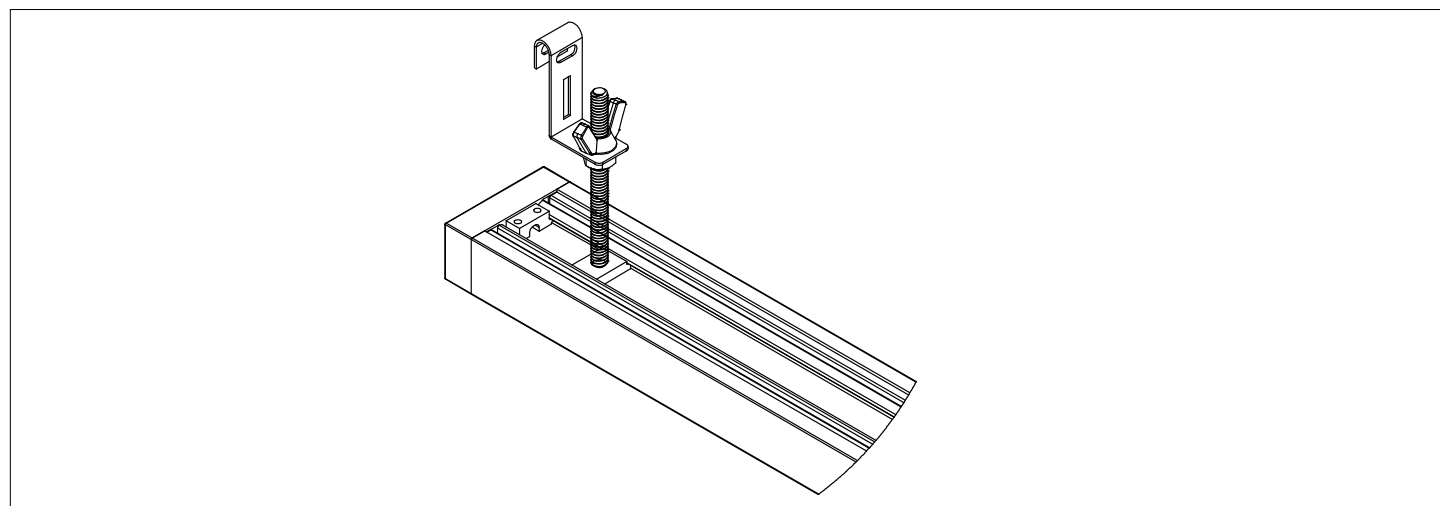

STEP 7 — Wire Feed

Drill a clearance hole (17/64 min.) to allow for the threaded rod to pass through the Turf Deck. A second clearance hole will allow the power feed to pass through the Turf Deck. Hang the Bracket on the TBar and secure to with a self tapping screw. Tighten the nut until the fixture is secure to the ceiling structure.

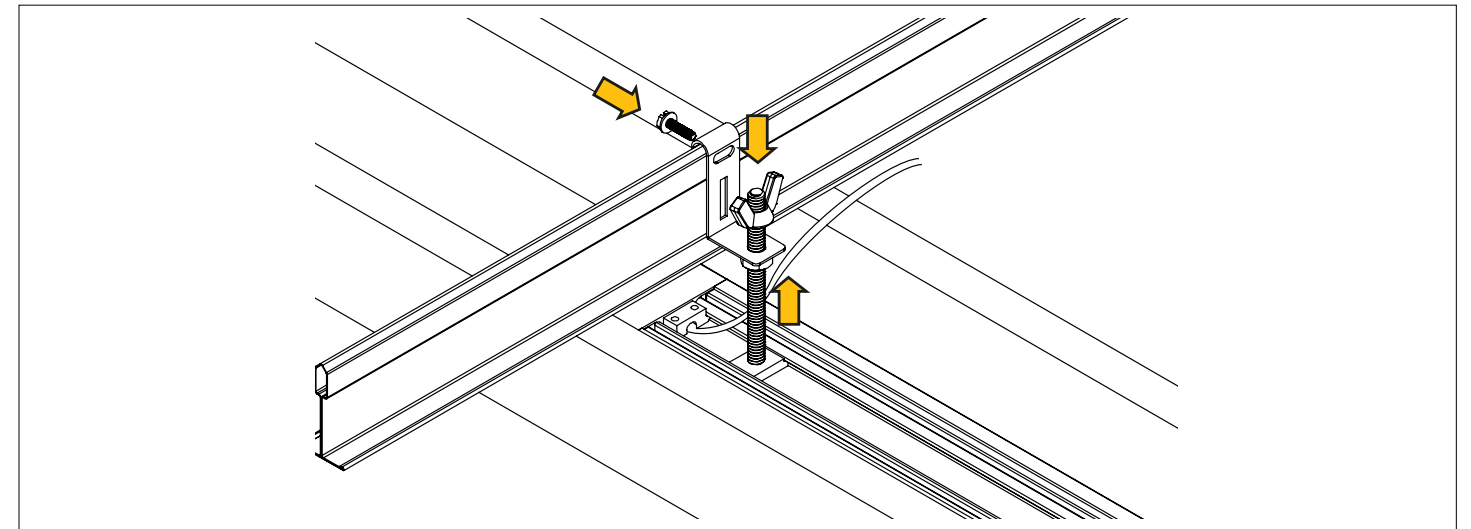

Voltage Drop

24 VDC and Wire Length Chart (Driver to Fixture)

XICO LED Fixture with Remote Drivers

When installing a XICO fixture with a remote driver and the distance is a long way from the fixture, it is important to properly specify the correct wire gauge (AWG/ or thickness of wire) for the distance of wire required. The maximum remote mounting distance is a function of the total voltage-drop across the output of the LED Driver.

How to Use the Chart

- Step 1:** Calculate the total wattage of the LED lighting system (round up to the nearest 10 W).
- Step 2:** Find the wattage in the top row and follow the column down to maximum length (round up) of wiring between the LEDs and the power supply.
- Step 3:** Look to the left column for the wire gauge size required to prevent voltage drop over 3%.

| Maximum Cable Length from Remote Driver to Fixture — 24 VDC Driver | | | | | | | | | | |
|--|---------------------------|--------|--------|--------|--------|--------|--------|-------|-------|-------|
| Wire Gauge | Total Fixture Wattage (W) | | | | | | | | | |
| | 10 W | 20 W | 30 W | 40 W | 50 W | 60 W | 70 W | 80 W | 90 W | 100 W |
| 18 AWG | 134 ft | 68 ft | 45 ft | 33 ft | 27 ft | 22 ft | 19 ft | 17 ft | 15 ft | 14 ft |
| 16 AWG | 215 ft | 109 ft | 72 ft | 54 ft | 43 ft | 36 ft | 31 ft | 27 ft | 24 ft | 22 ft |
| 14 AWG | 345 ft | 174 ft | 115 ft | 86 ft | 69 ft | 57 ft | 49 ft | 43 ft | 39 ft | 36 ft |
| 12 AWG | 539 ft | 272 ft | 181 ft | 135 ft | 108 ft | 90 ft | 77 ft | 68 ft | 62 ft | 56 ft |
| 10 AWG | 784 ft | 397 ft | 263 ft | 197 ft | 158 ft | 131 ft | 112 ft | 98 ft | 95 ft | 82 ft |

Remote Driver to Fixture Example

Calculate total load

An 8 ft fixture using 4 W/ft requires a total of 32 W. Round up to the nearest load of 40 W.

Find distance from driver to Load

Let's assume the distance is 40 ft from the driver to the fixture. Round up to the nearest distance of 54 ft.

Choose wire gauge

It's recommended to install 16 AWG wire between the driver and fixture to eliminate noticeable voltage drop.