

## MICROCove AC Indirect 1.4" Low-Profile Linear LED Cove Mount



Integral Driver

### Features & Benefits

Exceptional Performance  
Up to 1,250 lm/ft, 150 lm/W efficacy

Wide Range of LED Selections  
Static, Tunable White, and Dim-to-Warm. 80/90/95+ CRI, 2200K to 5000K CCT.

AC Power Input with Dimming & Control Options  
Direct AC input (110V-277V) wide range of control options including 0-10V, DALI, DMX, and TRIAC dimming

Patented Innovations  
Fusion Optix® Inside with unique SmartBeam® capabilities

Proprietary Optical Components  
Provides excellent light distribution and high-transmission

Committed to Made-in-USA & Sustainability  
Designed & built in Boston MA, Declare Listed and Red Free List materials

Compliance  
UL Listed, Dry and Damp Locations

5-Year Warranty  
Standard 5-year warranty, 50,000 hours



Designed & Built in  
**BOSTON**



## FIXTURE ORDERING

 Project Name 

 Fixture Type 

### 1) FIXTURE DESIGN

PRODUCT	FIXTURE LENGTH	COLOR & FINISH	DAISY CHAIN	MOUNTING TYPE
<b>MCV-ACI</b>				
1.4" Low-Profile Linear LED Cove Mount with AC Power for Indirect Lighting	<b>1FT</b> 12in Nominal <b>2FT</b> 24in Nominal <b>3FT</b> 36in Nominal <b>4FT</b> 48in Nominal X_ Specify X, Y"	<b>MWH</b> Matte White (RAL9003)	<b>DN</b> No: Daisy Chain (Single Input) <b>DY</b> Yes: Daisy Chain	<b>FM</b> Fixed Mount <b>AM</b> Adjustable Angle Mount

### 2) LED LIGHT ENGINE

CRI	CCT	BEAM PATTERN	INDIRECT OUTPUT
<b>S80</b> Std. 80 CRI	<b>22</b> 2200K	<b>LAM</b> Lambertian	<b>25</b> 250 lm/ft
<b>S90</b> Std. 90 CRI	<b>27</b> 2700K	<b>BW120</b> Batwing 120°	<b>35</b> 350 lm/ft
<b>HE80</b> High-Eff. 80 CRI	<b>30</b> 3000K	<b>FT150</b> FlatTop 150°	<b>50</b> 500 lm/ft
<b>HE90</b> High-Eff. 90 CRI	<b>35</b> 3500K	<b>A6040</b> Asymmetric 60° at 40° Tilt	<b>75</b> 750 lm/ft
<b>HD95</b> High-Def. 95 CRI	<b>40</b> 4000K	<b>A4560</b> Asymmetric 45° at 60° Tilt	<b>100</b> 1,000 lm/ft
<b>SUN</b> Full SunLike	<b>50</b> 5000K	<b>X_</b> Specify Beam	<b>125</b> 1,250 LM/FT
<b>SBIOS</b> Static BIOS	<b>3022DW</b> 3000K to 2200K Dim-to-Warm		<b>X_</b> Specify lm/ft
<b>DBIOS</b> Dynamic BIOS	<b>3527DW</b> 3500K to 2700K Dim-to-Warm		
<b>TBIOS</b> Tunable White BIOS	<b>X_</b> Specify CCT		

### 3) FIXTURE POWER & CONTROLS

LINE VOLTAGE (DC)	INTEGRAL DRIVER (POWER)	EMERGENCY BACKUP	CONTROL SYSTEM <sup>1</sup>
<b>120V</b> 120V	<b>FDND</b> Factory Non-Dimming	<b>NN</b> Not Needed	<b>NN</b> Not Needed
<b>277V</b> 277V	<b>FD01</b> Factory 0-10V 1% Dim	<b>EMC</b> Emergency Circuit	<b>LUT</b> Lutron
<b>347V</b> 347V	<b>FD10</b> Factory 0-10V 10% Dim	<b>EMB</b> Emergency Battery (10 W — Onboard)	<b>COO</b> Cooper
<b>UNV</b> UNV	<b>FDDA</b> Factory DALI 0.1% Dim	<b>X_</b> Specify Backup	<b>CAS</b> Casambi
	<b>FDDX</b> Factory DMX Dim		<b>X_</b> Specify Control System
	<b>FDTR</b> Factory TRIAC Dim		
	<b>LD01</b> Lutron Hi-Lume 1% Dim		
	<b>LD05</b> Lutron 5-Series 5% Dim		
	<b>ED00</b> eldoLED 0-10V 0.1% Dim		
	<b>ED01</b> eldoLED 0-10V 1% Dim		
	<b>EDDA</b> eldoLED DALI 0.1% Dim		
	<b>X_</b> Specify Driver		

### 4) FIXTURE MOUNTING & ACCESSORIES

#### POWER EXTENSION CORD

<b>EC6WH</b>	6" White Extension Cable
<b>EC12WH</b>	12" White Extension Cable
<b>EC24WH</b>	24" White Extension Cable
<b>EC48WH</b>	48" White Extension Cable

#### NOTES


Footnotes: <sup>1</sup> The control system and driver must be compatible.

## FIXTURE DESIGN

### Dimensions




To download BIM (Revit) Files, please click or scan the QR Code.




**Fixed Mount**

optics decide beam distribution

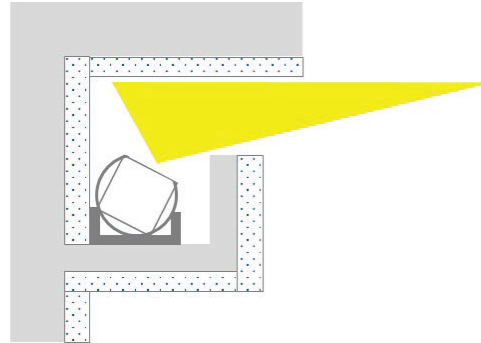

**Adjustable Angle Mount**

beam distribution by additional tilting of fixture

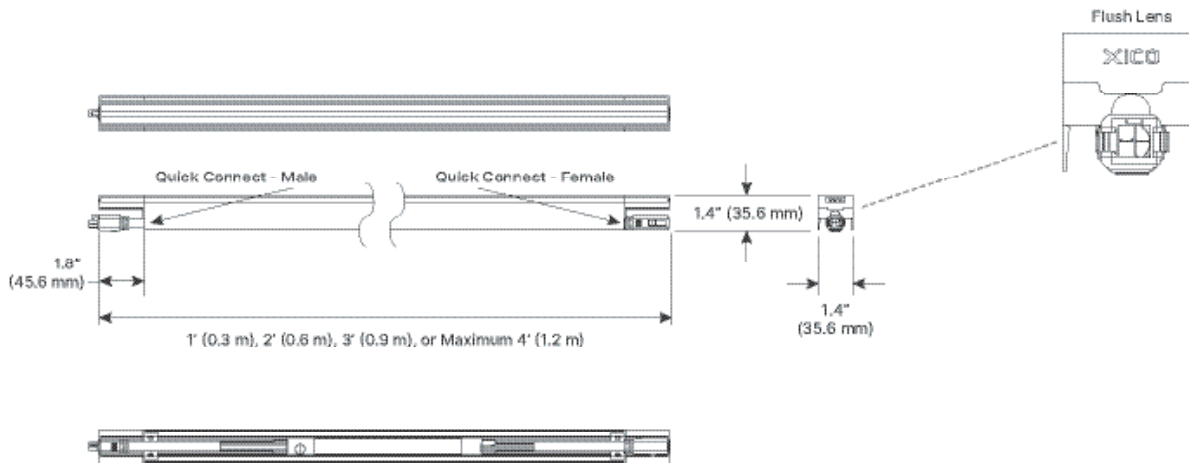

### Length

Length Options 1', 2', 3', 4' nominal, or custom within 6"

### Finish

Housing Color (Matte Finish)



White (RAL9003)

Housing Material 6063-T5 extruded, recycled aluminum

Mounting Brackets Sheet metal


### Voltage

Fixture Voltage (AC) 120-277 VAC and 347 VAC, 50/60 Hz

## INDIRECT PHOTOMETRICS


Static White Light

ILAM: Lambertian




Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	4,000
lm/ft	1,000
Watts	26.7
W/ft	6.7
LPW	150

IBW120: Batwing 120°




Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	4,000
lm/ft	1,000
Watts	26
W/ft	6.4
LPW	156

IFT150: FlatTop 150°




Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	4,000
lm/ft	1,000
Watts	28
W/ft	7.0
LPW	143

IA6040: Asymmetric 60° at 40° Tilt



Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	4,000
lm/ft	1,000
Watts	28
W/ft	7.0
LPW	143


IA4560: Asymmetric 45° at 60° Tilt




Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	4,000
lm/ft	1,000
Watts	28
W/ft	7.0
LPW	143

## LED SELECTION GUIDE


S80: Standard 80+ CRI




S90: Standard 90+ CRI




HE80: High-Efficiency 80+ CRI




HE90: High-Efficiency 90+ CRI




HD95: High-Definition 95+ CRI

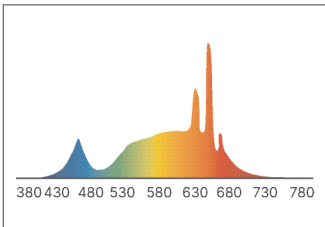


SUN: Full Spectrum "SunLike"

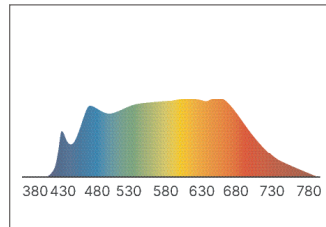

HCD: Human Centric Day

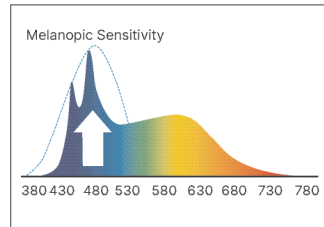

HCN: Human Centric Night

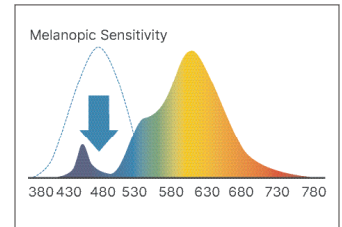

### Static White Light (LED Light Engine Only)

CODE	DESCRIPTION	TYPICAL LED DATA							
		CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	M/P Ratio	LPW
S80	Standard 80 CRI	3500K	82.5	7.8	84	96.7	82.5	0.51	190
S90	Standard 90 CRI	3500K	91	54.3	89.3	98.9	89.2	0.55	175
HE80	High Efficiency 80 CRI	3500K	82.1	5.9	83	94.2	81.2	0.52	210
HE90	High Efficiency 90 CRI	3500K	92.2	90	90.7	103.8	92.1	0.56	190
HD95	High Definition 95 CRI	3500K	97.1	95	-	-	-	0.70	163
SUN	Full Spectrum SunLike®	3500K	95	85	-	-	-	-	130
HCD	Human Centric Day	4000K	83	95	-	-	-	0.92	155
HCN	Human Centric Night	2700K	80	-	-	-	-	0.44	134

### LPW Efficacy Conversion Chart

CODE	CCT SELECTED							
	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
S80	-	0.91	0.96	1.00	1.04	1.11	1.11	1.11
S90	-	0.91	0.96	1.00	1.04	1.11	1.11	1.11
HE80	-	0.96	0.99	1.00	1.03	1.04	1.03	1.03
HE90	-	0.91	0.96	1.00	1.04	1.11	N/A	N/A
HD95	-	0.91	0.96	1.00	1.04	1.11	1.03	1.04
SUN95	-	0.90	0.92	1.00	1.01	1.07	1.04	1.05
HCD	-	N/A	0.96	1.00	1.04	1.04	1.04	1.04
HCN	-	0.87	0.96	1.00	1.04	N/A	N/A	N/A

## BIOS TECHNOLOGY

### Choosing Your BIOS Solution


BIOS is offered in four Circadian LED Solutions with BIOS SkyBlue Technology — Biological Static, Biological Dynamic, Biological Tunable, and Biological Dim-to-Warm. BIOS SkyBlue™ Technology includes a blue peak at 490nm that provides an effective daytime circadian signal using standard architectural color temperatures.




To learn more about BIOS Technology, please click or scan the QR Code.




BIOS Static




BIOS Dynamic



BIOS Tunable



BIOS Dim-to-Warm



#### Daytime

No color change when dimmed

Spaces that operate during daytime hours — 7am and 7pm

#### Daytime & Evening

500K shift when dimmed

Spaces that operate overnight — after 7pm and before 7am

#### Daytime & Evening

Dims to 2700K

Spaces that operate with overnight shifts — after 7pm and before 7am

#### Daytime & Evening

Dims from cool to warm

Spaces where people sleep — after 7pm and before 7am

### Circadian and Human Centric Light

CODE	DESCRIPTION	BIO-DIMMING MODULE TECHNOLOGY GUIDE					
		Driver	Driver Voltage	CCT	Requires BIO-Dimming Module	Lighting Control	BIOS SkyBlue (490nm)
SBIOS	BIOS Static	DIM1	0-10V Dimming to 1% Dim-to-Dark	No CCT Change	No	Intensity Dimming Control Only	Always Present
DBIOS	BIOS Dynamic	BIODIM1	0-10V Intensity Dimming to 1% Dim-to-Dark	500K Shift	Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming
DBIOS-2	BIOS Dynamic (Two Channel)				No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"
TBIOS	BIOS Tunable	ATW / DTW	0-10V Control of Intensity & CCT on Separate 2 Channels / DALI Control of Intensity & CCT on Separate 2 Channels	Dims to 2700K	Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming
TBIOS-2	BIOS Tunable (Two Channel)				No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"
DWBIOS	BIOS Dim-to-Warm	-	-	Dims to 2200K	Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming
DWBIOS-2	BIOS Dim-to-Warm (Two Channel)				No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"

## SMARTBEAM® TECHNOLOGY

The Ultimate Control of Lighting Distributions

SmartBeam makes it easy to specify the exact light required for any architectural space. Available in every XICO product; it is now possible to create truly tailored and engaging lighting that transform spaces, improves visual comfort, and saves energy.

To learn more about our SmartBeam Technology, please click or scan the QR Code.



## FIXTURE POWER & CONTROLS

### Voltage

LED Driver Factory Selected, 36–39V Constant Current

### Emergency Backup

Backup Types Emergency Circuit, Emergency Battery (Onboard), and other emergency backups are available

Wiring Typically the Emergency Backup is wired to 48" sections

Power 10 W

Illumination Time 90 minutes

### Partners



### Control Systems


Integral Driver

Other Factory Non-Dimming, Factory 0–10V 1% Dim, Factory 0–10V 10% Dim, Factory DALI 0.1% Dim, Factory DMX Dim, Factory TRIAC Dim, eldoLED 0–10V 0.1% Dim, eldoLED 0–10V 1% Dim, eldoLED DALI 0.1% Dim, and other drivers are available, consult factory (not all integral)

Lutron Hi-Lume 1% Dimming and 5-Series 5% Dimming

Cooper Compatible driver

Casambi (wireless) Compatible driver



Drivers are integral to the fixture and are included. They provide 0–10V, DALI, DMX, and TRIAC dimming. Also compatible with Cooper and other common building control systems, including PoE and wireless.

## FIXTURE MOUNTING & ACCESSORIES

### Mounting Type


**Cove Mount** Installs into a cove. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements.

### Power Extension Cord

**Sizes and Color** 6", 12", 24", and 48", White Extension Cords

### Connector (AC)


**Connector Options** Easy Plug-and-Play Factory Installed Connectors

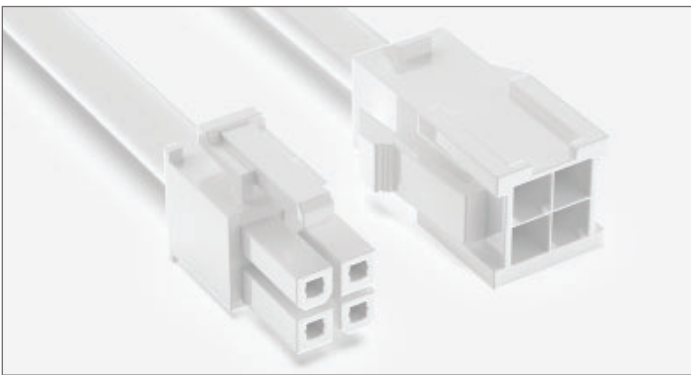


Factory Connectors

### Standard Lengths & Continuous Runs

Maximum length of one fixture is 4'. Longer runs can be produced by connecting fixtures or daisy chain. Customer approval of shop drawings is required prior to build of any non-standard length order.

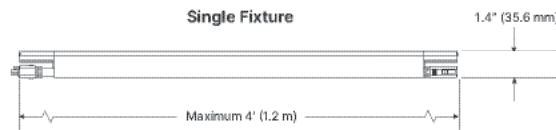


### Standard Continuous Run

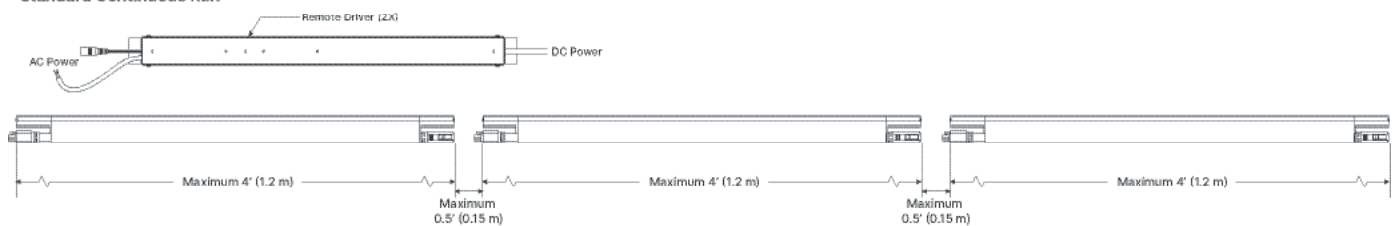



STANDARDS & CERTIFICATIONS

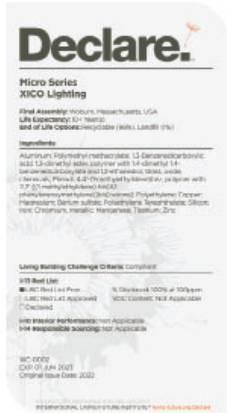

**Declare Listed**  
 Declare labels provide a quick and reliable way to make choices about the environmental footprint and safety of the product. Declare is internationally recognized and the labels can be found on the product, product packaging, or company website. Visit [xicoled.com](http://xicoled.com) for Declare Listed details.



**Red List Free**  
 An industry standard certification for LED lighting products based on the International Living Future Institute (ILFI). These products only use materials based on the “Red List of Toxic Chemicals” (a list of chemicals and materials known to be hazardous to people and/or the Earth) that are safe, healthy, and environmentally sustainable.

Certifications

**Compliance** BAA & TAA compliant in-house manufacturing in Boston, MA with North American supply chain

**Certifications**    

**Sustainability** Declare Listed and Red List Free

**Packaging** Low carbon, environmentally conscious packaging and shipping methods

Environmental Suitability

**IP Rating** Suitable for Dry and Damp Locations, indoor use only

**Recyclable** SmartOptics and all powder coated and anodized parts are fully recyclable at end of life

Reliability

**Manufacturing** All XICO products and associated optics and LED engines are assembled at our factory in Woburn, MA

**Quality Assurance** Each product is engineered reliability and quality assurance tested

Warranty & Terms

5-YR Warranty

Business Terms



For details on our warranty and business terms, please click or scan the QR Code.