
# **EDGE**Razor 4



# 4" Knife Edge Linear

Direct+Indirect



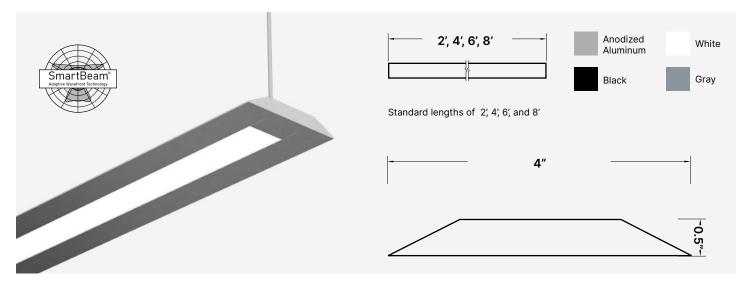

## Design

EDGERazor is an innovative ultra-slim 4" low profile pendant direct/indirect linear LED fixture with remote driver and choices of lumen outputs, color temperature, & color quality.

#### **Features**

- High efficacy combined 135lm/W
- Trapezoidal profile: 4" x 0.5"
- SpekLED® & SmartOptics® inside
- 80+/90+ CRI, 2700K-4000K specifications
- Dimming down to 0.1%
- UL listed, CSA 22.2 compliant
- RoHS compliance and lead free
- 5 Year, 50,000 hour standard warranty

#### **Lumens and Power**

80+ CRI, 3500K

#### **INDIRECT**

Lumens/ft	350	500	750	1000
Watts/ft	2.1	3.0	4.6	6.3
Lumens/W	170	168	164	159

#### **DIRECT**

Lumens/ft	350	500	750	1000
Watts/ft	4.4	6.3	13.2	13.0
Lumens/W	82	81	56	76

ERA4-4FT-3590-AL-DW110, tested at 3500K, 90+ CRI





Declare.



# **EDGE**Razor



# **Ordering Information**

PROJE(	

ERA4							
	 <i>j</i>	<b></b>		 в ——	_	с —	

 $\downarrow$ 

Α

LENGT	LENGTH		сст		CRI		COLOR	
2 4 6 8 C	2' 4' 6' 8' Custom lengths in 6" increments	27 30 35 40 SL1 SBIOS DBIOS TW2 RGB RGBW	2700K 3000K 3500K 4000K SunLike Static Bios Dynamic Bios Tuneable White 2CH Red, Green, Blue Red, Green, Blue, White	80 90 95	80CRI+ 90CRI+ 95CRI+	AL WT BK RAL_	Clear Anodized White Black RAL #	

В

DIRECT BEA	DIRECT BEAM		DIRECT OUTPUT		AM	INDIRECT OUTPUT	
DW110	Wide 110°	35 50 75 100	350lm/ft 500lm/ft 750lm/ft 1000lm/ft	IC120	Cosine 120°	35 50 75 100	350lm/ft 500lm/ft 750lm/ft 1000lm/ft

C

MOUNTING		VOLTAGE		EMERGENCY		DRIVER		
P96WT P48BK P96BK	48WT 96WT 96WT 96" Pendant PoC Kit White 96BK 96" Pendant PoC Kit Black 96" Pendant PoC Kit Black 96" Pendant PoC Kit Black 347       UNV 120/277V 120/27V 120/		120V 277V	O EM	None Emergency Driver	FD01 FD10 LDE1 LDE5 ELD1 NA C_	1% Dim (0-10V) 10% Dim (0-10V) Lutron Hi-Lume 1% Dim Lutron 5 Series 5% Dim EldoLED 0.1% Dim Not included Custom (Add Note)	

**NOTES** 

# **EDGE**Razor



#### **Drivers & Electrical**

Remote, dimmable drivers are supplied in enclosures. Compatible with a wide range of dimmable drivers, control systems, and virtually all PoE systems.

### **Emergency Back-Up**

An integral emergency driver may be wired to 4ft sections. Other drivers are also available (not all integral; consult factory). Emergency circuits for use with building generators are also available.

#### **Finishes**

All luminaires are available in clear anodized aluminum, white powder coat, or black powder coat. Any RAL color may be specified.

## **Optics**

FlatLens® extruded acrylic optic provides excellent diffusion, high transmission, and no LED imaging. Acrylic optics are fully recyclable at end of life.

#### Construction

Extruded, recycled aluminum housing. Clear anodized and powder-coated extrusions are fully recyclable at end of life.

#### Joined Runs

Runs of any length may be specified and are composed of multiple, factory-engineered, joined sections.

### Sustainability

Every XICO product features SmartBeam® Technology, energy efficient LED solutions, high efficacy optical systems, considered material choices, and thoughtful supply chain management.

#### **Declare & Red List Free**

**Edge Series Declare Listing** 

# **Technology and Manufacturing**

XICO fixtures are engineered and manufactured in our Massachusetts factory with Fusion Optix® Inside. As LED engine and Optical system specialists XICO offers adjustment and customization to output, beam distribution, and color to meet the needs of your project.