ESL4-R

EDGESlot 4


Recessed


What to Know


Risk of fire and electrical shock. Installation requires knowledge of electrical systems and should be installed by a qualified electrician. If not qualified, **DO NOT ATTEMPT INSTALLATION.**





Connect power to the fixture. An enclosed driver box is provided which is fastened to the top of the fixture housing or loose for remote installation. Check to make sure you have a secure connection and that the fixture is wired correctly before moving to the next step. Refer to the wiring diagram.







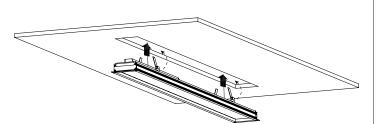







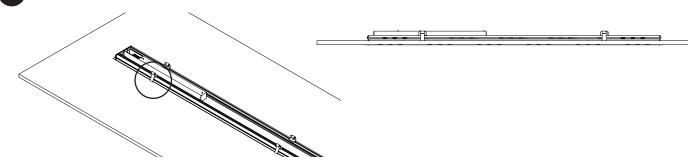


Care Instructions:


Wipe with a soft cloth only. Always avoid using harsh chemicals and/or cleaners.




EDGESlot 4

Continuous Run







You may be required to loosen a screw to free up the joiner bracket.



Center the bracket between the 2 fixtures. Secure one side of the joiner to the fixture housing.



Pull the fixtures together and tighten the remaining screws. Repeat steps for the other side of the fixture.



Care Instructions:

Wipe with a soft cloth only. Always avoid using harsh chemicals and/or cleaners.



EDGESlot 4

Wiring Diagram



