
NANOBeam Pendant 0.95" Compact Linear LED Pendant Mount

XICO®



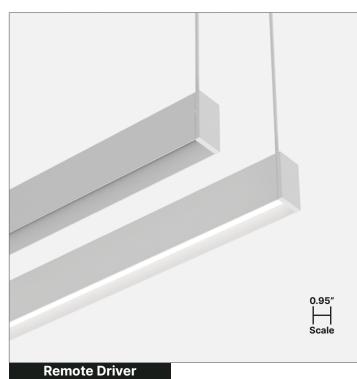

Features & Benefits

Exceptional Performance Up to 1,000 lm/ft, 135 lm/W efficacy

Wide Range of LED Selections Static, Tunable White, and Dim-to-Warm

Designed with Options Wide choice of SmartOptic[®] lenses, beam distributions, 80/90/95+ CRI, 2200K to 5000K CCT, and 0-10V, DALI, DMX, and TRIAC dimming

Patented Innovations Fusion[®] Optix Inside with unique SmartBeam[®] capabilities

Proprietary Optical Components Provides excellent light distribution and high-transmission

Committed to Sustainability Declare Listed and Red Free List materials

Compliance UL Listed, Dry and Damp Locations

5-Year Warranty Standard 5-year warranty, 50,000 hours

BOSTON C

Designed & Built in





FIXTURE ORDERING

1) FIXTURE DESIGN

Project Name

Fixture Type

PRODUCT	LEN	GTH	FINISH	I	END	САР	ΟΡΤΙΟ	(DIRECT ONLY)
NBE95-P								
0.95" Compact Linear LED Pendant Mount	2 4 6 8 10 X_	2' 4' 6' 8' 10' Specify X', Y''	MWH MBK MGR CAE RAL_	Matte White (RAL9003) Matte Black (RAL9005) Matte Gray (RAL7001) Clear Anodized Effect Specify RAL#	E1	Flat End Cap	ORL OCR ONBV ONBB	(Requires Regressed Lens)

2) LED LIGHT ENGINE

CRI		сст		DIRECT BE	AM PATTERN	DIRE	CT OUTPUT	INDIRECT	BEAM PATTERN	INDIR	ECT OUTPUT
S80 S90 HE80 HE90 HD95 SUN SBIOS DBIOS TBIOS	Std. 80 CRI Std. 90 CRI High-Eff. 80 CRI High-Eff. 90 CRI High-Def. 95 CRI Full SunLike Static BIOS Dynamic BIOS Tunable White BIOS	22 27 30 35 40 50 3022D 3527D	2200K 2700K 3000K 3500K 4000K 5000K 3000K to 2200K Dim-to-Warm 3500K to 2700K Dim-to-Warm	DLAM DBW60 DDA70 DA5025 DA4005 DM55 DN40 X_	Lambertian Batwing 60° Double Asymmetric 70° Asymmetric 50° at 25° Tilt Asymmetric 40° at 5° Tilt Medium 55° Narrow 40° Specify Beam	35 50 75 100 X_	350 lm/ft 500 lm/ft 750 lm/ft 1,000 lm/ft Specify lm/ft	NN ILAM IBW120 IFT150 IA6040 IA4560 X_	Not Needed Lambertian Batwing 120° FlatTop 150° Asymmetric 60° at 40° Tilt Asymmetric 45° at 60° Tilt Specify Beam	NN 35 50 75 100 X_	Not Needed 350 lm/ft 500 lm/ft 750 lm/ft 1,000 lm/ft Specify lm/ft
		X_	Specify CCT								

3) FIXTURE POWER & CONTROLS

LINE \	LINE VOLTAGE (DC) REMOTE DRIVER (POWER)		EMER	EMERGENCY BACKUP		REMOTE DRIVER BOX ²		CONTROL SYSTEM ⁴	
UNV	120/277V	FDND	Factory Non-Dimming	NN	Not Needed	NN	Not Needed	NN	Not Needed
347	347V	FD01	Factory 0-10V 1% Dim	EMC	Emergency Circuit	RLDB ³	Remote Linear Driver Box	LUT	Lutron
		FD10	Factory 0-10V 10% Dim	EMB	Emergency Battery		(driver included by default)	C00	Cooper
		FDDA	Factory DALI 0.1% Dim		(10 W — Remote)	RX2D ³	Optional Remote XBox2	CAS	Casambi
		FDDX	Factory DMX Dim	X_	Specify Backup		Driver, Up to 2 Drivers	X_	Specify Control
		FDTR	Factory TRIAC Dim			RX3D ³	Optional Remote XBox3		System
		LD01	Lutron Hi-Lume 1% Dim				Driver, Up to 3 Drivers		
		LD05	Lutron 5-Series 5% Dim			RX5D ³	Optional Remote XBox5		
		ED00	eldoLED 0-10V 0.1% Dim				Driver, Up to 5 Drivers		
		ED01	eldoLED 0-10V 1% Dim						
		EDDA	eldoLED DALI 0.1% Dim						

4) FIXTURE MOUNTING & CONNECTIONS

Specify Driver

Χ_

МО	MOUNTING TYPE		CANOPY		ORD
DJ T1 T2 T3	Drywall/J-Box Mount 9/16" Flat T-Bar Mount 9/16" Bolt Slot T-Bar Mount 15/16" Flat T-Bar Mount	RCWH2 RCBK2 RCWH5 RCBK5 SQCWH2 SQCBK2 SQCBK5	2" Round Canopy, White 2" Round Canopy, Black 5" Round Canopy, White 5" Round Canopy, Black 2" Square Canopy, Black 5" Square Canopy, White 5" Square Canopy, Black	Р48WH Р48ВК Р96WH Р96ВК	48" White Cord (Ø 1/8") 48" Black Cord (Ø 1/8") 96" White Cord (Ø 1/8") 96" Black Cord (Ø 1/8")

Footnotes: ¹ Continuous Regressed Lens ships on a roll for seamless lens installation. ² Remote distance is dependent on driver type, up to 100' (30.5 m). ³ Creates a clean and organized power solution for multiple fixture installations. ⁴ The control system and driver must be compatible.

NANOBeam Pendant




NOTES

Fixture Type

REMOTE DRIVER BOX

Dimensions

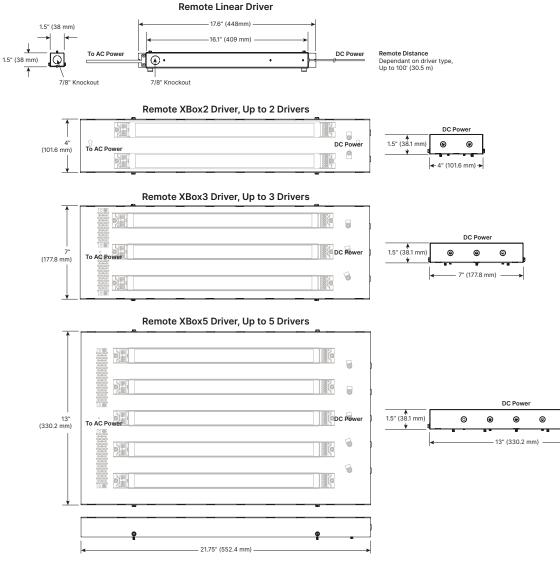


0

FIXTURE DESIGN


Dimensions




To download BIM (Revit) Files, please click or scan the QR Code.

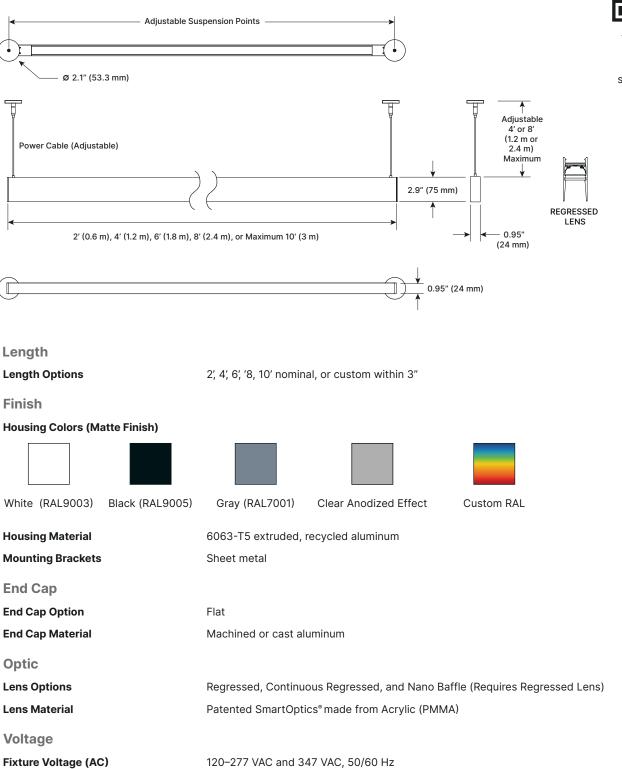


LED SELECTION GUIDE




HD95: High-Definition 95+ CRI






SUN: Full Spectrum "SunLike"




380 430 480 530 580 630 680 730 780

HE80: High-Efficiency 80+ CRI


HCD: Human Centric Day



HE90: High-Efficiency 90+ CRI



HCN: Human Centric Night



Static White Light (LED Light Engine Only)

		TYPICAL LED DATA							
CODE	DESCRIPTION	ССТ	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	M/P Ratio	LPW
S80	Standard 80 CRI	3500K	82.5	7.8	84	96.7	82.5	0.51	190
S90	Standard 90 CRI	3500K	91	54.3	89.3	98.9	89.2	0.55	175
HE80	High Efficiency 80 CRI	3500K	82.1	5.9	83	94.2	81.2	0.52	210
HE90	High Efficiency 90 CRI	3500K	92.2	90	90.7	103.8	92.1	0.56	190
HD95	High Definition 95 CRI	3500K	97.1	95	-	-	_	0.70	163
SUN	Full Spectrum SunLike®	3500K	95	85	-	-	-	-	130
HCD	Human Centric Day	4000K	83	95	-	-	-	0.92	155
HCN	Human Centric Night	2700K	80	_	_	_	_	0.44	134

LPW Efficacy Conversion Chart

	CCT SELECTED										
CODE	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K			
S80	_	0.91	0.96	1.00	1.04	1.11	1.11	1.11			
S90	_	0.91	0.96	1.00	1.04	1.11	1.11	1.11			
HE80	-	0.96	0.99	1.00	1.03	1.04	1.03	1.03			
HE90	_	0.91	0.96	1.00	1.04	1.11	N/A	N/A			
HD95	_	0.91	0.96	1.00	1.04	1.11	1.03	1.04			
SUN95	_	0.90	0.92	1.00	1.01	1.07	1.04	1.05			
HCD	_	N/A	0.96	1.00	1.04	1.04	1.04	1.04			
HCN	_	0.87	0.96	1.00	1.04	N/A	N/A	N/A			


To learn more about BIOS Technology,

please click or scan the QR Code.

BIOS TECHNOLOGY

Choosing Your BIOS Solution

BIOS is offered in four Circadian LED Solutions with BIOS SkyBlue Technology -Biological Static, Biological Dynamic, Biological Tunable, and Biological Dim-to-Warm. BIOS SkyBlue[™] Technology includes a blue peak at 490nm that provides an effective daytime circadian signal using standard architectural color temperatures.

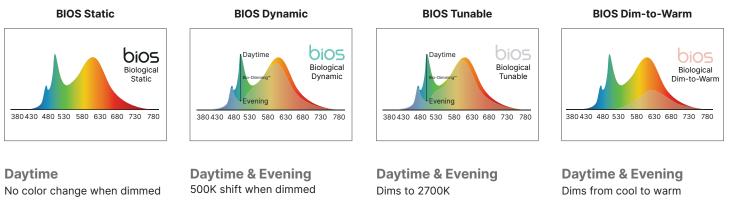

Spaces that operate during daytime hours — 7am and 7pm

Spaces that operate overnight - after 7pm and before 7am

Spaces that operate with overnight shifts — after 7pm and before 7am

Spaces where people sleep ---after 7pm and before 7am

Circadian and Human Centric Light

			BIO	-DIMMING MOD	ULE TECHNOI	OGY GUIDE	
CODE	DESCRIPTION	Driver	Driver Voltage	ССТ	Requires BIO-Dimming Module	Lighting Control	BIOS SkyBlue (490nm)
SBIOS	BIOS Static	DIM1	0-10V Dimming to 1% Dim-to-Dark	No CCT Change	No	Intensity Dimming Control Only	Always Present
DBIOS	BIOS Dynamic		0-10V Intensity		Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming
DBIOS-2	BIOS Dynamic (Two Channel)	BIODIM1	Dimming to 1% Dim-to-Dark	500K Shift	No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"
TBIOS	BIOS Tunable		0-10V Control of Intensity & CCT on Separate 2 Channels / DALI Control of Intensity & CCT on Separate 2 Channels	Dims to 2700K	Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming
TBIOS-2	BIOS Tunable (Two Channel)	ATW / DTW			No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"
DWBIOS	BIOS Dim-to-Warm				Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming
DWBIOS-2	BIOS Dim-to-Warm (Two Channel)	_	_	Dims to 2200K	No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"

SMARTBEAM® TECHNOLOGY

The Ultimate Control of Lighting Distributions

SmartBeam makes it easy to specify the exact light required for any architectural space. Available in every XICO product; it is now possible to create truly tailored and engaging lighting that transform spaces, improves visual comfort, and saves energy.

FIXTURE POWER & CONTROLS

Voltage LED Driver	Factory Selected, 36–39V Constant Current
Emergency Backup	
Backup Types	Emergency Circuit, Emergency Battery (Remote), and other emergency backups are available
Wiring	Typically the Emergency Backup is wired to 48" sections
Power	10 W
Illumination Time	90 minutes
Partners	







Control Systems	Remote Drivers (Sold Separately)
Other	Factory Non-Dimming, Factory 0-10V 1% Dim, Factory 0-10V 10% Dim, Factory DALI 0.1% Dim, Factory DMX Dim, Factory TRIAC Dim, eldoLED 0-10V 0.1% Dim, eldoLED 0-10V 1% Dim, eldoLED DALI 0.1% Dim, and other drivers are available, consult factory (not all integral)
Lutron	Hi-Lume 1% Dimming and 5-Series 5% Dimming
Cooper	Compatible driver
Casambi (wireless)	Compatible driver
ХВох	
Remote Driver Boxes (Optional)	To create a clean and organized power solution for multiple fixture installations see our XBox Specification Guide. Reach out to a XICO Sales Representative to discuss you projects needs.

To learn more about our SmartBeam Technology, please click or scan the QR Code.



NANOBeam Pendant

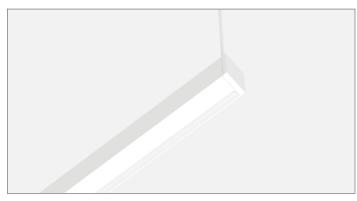

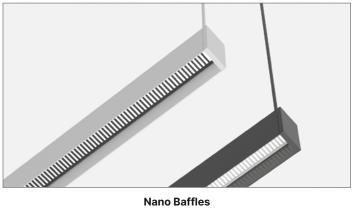

Regressed Lens

Nano Baffles

FIXTURE MOUNTING & CONNECTIONS


Mounting Type

T-Bar Mount Installs into a ceiling grid system and mount on to, or replace, typical T-Bar elements. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements. **Drywall/J-Box Mount** Installs onto a surface via a junction box. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements. Canopy **Canopy Sizes & Shapes** 2" and 5", Round and Square **Canopy Colors** White (RAL9003) Black (RAL9005) Powder Coated Steel **Canopy Material Power Cords** 48" Cable Kit White and Black 96" Cable Kit White and Black **Mounting Options** Typically suspended at a distance DJ - Drywall/J-Box Mount T1 - 9/16" Flat T-Bar Mount T2 - 9/16" Bolt Slot T-Bar Mount T3 - 15/16" Flat T-Bar Mount of between 24" and 72". Supplied

•Remote Drivers (optional XBox Drivers are sold separately)

hardware includes:


- •48" or 96" standard adjustable cord
- Internal brackets to eliminate light leakage at joints

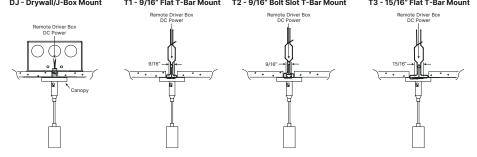


Standard Lengths & Continuous Runs

Maximum length of one fixture is 10'. Longer runs can be produced by joining sections. Customer approval of shop drawings is required prior to build of any non-standard length order.

Lens can be supplied in a maximum 250' roll length with Continuous FlatLENS Optics to be installed on-site for a seamless light surface.

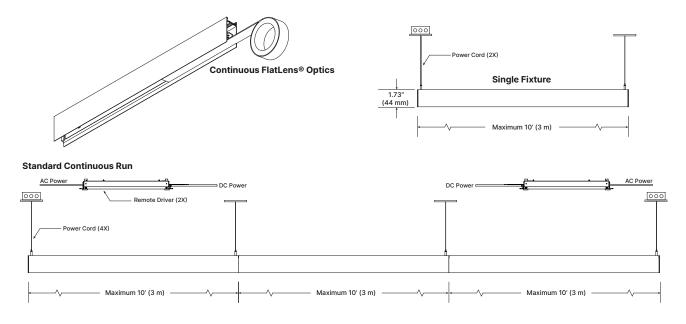

Emergency Battery Backup

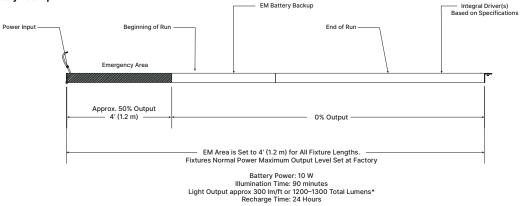

*Light output may vary based on fixture output level ordered

STANDARDS & CERTIFICATIONS



Declare Listed

Declare labels provide a quick and reliable way to make choices about the environmental footprint and safety of the product. Declare is internationally recognized and the labels can be found on the product, product packaging, or company website. Visit xicoled.com for Declare Listed details.



Red List Free

An industry standard certification for LED lighting products based on the International Living Future Institute (ILFI). These products only use materials based on the "Red List of Toxic Chemicals" (a list of chemicals and materials known to be hazardous to people and/or the Earth) that are safe, healthy, and environmentally sustainable.

Certifications

Compliance

Certifications

BAA & TAA compliant in-house manufacturing in Boston, MA with North American supply chain

()	RoHS

Sustainability	Declare Listed and Red List Free
Packaging	Low carbon, environmentally conscious packaging and shipping methods
Environmental Suitability	
IP Rating	Suitable for Dry and Damp Locations, indoor use only
Recyclable	SmartOptics and all powder coated and anodized parts are fully recyclable at end of life
Reliability	
Manufacturing	All XICO products and associated optics and LED engines are assembled at our factory in Woburn, MA
Quality Assurance	Each product is engineered reliability and quality assurance tested

Warranty & Terms

5-YR Warranty




Business Terms

For details on our warranty and business terms, please click or scan the QR Code.

	BEAM PATTERN								
OPTIC	DLAM	DBW60	DDA70	DA5025	DA4005	DM55	DN40		
Regressed Lens	•	•	•	•	•	•	•		
Nano Baffle	•	•	•	•	•	•	•		


DIRECT PHOTOMETRICS

DLAM: Lambertian



Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	3,000
lm/ft	765
Watts	27
W/ft	7
LPW	111

DM55: Medium 55°




Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	3,000
lm/ft	742
Watts	23
W/ft	6
LPW	129




Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	3,000
lm/ft	744
Watts	24
W/ft	6
LPW	123

DDA70: Double Asymmetric 70°



Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	3,000
lm/ft	760
Watts	25
W/ft	6
LPW	123


DA5025: Asymmetric 50° at 25° Tilt



Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	3,000
lm/ft	749
Watts	23
W/ft	6
LPW	130


Static White Light

DA4005: Asymmetric 40° at 5° Tilt



Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	3,000
lm/ft	738
Watts	23
W/ft	6
LPW	128

DN40: Narrow 40°



Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	3,000
lm/ft	746
Watts	26
W/ft	6
LPW	116

INDIRECT PHOTOMETRICS

ILAM: Lambertian

Length

Lumens

lm/ft

Watts

W/ft

LPW

LED

48"

CRI/CCT 80+/3500K

HE80

4,000

1,000

28

7

150



Length

CRI/CCT

Lumens

lm/ft

Watts

W/ft

LPW

LED

48"

HE80

4,000

1,002


25

6.3

159

80+/3500K





Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	4,000
lm/ft	1,004
Watts	26
W/ft	6.5
LPW	155

IA6040: Asymmetric 60° at 40° Tilt

Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	4,000
lm/ft	1,000
Watts	19
W/ft	150
LPW	164

Static White Light

IA4560: Asymmetric 45° at 60° Tilt

Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	4,000
lm/ft	1,000
Watts	19
W/ft	150
LPW	164

PATENTS & TRADEMARKS



To learn more about our unique technologies, please click or scan the QR Code.

Utility Patents

United States	US11543582, US11520097, US11512466, US11441749, US11396751, US11333822, US11163104, US11156762, US10852466, US10068447, US8953926, US8948564, US8911099, US8876348, US8794812, US8783898, US8761565, US8750671, US8721152, US8619363, US8430548, US8408775, US8249408, US8231256, US8177408, US8033706, US8033674, US7991257, US7914192, US7784954, US7758227, US7722224, US7542635, US7453636, US7453635, US7431489, US7408707, US7278775, US6369944, US6346311, US6123877, US5932342, US5837346, US20220373144, US20220372752, US20220364708, US20220357006, US20220357005, US20220342141, US202209432, US2022006210A1, US20220171119A1, US20220171115A1, US20220162856A1, US20220162853A1, US20220146063A1, US20220137287, US20210301991A1, US20200355345A1, US20200217071A1, US20220333765A1, US2022028366A1, US20220196906A1, US20220010554A1, US20080043490A1, US20060290253A1, US20060215958A1, US20120321247, US20120250330, US20120099204
Canada	CA2702600, CA2702685, CA2702690
France	FREP0800658
Germany	DEEP0800658
Great Britain	GB2492541, GB2492542, GBEP0800658, GB2492398
Japan	JP03958359
Netherlands	NLEP0800658
Taiwan	FTW360813B
European Patent Organization	EP0843203, EP0843203

Design Patents

United States

USD719282, USD717973, USD669606, USD669608, USD669609, USD669614, USD663056

The Patent Corporation Treaty

World Intellectual	WO2015200268
Property Organization	

Trademarks

United States

US6672871, US6397231, US6373493, US6257728, US6190558, US6190559, US6142905, US6114408, US6038234, US6025279, US6060740, US6257729, US5856164, US5734112, US5543304, US5309290, US5309315, US4691124, US4640751



XICOLED.COM SALES@XICOLED.COM (781) 995-0805

©Copyright 2023. XICO[®] is a registered trademark. The information provided herein is subject to change, without notice.
DOC-1020-00 Rev D