


MICROSquare MCO Wall


XICO®

1.4" Linear with Micro Cavity Optics

Direct+Indirect

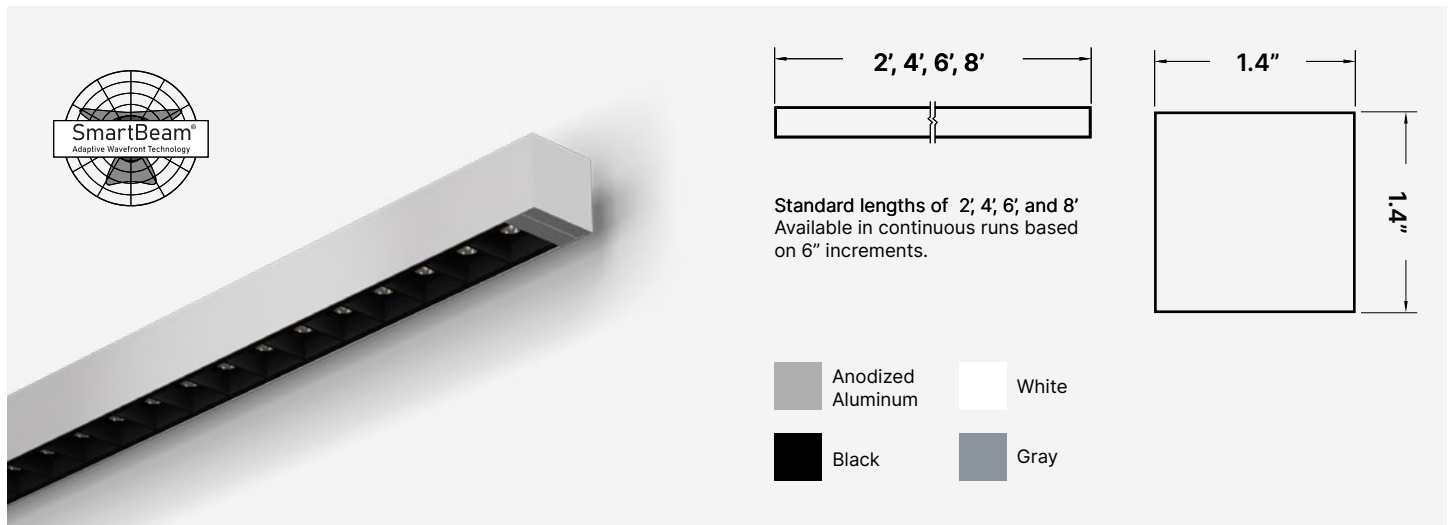

MCO



MIX

DESIGNED, ENGINEERED, AND
MANUFACTURED IN USA

Design

MICROSquare 1.4 is a 1.4" square linear, bringing SmartBeam® capabilities to a scale designed to compliment architectural space. MICROSquare features a remote driver to remove visual bulk.

Features

- High efficacy combined 135lm/W
- Square profile: 1.4" (35mm) x 1.4" (35mm)
- SpekLED® & SmartOptics® inside
- 80+/90+ CRI, 2700K-4000K specifications
- Dimming down to 0.1%
- UL listed, CSA 22.2 compliant
- RoHS compliance and lead free
- 5 Year, 50,000 hour standard warranty

Lumens and Power

80+ CRI, 3500K

INDIRECT

Lumens/ft	350	500	750	1000
Watts/ft	2.1	3.0	4.7	6.4
Lumens/W	168	167	162	158

DIRECT

Lumens/ft	350	500	750	1000
Watts/ft	3.9	5.8	9.1	12.8
Lumens/W	88	85	82	78



Declare.



MICROSquare MCO Wall

XICO®

Ordering Information

PROJECT

MSQ140-W

1	2	3	4	5	6	7	8	9	10	11	12
---	---	---	---	---	---	---	---	---	----	----	----

A	B	C
---	---	---



A

1	2	3	4
LENGTH	CCT	CRI	FINISH COLOR
2	2'	27	2700K
4	4'	30	3000K
6	6'	35	3500K
8	8'	40	4000K
C_	Custom lengths in 6" increments	SL1	SunLike
		SBIOS	Static Bios
		DBIOS	Dynamic Bios
		TW2	Tuneable White 2CH
		RGB	Red, Green, Blue
		RGBW	Red, Green, Blue, White
		80	80CRI+
		90	90CRI+
		95	95CRI+
		AL	Clear Anodized
		WT	White
		BK	Black
		GY	Gray
		RAL_	RAL #

B

5	6	7	8
DIRECT BEAM	DIRECT OUTPUT	INDIRECT BEAM	INDIRECT OUTPUT
DMCO15	Micro Cavity Optics 15°	35	350lm/ft
DMCO25	Micro Cavity Optics 25°	50	500lm/ft
DMCO45	Micro Cavity Optics 45°	75	750lm/ft
		100	1000lm/ft
		IC150	Cosine 150°
		ICW4060	Ceiling Wash 40° at 60° Tilt
		35	350lm/ft
		50	500lm/ft
		75	750lm/ft
		100	1000lm/ft

C

9	10	11	12
MOUNTING	VOLTAGE	EMERGENCY	ONBOARD DRIVER
WM	Wall Mount Kit	UNV	120/277V
C_	Custom (Add Note)	120	120V
		277	277V
		347	347V
		0	None
		EM	Emergency Driver
		FD01	1% Dim (0-10V)
		FD10	10% Dim (0-10V)
		LDE1	Lutron Hi-Lume 1% Dim
		LDE5	Lutron 5 Series 5% Dim
		ELD1	EldoLED 0.1% Dim
		NA	Not included
		C_	Custom (Add Note)

NOTES

MICROSquare MCO Wall



Beam Distributions

Light plays a key role in the designed space. Whether the goal is to define spatial borders, emphasize architectural details or deliver functional task lighting, SmartBeam® technology packs a variety of beam options into every XICO® product.

SmartBeam® is a family of adaptive wavefront technologies, developed with the single purpose to deliver the ultimate controlled specification-grade lighting distribution and colors to your fingertips.

INDIRECT



Cosine®



Ceiling Wash

DIRECT



Micro Cavity Optics


	Office	Lobby	Aisleway	Wall Wash	Grazer	Cove	Warehouse	Benefits
Batwing	•	•					•	Low-glare even distribution, ideal for most applications
Wide	•	•					•	Provides excellent coverage for general lighting installations
Medium	•	•					•	Delivers Uniform fc distribution without pixelation
Asymmetric	•	•		•		•		Ideal for perimeter lighting
Double Asymmetric	•		•				•	Exceeds DLC Aisleway Compliance
Narrow	•	•			•	•	•	High CBCP for long throw applications
Grazer/Spot	•	•			•	•		Uniform coverage meeting tight min:max ratio

MICROSquare MCO Wall

ColorTune™ Technology

Lighting products with ColorTune™ technology in combination with XICO® LED engines deliver color control, producing superior color rendering and wavelength conversion.

ColorTune™ products utilize a unique collection of micron scale optical elements to diffuse, shape, reflect and manipulate light and colors in a broad range of LED optical systems.

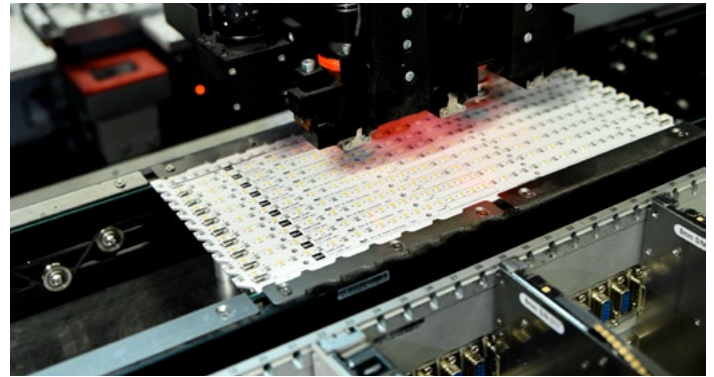


Fusion Optix® manufacturing LED engines in Woburn, MA

90+ CRI Standard


Advancements in LED efficiency, combined with SmartBeam high efficacy optical systems, enables 90+ CRI as standard across all XICO products without compromises.

CCT	CIE Ra	TM-30 Rf	TM-30 Rg
3500K	94	90	103

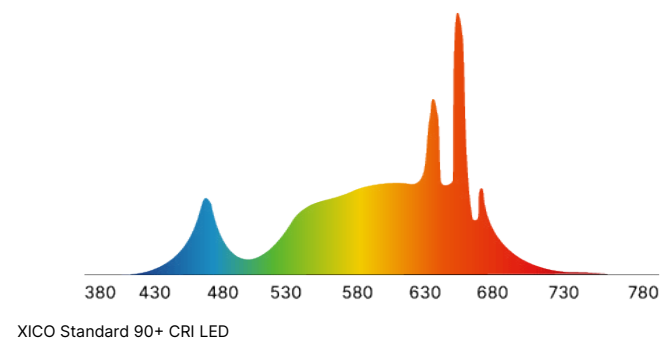


Full Spectrum, Tunable Control

XICO's in-house LED engine design and assembly allows for custom offerings in every category. Full Spectrum, Dim-to-warm, Tunable-White, RGBW, and application specific custom configurations.

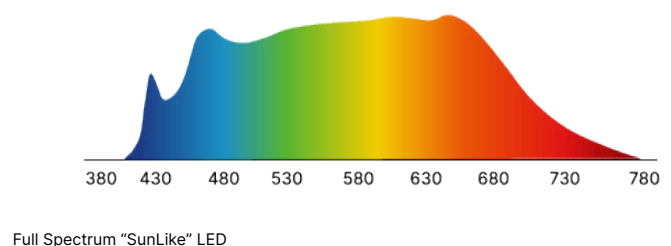

Human-Centric Lighting

Unique LED technologies, in conjunction with fixture and optical system design, deliver biological and psychological stimulus. Energizing light during the day and sleep-supporting light in the evening.

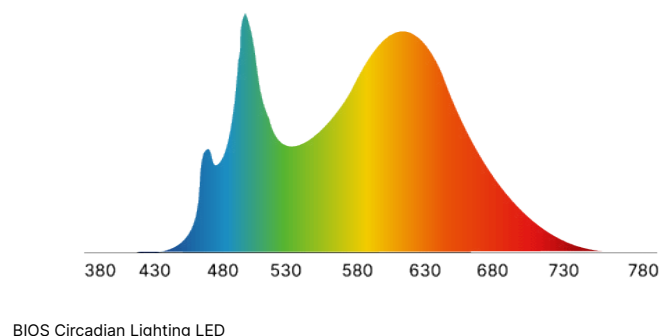

MICROSquare MCO Wall



Drivers & Electrical

Remote, dimmable drivers are supplied in enclosures. Compatible with a wide range of dimmable drivers, control systems, and virtually all PoE systems.

Emergency Back-Up

An integral emergency driver may be wired to 4ft sections. Other drivers are also available (not all integral; consult factory). Emergency circuits for use with building generators are also available.

Finishes

All luminaires are available in clear anodized aluminum, white powder coat, or black powder coat. Any RAL color may be specified.

Optics

FlatLens® extruded acrylic optic provides excellent diffusion, high transmission, and no LED imaging. Acrylic optics are fully recyclable at end of life.

Construction

Extruded, recycled aluminum housing. Clear anodized and powder-coated extrusions are fully recyclable at end of life.

Joined Runs

Runs of any length may be specified and are composed of multiple, factory-engineered, joined sections.

Sustainability

Every XICO product features SmartBeam® Technology, energy efficient LED solutions, high efficacy optical systems, considered material choices, and thoughtful supply chain management.

Declare & Red List Free

[Micro Series Declare Listing](#)

Technology and Manufacturing

XICO fixtures are engineered and manufactured in our Massachusetts factory with Fusion Optix® Inside. As LED engine and Optical system specialists XICO offers adjustment and customization to output, beam distribution, and color to meet the needs of your project.