




# PROBeam 4



## 2" Beam Linear


Direct

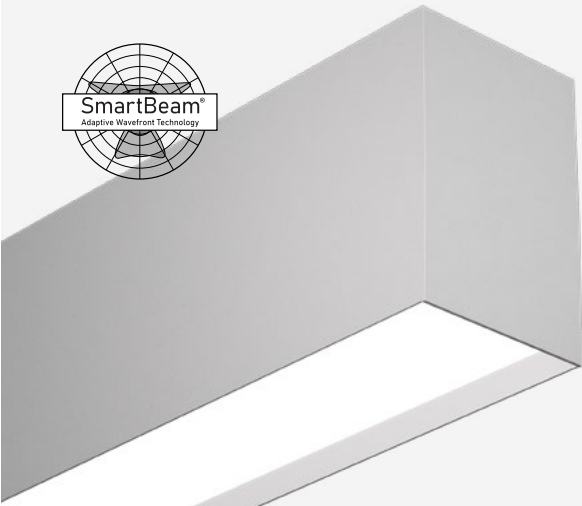




2', 4', 6', 8'


Standard lengths of 2', 4', 6', and 8'  
Available in continuous runs based  
on 6" increments.





4"

6"

 Anodized Aluminum

 White

 Black

 Gray



DESIGNED, ENGINEERED, AND  
MANUFACTURED IN USA

### Design

PROBeam 4 brings SmartBeam® capabilities to a 4" form factor with integral driver. PROBeam 4 is available in a wide variety of diameters, full rings (360°), radius (180°, 90°, 45°), and angle sectional curvers, in addition to linear lengths.

### Features

- High efficacy combined 150lm/W
- Beam profile: 4" (101.6mm) x 6" (152.4mm)
- 80+/90+ CRI, 2700K-4000K specifications
- Dimming down to 0.1%
- UL listed, CSA 22.2 compliant
- Recycled aluminum housing
- RoHS compliance and lead free
- 5 Year, 50,000 hour standard warranty

### Lumens and Power

90+ CRI, 3500K

#### DIRECT

Lumens/ft	350	500	750	1400
Watts/ft	2.3	3.2	4.9	9.5
Lumens/W	157	156	154	147



# PROBeam 4

# XICO®

## Ordering Information

PROJECT 

A

1	2	3	4
<b>LENGTH</b>		<b>CCT</b>	<b>CRI</b>
2	2'	27	2700K
4	4'	30	3000K
6	6'	35	3500K
8	8'	40	4000K
C_	Custom lengths in 6" increments		
		<b>FINISH COLOR</b>	
		WT	White
		BK	Black

B

5	6
<b>DIRECT BEAM</b>	<b>DIRECT OUTPUT</b>
DW110 Wide 110°	35 350lm/ft
	50 500lm/ft
	75 750lm/ft
	100 1000lm/ft

C

9	10	11	12
<b>MOUNTING</b>	<b>VOLTAGE</b>	<b>EMERGENCY</b>	<b>INTEGRAL DRIVER</b>
S Surface Mount	UNV 120/277V	0 None	FD01 1% Dim (0-10V)
T1 9/16" T-bar Clip		EM Emergency Driver	FD10 10% Dim (0-10V)
T2 9/16" Bolt T-bar Clip			LDE1 Lutron Hi-Lume 1% Dim
T3 15/16" T-bar Clip			LDE5 Lutron 5 Series 5% Dim
S48W 48" Power Cable Kit White			ELD1 EldoLED 0.1% Dim
S96W 96" Power Cable Kit White			NA Not included
S48B 48" Power Cable Kit Black			
S96B 96" Power Cable Kit Black			

PBE4

1	2	3	4	5	6	9	10	11	12
A			B			C			

## NOTES

## Drivers & Electrical

Remote, dimmable drivers are supplied in enclosures. Compatible with a wide range of dimmable drivers, control systems, and virtually all PoE systems.

## Emergency Back-Up

An integral emergency driver may be wired to 4ft sections. Other drivers are also available (not all integral; consult factory). Emergency circuits for use with building generators are also available.

## Finishes

All luminaires are available in clear anodized aluminum, white powder coat, or black powder coat. Any RAL color may be specified.

## Optics

FlatLens® extruded acrylic optic provides excellent diffusion, high transmission, and no LED imaging. Acrylic optics are fully recyclable at end of life.

## Construction

Extruded, recycled aluminum housing. Both anodized and powder-coated extrusions are fully recyclable at end of life.

## Joined Runs

Runs of any length may be specified and are composed of multiple, factory-engineered, joined sections.

## Sustainability

Every XICO product features SmartBeam® Technology, energy efficient LED solutions, high efficacy optical systems, considered material choices, and thoughtful supply chain management.

## Technology and Manufacturing

XICO fixtures are engineered and manufactured in our Massachusetts factory with Fusion Optix® Inside. As LED engine and Optical system specialists XICO offers adjustment and customization to output, beam distribution, and color to meet the needs of your project.