


# PROBeam3 Surface


Direct | Standard Lengths

Project Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

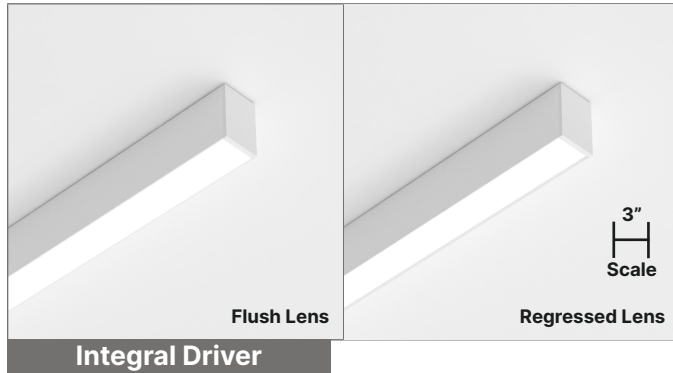

## LIGHTING CONFIGURATIONS

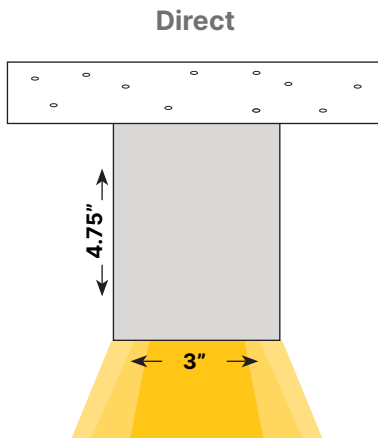

## DESCRIPTION

### 3" High-Performance Linear LED Surface Mount

PROBeam3 Surface brings SmartBeam® capabilities to a 3" form factor with an integral driver providing best-in-class efficiency and beam control options. The PROBeam3 Surface is designed to be specification grade with a wide range of beam options, high CRI, and circadian options. The 3" aperture delivers comfortable illumination in a wide range of beam distributions while achieving high efficacy, and energy-saving performance. PROBeam3 Surface offers a range of accessories, mounting options, and finishes that provide an easy route to customization and performance enhancements.

## FEATURES & BENEFITS

### Exceptional Performance

Up to 1,500 lm/ft, 150 lm/W efficacy

### Wide Range of LED Selections

Static, Tunable White, and Dim-to-Warm

### Designed with Options

Wide choice of SmartOptic® lenses, beam distributions, 80/90/95+ CRI, 2700K to 6500K CCT, and 0-10V, DALI, DMX, and TRIAC dimming

### Patented Innovations

Fusion® Optix Inside with unique SmartBeam® capabilities

### Proprietary Optical Components

Provides excellent light distribution and high-transmission

### Committed to Sustainability

Declare Listed and Red Free List materials

### Compliance

UL Listed, Dry and Damp Locations

### 5-Year Warranty

Standard 5-year warranty, 50,000 hours

Declare



bios



Designed & Built in  
**BOSTON**

## FIXTURE ORDERING

Project Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

## 1) FIXTURE DESIGN

PRODUCT	FIXTURE LENGTH	FINISH	END CAP STYLE
<b>PBE3-S</b> 3" High-Performance Linear LED Surface Mount	<b>2</b> - 2 ft <b>4</b> - 4 ft <b>6</b> - 6 ft <b>8</b> - 8 ft <b>X_</b> - Specify Ft', In"  Custom fixtures are available in 3" increments beyond standard lengths.	<b>Powder Coated</b> <b>PMW</b> - Matte White <b>PMB</b> - Matte Black <b>PMG</b> - Matte Gray <b>PRAL_</b> - Specify RAL #  <b>Anodized</b> <b>ACL</b> - Clear Anodized <b>ACU_</b> - Custom Anodized #	<b>E1</b> - Flat End Cap

## 2) LED LIGHT ENGINE

CRI	CCT	OPTIC (DIRECT ONLY)	DIRECT BEAM PATTERN	DIRECT OUTPUT
<b>80</b> - Std. 80 CRI <b>90</b> - Std. 90 CRI <b>95</b> - High-Def. 95 CRI <b>SUN</b> - Full SunLike	<b>27</b> - 2700K <b>30</b> - 3000K <b>35</b> - 3500K <b>40</b> - 4000K <b>XD</b> - Dim-to-Warm <b>XT</b> - Tunable <b>X_</b> - Specify CCT  Specify Dim-to-Warm and Tunable between 2700K-6500K.	<b>OFL</b> - Flush Lens <b>ORL</b> - Regressed Lens <b>OCRL</b> - Continuous Regressed Lens <sup>1</sup>	<b>DLAM</b> - Lambertian <b>DBW60</b> - Batwing 60° <b>DDA70</b> - Double Asym 70° <b>DA5025</b> - Asym 50° at 25° Tilt <b>DA4005</b> - Asym 40° at 5° Tilt <b>DM55</b> - Medium 55° <b>DN40</b> - Narrow 40° <b>X_</b> - Specify Beam <sup>2</sup>	<b>35</b> - 350 lm/ft <b>50</b> - 500 lm/ft <b>75</b> - 750 lm/ft <b>100</b> - 1,000 lm/ft <b>X_</b> - Specify lm/ft

## 3) FIXTURE POWER &amp; CONTROLS

LINE VOLTAGE (DC)	INTEGRAL DRIVER (POWER) <sup>3</sup>	
<b>UNV</b> - 120/277V <b>347</b> - 347V	<b>FDND</b> - Factory Non-Dimming <b>FD00</b> - Factory 0-10V 0.1% Dim <b>FD01</b> - Factory 0-10V 1% Dim <b>FD10</b> - Factory 0-10V 10% Dim <b>FDDA</b> - Factory DALI 0.1% Dim <b>FDDX</b> - Factory DMX Dim <b>FDTR</b> - Factory TRIAC Dim <b>LD01</b> - Lutron Hi-Lume 1% Dim <b>X_</b> - Specify Driver	Footnotes: <sup>1</sup> Continuous Regressed Lens ships on a roll for seamless lens installation. <sup>2</sup> Contact factory about custom beam options. <sup>3</sup> Standard driver box is included


## 4) FIXTURE MOUNTING &amp; CONNECTIONS

MOUNTING TYPE	POWER CORD	MOUNTING KIT
<b>SC1</b> - Surface Mount Clip <b>TC1</b> - 9/16" Flat T-Bar Mount <b>TC2</b> - 9/16" Bolt Slot T-Bar Mount <b>TC3</b> - 15/16" Flat T-Bar Mount  TC1, TC2 and TC3 clips directly to grid t-bar.	<b>P24W</b> - 24" White Cable Kit <b>P24B</b> - 24" Black Cable Kit	<b>SSMB</b> - Stainless Steel Surface Mounting Bracket

OPTIONAL	
EMERGENCY BACKUP	WIRELESS MODULE
<p><b>EMC</b> - Emergency Circuit  <b>EMB</b> - Emergency Battery (10 W — Remote)  <b>X_</b> - Specify Backup</p> <p>Specify requirements at time of order.</p>	<p><b>WCN</b> - Wireless Communication Node (Connected to LED Driver In-Fixture or In-Driver Box)  <b>PIR</b> - Wireless Communication Node + PIR Sensor (Standard Lens for Low Bay &lt; 10')  <b>MW</b> - Wireless Communication Node + MW Sensor (Standard for Low Bay &lt; 10')  <b>X_</b> - Other – Specify Embedded Component or Specific Non-Standard Sensor Detection Range</p>

DIMENSIONS & INSTALLATION

Dimensions

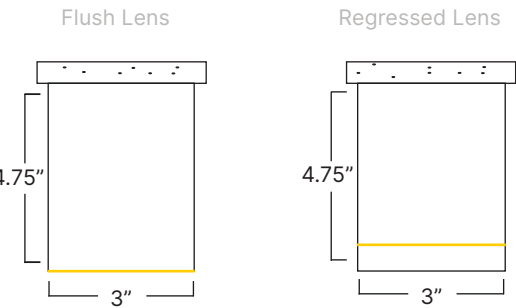

Standard Fixtures

2ft	23.05" / 23.4"
4ft	47.05" / 47.4"
6ft	71.05" / 71.4"
8ft	95.05" / 95.4"

Lens Length / Fixture Length


Mounting Type

- T-Bar Mount**

Installs into a ceiling grid system and mount on to, or replace, typical T-Bar elements. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements.
- Surface Mount**

Installs onto a surface. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements.

Mounting Type

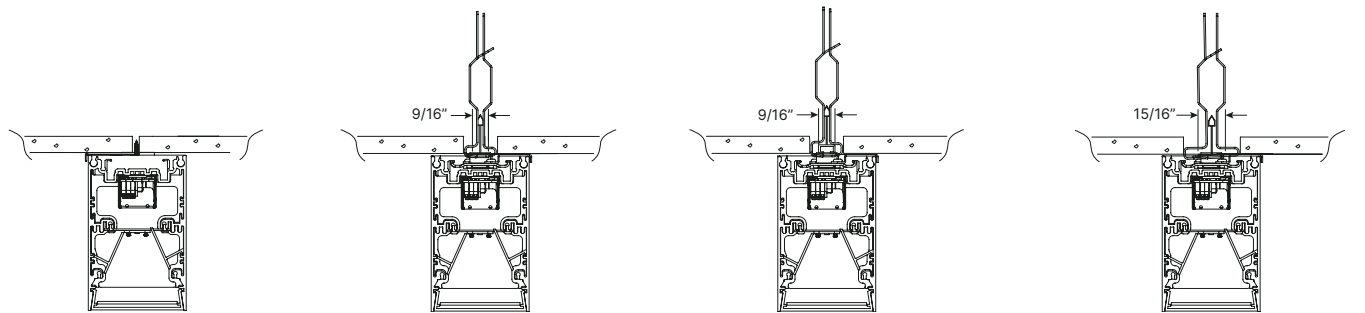

SC1 - Surface Mount Clip      T1 - 9/16" Flat T-Bar Mount      T2 - 9/16" Bolt Slot T-Bar Mount      T3 - 15/16" Flat T-Bar Mount

## SMARTBEAM® TECHNOLOGY


### The Ultimate Control of Lighting Distributions

SmartBeam makes it easy to specify the exact light required for any architectural space. Available in every XICO product; it is now possible to create truly tailored and engaging lighting that transform spaces, improves visual comfort, and saves energy.


To learn more about our SmartBeam Technology, please click or scan the QR Code.



### Direct Optics Choices



FL - Flush Lens



RL - Regressed Lens

DIRECT OPTICS	BEAM PATTERN						
	DLAM	DBW60	DDA70	DA5025	DA4005	DM55	DN40
Flush Lens							
Regressed Lens							

### LPW Efficacy Conversion Chart

CODE	CCT SELECTED							
	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
80	–	0.91	0.96	1.00	1.04	1.11	1.11	1.11
90	–	0.91	0.96	1.00	1.04	1.11	1.11	1.11
95	–	0.91	0.96	1.00	1.04	1.11	1.03	1.04
SUN	–	0.90	0.92	1.00	1.01	1.07	1.04	1.05

### LPW Performance


	DIRECT						
	DLAM	DBW60	DDA70	DA5025	DA4005	DM55	DN40
LM/W	142	145	138	143	139	137	136

$$\text{LM/W} = \frac{\left( \begin{array}{c} \text{DIRECT} \\ \text{LM/FT} \end{array} + \begin{array}{c} \text{INDIRECT} \\ \text{LM/FT} \end{array} \right)}{\left( \begin{array}{c} \text{DIRECT} \\ \text{W/FT} \end{array} + \begin{array}{c} \text{INDIRECT} \\ \text{W/FT} \end{array} \right)}$$




DIRECT PHOTOMETRICS

48" Length, 80+/3500K CRI/CCT, 3,000 Lumens

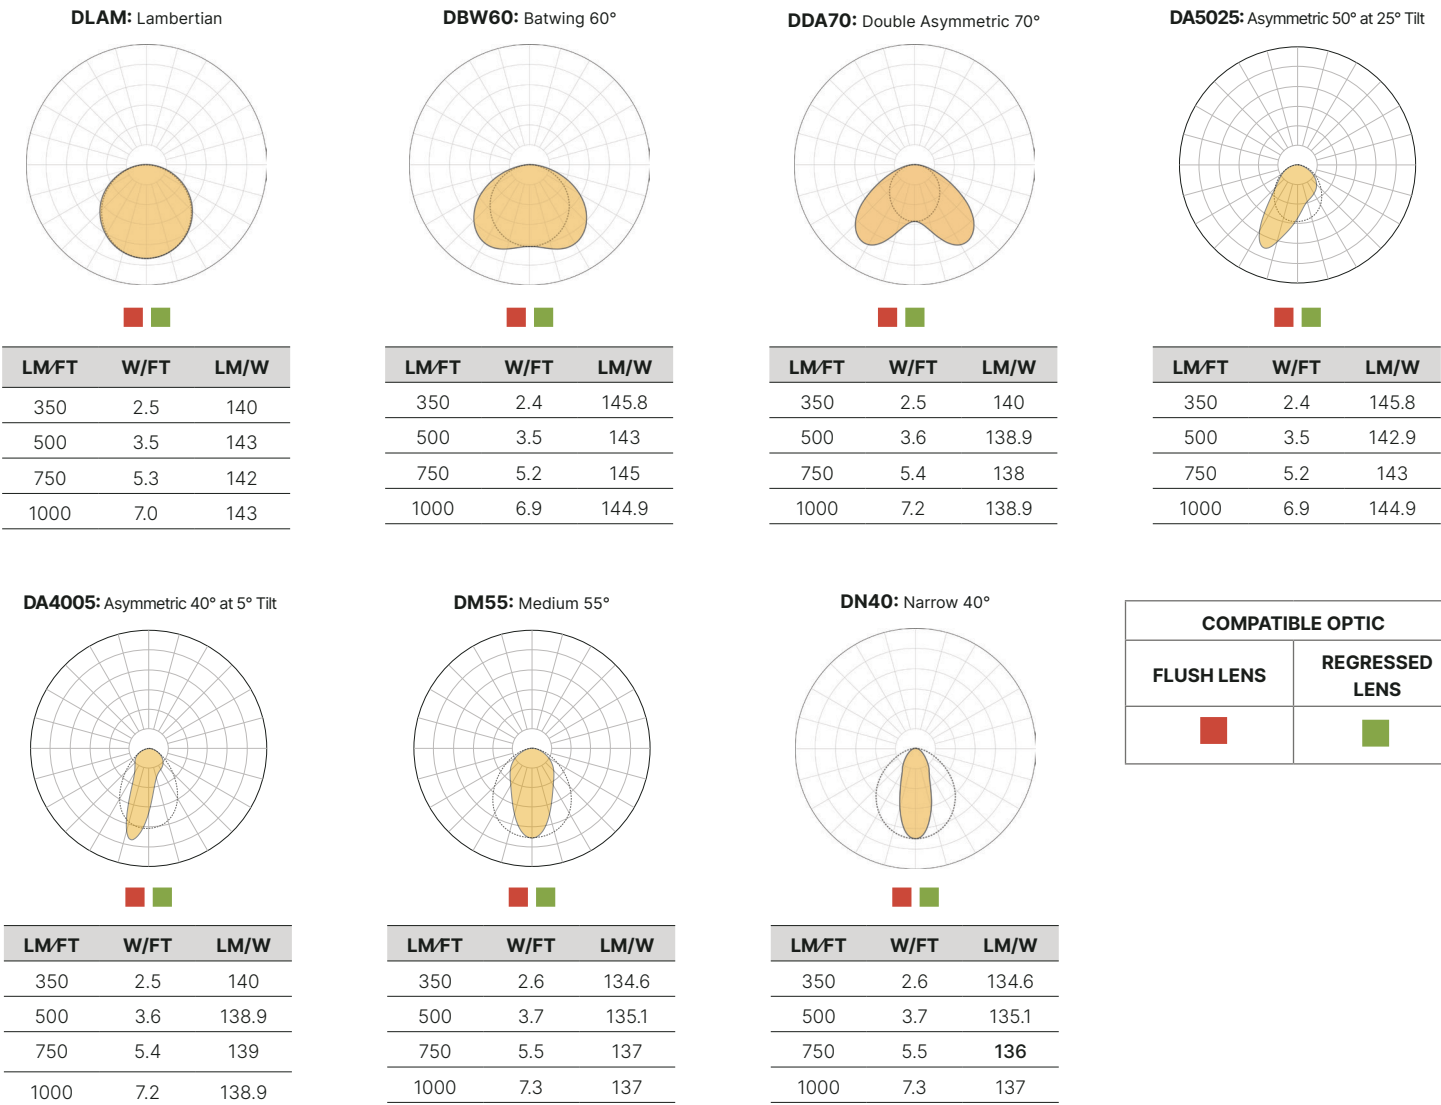
Static White Light



OPTICS CONFIGURATIONS

		
Flush Lens	Regressed Lens	Continuous Regressed Lens
White Flush Lens OFL	White Regressed Lens ORL	White Regressed Lens OCRL

LED OPTIONS

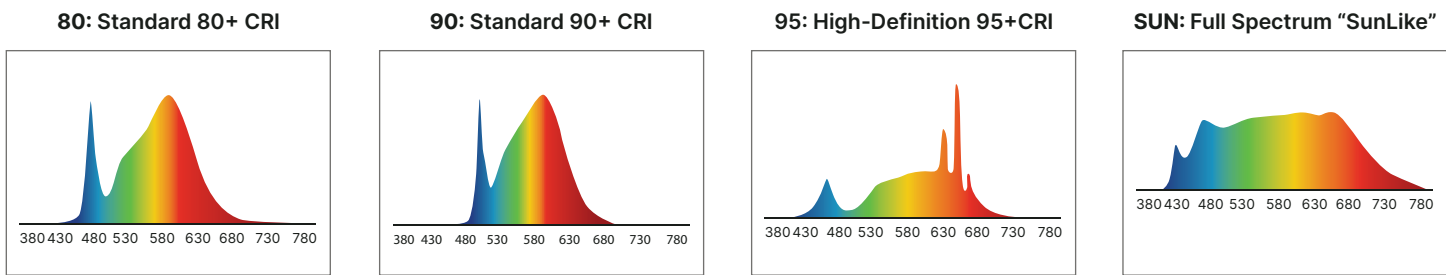

CODE	DESCRIPTION	TYPICAL LED DATA							
		CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	M/P Ratio	LPW
80	Standard 80 CRI	3500K	82.5	7.8	84	96.7	82.5	0.51	190
90	Standard 90 CRI	3500K	91	54.3	89.3	98.9	89.2	0.55	175
95	High Definition 95 CRI	3500K	97.1	95	–	–	–	0.70	163
SUN	Full Spectrum SunLike®	3500K	95	85	–	–	–	–	130

## POWER & CONTROLS

### Voltage

#### Fixture Voltage (AC)

120–277 VAC

347 VAC, 50/60 Hz

#### Power Location

Integral

#### LED Driver

Factory Selected, 36–39V Constant Current

### Drivers

**FDND** - Factory Non-Dimming

**FD00** - Factory 0–10V 0.1% Dim

**FD01** - Factory 0–10V 1% Dim

**FD10** - Factory 0–10V 10% Dim

**FDDA** - Factory DALI 0.1% Dim

**FDDX** - Factory DMX Dim

**FDTR** - Factory TRIAC Dim

**LD01** - Lutron Hi-Lume 1% Dim

**X\_** - Specify Driver

### Emergency Backup (Optional)

**EMC** - Emergency Circuit

**EMB** - Emergency Battery

(10 W — Remote)

**X\_** - Specify Backup

#### Power

10 W

#### Illumination Time

90 minutes

#### IP Rating

Suitable for Dry and Damp Locations,  
indoor use only

### XBox

#### Remote Driver Boxes (Optional)

To create a clean and organized power solution for multiple fixture installations see our Xbox Specification Guide. Reach out to a XICO Sales Representative to discuss your project's needs.

### Compatible Control Options





## TECHNICAL SPECIFICATIONS

### Finishes & Design Options

#### Housing Colors (Matte Finish)

White (RAL9003)  
Black (RAL9005)  
Gray (RAL7001)  
Custom RAL



#### Housing Material

6063-T5 extruded, recycled aluminum

#### Mounting Brackets

Sheet Metal

#### Flat End Cap Material

Machined or cast aluminum

#### Lens Options and Material

Flush, Regressed, and Continuous Regressed lens options with Patented SmartOptics® made from Acrylic (PMMA)

### Standards & Certifications

#### Sustainability

Low carbon, environmentally conscious packaging and shipping methods

#### Compliance

BABAA & TAA compliant in-house manufacturing in Boston, MA with North American supply chain



#### Certifications



#### Declare Listed and Red List Free

Low carbon, environmentally conscious packaging and shipping methods

#### Recyclable

SmartOptics and all powder coated and anodized parts are fully recyclable at end of life

#### Manufacturing

All XICO products and associated optics and LED engines are assembled at our factory in Woburn, MA

#### Quality Assurance

Each product is engineered reliability and quality assurance tested

### Declare.

Nano Series  
XICO Lighting  
Final Assembly: Woburn, MA, USA  
Life Expectancy (in Years):  
End of Life Options: Recyclable (99%)

**Ingredients:**  
Aluminum, Glass, oxide, chemicals, Poly(methyl methacrylate), Phenol, 4,4'-[1,1-bis(4-phenyl)ethane]- polymer with 2,2'-(5-methyl-1,3-dioxane)bis(4,4'-oxydiphenyl)bis(2,6-dimethyl-1,3-dioxane)carboxylic acid, 1,3-dimethyl ether, polymer with 1,4-dimethyl 1,4-bis(4-phenyl)ethane and 1,2-dimethyl, Polyethylene, Copper, Polyethylene Terephthalate, Barium sulfate, Neodymium, Silicon, Phosphoric acid, phosphoric acid, phenyl ester, iron, Siloxanes and Siloxanes, di-Me, Chromium, metallic, Gold, Manganese, Titanium, Zinc, Nickel (metallic)

### Declare Listed

At Xico Lighting, we are committed to transparency and sustainability. That's why all our products are Declare listed, providing clear insights into their environmental footprint and safety. Look for these internationally recognized labels on Xico products, packaging, or at [xicoled.com/declare](http://xicoled.com/declare).




### Red List Free


Xico Lighting is dedicated to creating safe, sustainable solutions. All our products are Red List Free, meeting the highest industry standards for healthy and environmentally responsible materials as defined by the International Living Future Institute (ILFI). Learn more at [xicoled.com/declare](http://xicoled.com/declare).

### Quick Links

#### 5-YR Warranty




#### Business Terms



#### Patents & Trademarks



#### SmartBeam



#### Revit Files

