
PROSquare3 Pendant



3" High-Performance Linear LED Pendant Mount



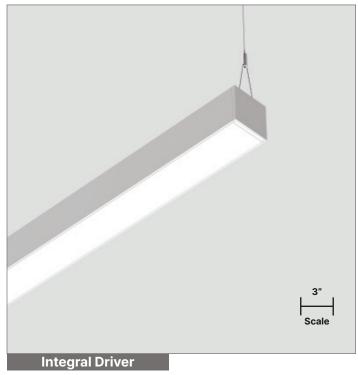

Features & Benefits

Exceptional Performance
Up to 1,500 lm/ft, 150 lm/W efficacy

Wide Range of LED Selections
Static, Tunable White, and Dim-to-Warm

Designed with Options

Wide choice of SmartOptic® lenses, beam distributions, 80/90/95+ CRI, 2200K to 5000K CCT, and 0-10V, DALI, DMX, and TRIAC dimming

Patented Innovations

Fusion® Optix Inside with unique SmartBeam® capabilities

Proprietary Optical Components

Provides excellent light distribution and high-transmission

Committed to Sustainability

Declare Listed and Red Free List materials

Compliance

UL Listed, Dry and Damp Locations

5-Year Warranty

Standard 5-year warranty, 50,000 hours

Designed & Built in **BOSTON**







FIXTURE ORDERING **Project Name Fixture Type** 1) FIXTURE DESIGN PRODUCT LENGTH **FINISH END CAP** OPTIC (DIRECT ONLY) PSQ3-P MWH Matte White (RAL9003) Flat End Cap OFL 3" High-Flush Lens 4' Performance MBK Matte Black (RAL9005) Linear LED 6 MGR Matte Gray (RAL7001) Clear Anodized Effect Pendant Mount CAE 10 X_ 10' RAL_ Specify RAL# Specify X', Y"

2) LED LIGHT ENGINE

CRI		ССТ		DIRECT B	EAM PATTERN	DIRE	СТ ОИТРИТ	INDIREC	T BEAM PATTERN	INDIF	RECT OUTPUT
S80	Std. 80 CRI	22	2200K	DLAM	Lambertian	35	350 lm/ft	NN	Not Needed	NN	Not Needed
S90	Std. 90 CRI	27	2700K	DBW60	Batwing 60°	50	500 lm/ft	ILAM	Lambertian	35	350 lm/ft
HE80	High-Eff. 80 CRI	30	3000K	DDA70	Double Asymmetric 70°	75	750 lm/ft	IBW120	Batwing 120°	50	500 lm/ft
HE90	High-Eff. 90 CRI	35	3500K	DA5025	Asymmetric 50°	100	1,000 lm/ft	IFT150	FlatTop 150°	75	750 lm/ft
HD95	High-Def. 95 CRI	40	4000K		at 25° Tilt	125	1,250 lm/ft	IA6040	Asymmetric 60°	100	1,000 lm/ft
SUN	Full SunLike	50	5000K	DA4005	Asymmetric 40°	150	1,500 lm/ft		at 40°Tilt	125	1,250 lm/ft
SBIOS	Static BIOS	3022D	3000K to		at 5° Tilt	X_	Specify Im/ft	IA4560	Asymmetric 45°	150	1,500 lm/ft
DBIOS	Dynamic BIOS		2200K	DM55	Medium 55°			X_	at 60°Tilt	X_	Specify
TBIOS	Tunable White		Dim-to-Warm	DN40	Narrow 40°				Specify Beam		lm/ft
	BIOS	3527D X_	3500K to 2700K Dim-to-Warm Specify CCT	X_	Specify Beam						

3) FIXTURE POWER & CONTROLS

LINE	LINE VOLTAGE (DC) INTEGRAL DRIVER (POWER)		EMERO	EMERGENCY BACKUP		CONTROL SYSTEM ¹		
UNV 347	120/277V 347V	FDND FD01 FD10 FDDA FDDX FDTR LD01 LD05 ED00 ED01 EDDA X_	Factory Non-Dimming Factory 0-10V 1% Dim Factory 0-10V 10% Dim Factory DALI 0.1% Dim Factory DMX Dim Factory TRIAC Dim Lutron Hi-Lume 1% Dim Lutron 5-Series 5% Dim eldoLED 0-10V 0.1% Dim eldoLED 0-10V 1% Dim eldoLED DALI 0.1% Dim Specify Driver	NN EMC EMB	Not Needed Emergency Circuit Emergency Battery (10 W — Onboard) Specify Backup	NN LUT COO CAS X_	Not Needed Lutron Cooper Casambi Specify Control System	


4) FIXTURE MOUNTING & CONNECTIONS

MOL	MOUNTING TYPE		CANOPY		POWER CORD		
DJ	Drywall/J-Box Mount	RCWH2	2" Round Canopy, White	S48WH	48" White Cable Kit		
T1	9/16" Flat T-Bar Mount	RCBK2	2" Round Canopy, Black	S48BK	48" Black Cable Kit		
T2	9/16" Bolt Slot T-Bar Mount	RCWH5	5" Round Canopy, White	S96WH	96" White Cable Kit		
Т3	15/16" Flat T-Bar Mount	RCBK5	5" Round Canopy, Black	S96BK	96" Black Cable Kit		
NO	TES						

Footnote: ¹ The control system and driver must be compatible.

FIXTURE DESIGN

Dimensions

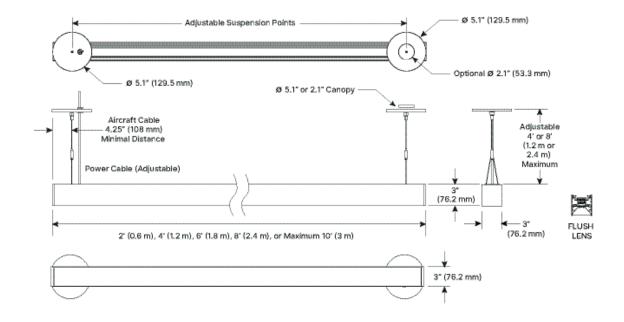



To download BIM (Revit) Files, please click or scan the QR Code.

Length

Length Options

 $2^{\prime},\,4^{\prime},\,6^{\prime},\,8^{\prime},\,10^{\prime}$ nominal, or custom within $3^{\prime\prime}$

Finish

Housing Colors (Matte Finish)



Gray (RAL7001)

Clear Anodized Effect



Custom RAL

Housing Material 6063-T5 extruded, recycled aluminum

Mounting Brackets Sheet metal

End Cap

End Cap Option Flat

End Cap Material Machined or cast aluminum

Optic

Lens Option Flush


Lens Material Patented SmartOptics® made from Acrylic (PMMA)

Voltage


Fixture Voltage (AC) 120–277 VAC and 347 VAC, 50/60 Hz

LED SELECTION GUIDE


S80: Standard 80+ CRI




S90: Standard 90+ CRI




HE80: High-Efficiency 80+ CRI




HE90: High-Efficiency 90+ CRI




HD95: High-Definition 95+ CRI




SUN: Full Spectrum "SunLike"



HCD: Human Centric Day



HCN: Human Centric Night



Static White Light (LED Light Engine Only)

					TYPICAL	LED DATA			
CODE	DESCRIPTION	ССТ	CRI	CRI R9	TM30 Rf	TM30 Rg	cqs	M/P Ratio	LPW
S80	Standard 80 CRI	3500K	82.5	7.8	84	96.7	82.5	0.51	190
S90	Standard 90 CRI	3500K	91	54.3	89.3	98.9	89.2	0.55	175
HE80	High Efficiency 80 CRI	3500K	82.1	5.9	83	94.2	81.2	0.52	210
HE90	High Efficiency 90 CRI	3500K	92.2	90	90.7	103.8	92.1	0.56	190
HD95	High Definition 95 CRI	3500K	97.1	95	_	_	-	0.70	163
SUN	Full Spectrum SunLike®	3500K	95	85	_	_	-	-	130
HCD	Human Centric Day	4000K	83	95	_	_	-	0.92	155
HCN	Human Centric Night	2700K	80	_	_	_	-	0.44	134

LPW Efficacy Conversion Chart

				CCT S	ELECTED			
CODE	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
S80	_	0.91	0.96	1.00	1.04	1.11	1.11	1.11
S90	-	0.91	0.96	1.00	1.04	1.11	1.11	1.11
HE80	_	0.96	0.99	1.00	1.03	1.04	1.03	1.03
HE90	_	0.91	0.96	1.00	1.04	1.11	N/A	N/A
HD95	_	0.91	0.96	1.00	1.04	1.11	1.03	1.04
SUN95	_	0.90	0.92	1.00	1.01	1.07	1.04	1.05
HCD	_	N/A	0.96	1.00	1.04	1.04	1.04	1.04
HCN	-	0.87	0.96	1.00	1.04	N/A	N/A	N/A

BIOS TECHNOLOGY

Choosing Your BIOS Solution




To learn more about BIOS Technology, please click or scan the QR Code.




BIOS is offered in four Circadian LED Solutions with BIOS SkyBlue Technology — Biological Static, Biological Dynamic, Biological Tunable, and Biological Dim-to-Warm. BIOS SkyBlue™ Technology includes a blue peak at 490nm that provides an effective daytime circadian signal using standard architectural color temperatures.


BIOS Static




BIOS Dynamic



BIOS Tunable



BIOS Dim-to-Warm



Daytime

No color change when dimmed

Spaces that operate during daytime hours — 7am and 7pm

Daytime & Evening 500K shift when dimmed

Spaces that operate overnight
— after 7pm and before 7am

Daytime & Evening

Dims to 2700K

Spaces that operate with overnight shifts — after 7pm and before 7am

Daytime & Evening

Dims from cool to warm

Spaces where people sleep — after 7pm and before 7am

Circadian and Human Centric Light

			BIO	-DIMMING MOD	ULE TECHNOL	LOGY GUIDE		
CODE	DESCRIPTION	Driver	Driver Voltage	сст	Requires BIO-Dimming Module	Lighting Control	BIOS SkyBlue (490nm)	
SBIOS	BIOS Static	DIM1	0-10V Dimming to 1% Dim-to-Dark	No CCT Change	No	Intensity Dimming Control Only	Always Present	
DBIOS	BIOS Dynamic		0-10V Intensity		Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming	
DBIOS-2	BIOS Dynamic (Two Channel)	BIODIM1	Dimming to 1% Dim-to-Dark	500K Shift	No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"	
TBIOS	BIOS Tunable		0-10V Control of Intensity & CCT on Separate 2 Channels / DALI Control of Intensity & CCT on Separate 2 Channels	Intensity & CCT on Separate ATW / 2 Channels / DTW DALI Control of Intensity & CCT on Separate		Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming
TBIOS-2	BIOS Tunable (Two Channel)				Dims to 2700K	No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"
DWBIOS	BIOS Dim-to-Warm			Dims to 2200K	Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming	
DWBIOS-2	BIOS Dim-to-Warm (Two Channel)	_	-		No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"	

SMARTBEAM® TECHNOLOGY

The Ultimate Control of Lighting Distributions

SmartBeam makes it easy to specify the exact light required for any architectural space. Available in every XICO product; it is now possible to create truly tailored and engaging lighting that transform spaces, improves visual comfort, and saves energy.

To learn more about our SmartBeam Technology please click or scan the QR Code.



FIXTURE POWER & CONTROLS

Voltage

LED Driver Factory Selected, 36-39V Constant Current

Emergency Backup

Backup Types Emergency Circuit, Emergency Battery (Onboard), and other emergency backups are available

Wiring Typically the Emergency Backup is wired to 48" sections

Power 10 W

Illumination Time 90 minutes

Partners









Control Systems

Integral Drivers

Other


Lutron

Factory Non-Dimming, Factory 0-10V 1% Dim, Factory 0-10V 10% Dim, Factory DALI 0.1% Dim, Factory DMX Dim, Factory TRIAC Dim, eldoLED 0-10V 0.1% Dim, eldoLED 0-10V 1% Dim, eldoLED DALI 0.1% Dim, and other drivers are available, consult factory (not all integral)


Hi-Lume 1% Dimming and 5-Series 5% Dimming

Cooper Compatible driver

Casambi (wireless) Compatible driver



Drivers are integral to the fixture and are included. They provide 0-10V, DALI, DMX, and TRIAC dimming. Also compatible with Cooper and other common building control systems, including PoE and wireless.

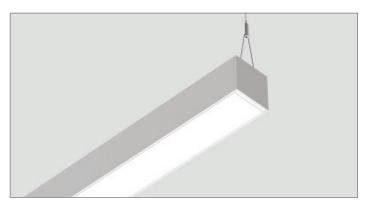

Flush Lens

FIXTURE MOUNTING & CONNECTIONS

Mounting Type

T-Bar Mount Installs into a ceiling grid system and mount on to typical T-Bar elements. Available with a range

of accessories, mounts and inserts that provide easy customization of visual appearance and

performance enhancements.

Drywall/J-Box Mount Installs onto a surface via a junction box. Available with a range of accessories, mounts and inserts

that provide easy customization of visual appearance and performance enhancements.

Canopy

Canopy Sizes & Shapes 2" and 5", Round

Canopy Colors



White (RAL9003) Black (RAL9005)

Canopy Material Powder Coated Steel


Power Cords

48" Cable Kit White and Black
96" Cable Kit White and Black

Mounting Options

Typically suspended at a distance of between 24" and 72". Supplied hardware includes:


- Cable length adjustable at fixture level
- Standard 96" cord length or custom length
- Internal brackets to eliminate light leakage at joints

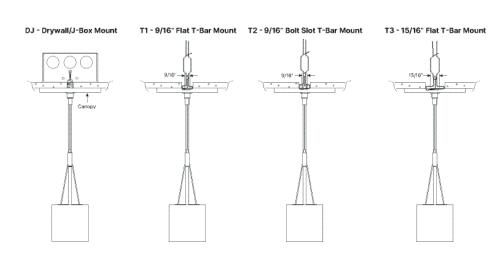

Standard Lengths & Continuous Runs

Maximum length of one fixture is 10'. Longer runs can be produced by joining sections. Customer approval of shop drawings is required prior to build of any non-standard length order.

Lens can be supplied in a maximum 250' roll length with Continuous FlatLENS Optics to be installed on-site for a seamless light surface.

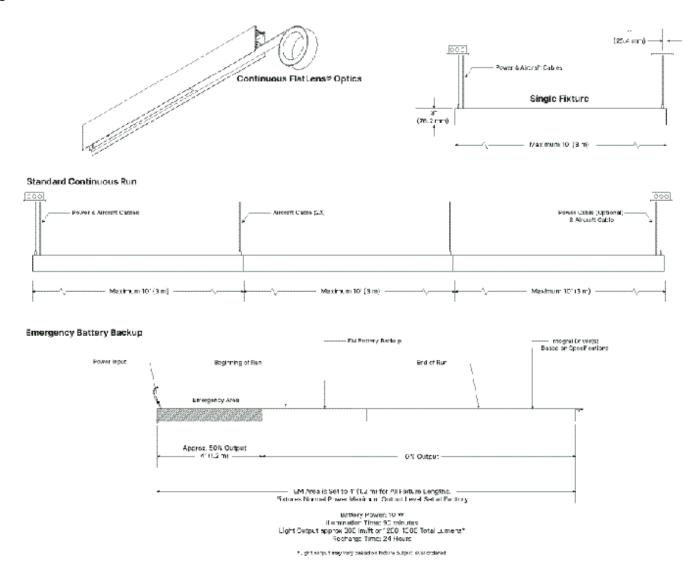

STANDARDS & CERTIFICATIONS



Declare Listed

Declare labels provide a quick and reliable way to make choices about the environmental footprint and safety of the product. Declare is internationally recognized and the labels can be found on the product, product packaging, or company website. Visit xicoled.com for Declare Listed details.



Red List Free

An industry standard certification for LED lighting products based on the International Living Future Institute (ILFI). These products only use materials based on the "Red List of Toxic Chemicals" (a list of chemicals and materials known to be hazardous to people and/or the Earth) that are safe, healthy, and environmentally sustainable.

Certifications

Compliance BAA & TAA compliant in-house manufacturing in Boston, MA with North American supply chain

Certifications

Sustainability







Declare Listed and Red List Free

Packaging Low carbon, environmentally conscious packaging and shipping methods

Environmental Suitability

IP Rating Suitable for Dry and Damp Locations, indoor use only

Recyclable SmartOptics and all powder coated and anodized parts are fully recyclable at end of life

Reliability

Manufacturing All XICO products and associated optics and LED engines are assembled at our factory in

Woburn, MA

Quality Assurance Each product is engineered reliability and quality assurance tested

Warranty & Terms

5-YR Warranty








For details on our warranty and business terms, please click or scan the QR Code.

	BEAM PATTERN						
OPTIC	DLAM	DBW60	DDA70	DA5025	DA4005	DM55	DN40
Flush Lens	•	•	•	•	•	•	•

DIRECT PHOTOMETRICS


Static White Light


DLAM: Lambertian




	77.	-1"		
			H	7
X	7			

DBW60: Batwing 60°







Length	48"
LED	HE90
CRI/CCT	90+/3500K
Lumens	3,000
lm/ft	750
Watts	21
W/ft	5.28
LPW	142

Length	48"
LED	HE90
CRI/CCT	90+/3500k
Lumens	3,000
lm/ft	750
Watts	21
W/ft	5.17
LPW	145

 Length
 48"

 LED
 HE90

 CRI/CCT
 90+/3500K

 Lumens
 3,000

 Im/ft
 750

 Watts
 22

 W/ft
 5.43

 LPW
 138

Length 48" LED HE90 CRI/CCT 90+/3500K Lumens 3,000 lm/ft 750 Watts 21 W/ft 5.24 LPW 143

 Length
 48"

 LED
 HE90

 CRI/CCT
 90+/3500K

 Lumens
 3,000


 Im/ft
 750


 Watts
 22

 W/ft
 5.39


 LPW
 139

DM55: Medium55°





137




Length	48"
LED	HE90
CRI/CCT	90+/3500K
Lumens	3,000
lm/ft	750
Watts	22
W/ft	5.51
I DW	136

LPW


INDIRECT PHOTOMETRICS

ILAM: Lambertian




Length	48"
LED	HE90
CRI/CCT	90+/3500K
Lumens	4,000
lm/ft	1,000
Watts	19
W/ft	6.45
LPW	155

IBW120: Batwing 120°




Length	48"
LED	HE90
CRI/CCT	90+/3500K
•	
Lumens	4,000
lm/ft	1,000
Watts	25
W/ft	6.37
LPW	157

IFT150: FlatTop 150°




Length	48"
LED	HE90
CRI/CCT	90+/3500K
Lumens	4,000
lm/ft	1,000
Watts	27
W/ft	6.67
I DW	150



Length	48"
LED	HE90
CRI/CCT	90+/3500K
Lumens	4,000
lm/ft	1,000
Watts	27
W/ft	6.71
IPW	149

Static White Light



Length	48"
LED	HE90
CRI/CCT	90+/3500K
Lumens	4,000
lm/ft	1,000
Watts	26
W/ft	6.58
I PW	152

PATENTS & TRADEMARKS



To learn more about our unique technologies, please click or scan the QR Code.

Utility Patents

US11543582, US11520097, US11512466, US11441749, US11396751, US11333822, US11163104,

US11156762, US10852466, US10068447, US8953926, US8948564, US8911099, US8876348, US8794812, US8783898, US8761565, US8750671, US8721152, US8619363, US8430548, US8408775, US8249408, US8231256, US8177408, US8033706, US8033674, US7991257, US7914192, US7784954, US7758227, US7722224, US7542635, US7453636, US7453635, US7431489, US7408707, US7278775, US6369944, US6346311, US6123877, US5932342, US5837346, US20220373144, US20220372752, US20220364708, US20220357006, US20220357005, US20220342141, US20220290432, US20220206210A1, US20220171119A1,

US20220171115A1, US20220162856A1, US20220162853A1, US20220146063A1, US20220137287, US20210301991A1, US20200355345A1, US20200217071A1, US20220333765A1, US20220228366A1, US20220196906A1, US20220010554A1, US20080043490A1, US20060290253A1, US20060215958A1,

US20120321247, US20120250330, US20120099204

Canada CA2702600, CA2702685, CA2702690

 France
 FREP0800658

 Germany
 DEEP0800658

Great Britain GB2492541, GB2492542, GBEP0800658, GB2492398

 Japan
 JP03958359

 Netherlands
 NLEP0800658

 Taiwan
 FTW360813B

European Patent Organization

EP0843203, EP0843203

Design Patents

United States USD719282, USD717973, USD669606, USD669608, USD669609, USD669614, USD663056

The Patent Corporation Treaty

World Intellectual Property Organization WO2015200268

Trademarks

United States US6672871, US6397231, US6373493, US6257728, US6190558, US6190559, US6142905, US6114408,

US6038234, US6025279, US6060740, US6257729, US5856164, US5734112, US5543304, US5309290,

US5309315, US4691124, US4640751

