


GRIDBar1

Direct | Standard Lengths


Project Name _____

Fixture Type _____

XICO®

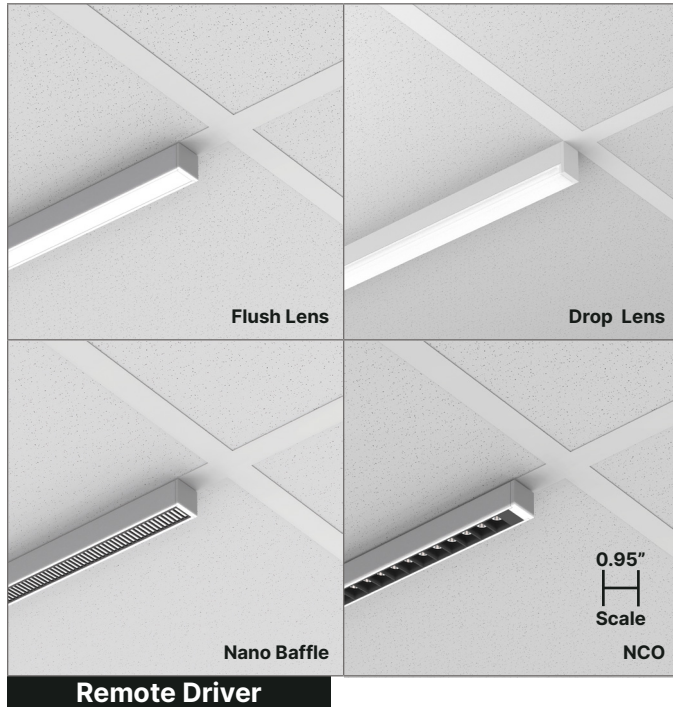

LIGHTING CONFIGURATIONS

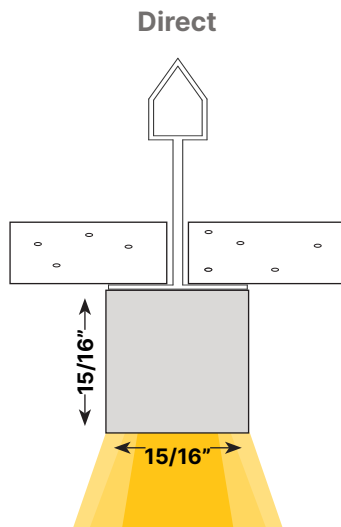

DESCRIPTION

TBar Replacement LED Light Fixture

GRIDBar1 is a unique and patented linear lighting solution design to directly replace TBar elements in suspended grid ceilings. GRIDBar1 is the only lighting product that replaces a T-Bar whilst allowing positioning anywhere in the grid ceiling. GRIDBar1 is designed to be exactly 15/16" wide, thereby matching the typical width of a TBar element. GRIDBar1 can also be used to directly replace both flat and bolt-slot style 9/16" TBar elements. GRIDBar1 brings SmartBeam® capabilities in an easy to install form factor that complements architectural space. GRIDBar1 features a remote driver and "power over cable" technology to remove visual bulk.

FEATURES & BENEFITS

Exceptional Performance

Replaces TBar. Up to 1,000 lm/ft, 135 lm/W efficacy

Wide Range of LED Selections

Static, Tunable White, and Dim-to-Warm

Designed with Options

Wide choice of SmartOptic® lenses, beam distributions, 80/90/95+ CRI, 2700K to 6500K CCT, and 0-10V, DALI, DMX, and TRIAC dimming

Patented Innovations

Fusion® Optix Inside with unique SmartBeam® capabilities

Proprietary Optical Components

Provides excellent light distribution and high-transmission

Committed to Sustainability

Declare Listed and Red Free List materials

Compliance

UL Listed, Dry and Damp Locations

5-Year Warranty

Standard 5-year warranty, 50,000 hours

Declare



bios



Designed & Built in
BOSTON

FIXTURE ORDERING

Project Name _____

Fixture Type _____

1) FIXTURE DESIGN

PRODUCT	FIXTURE LENGTH	FINISH	END CAP STYLE
GBA1-TBR 1" Compact Linear LED T-Bar Replacement	2 - 2 ft 4 - 4 ft 6 - 6 ft 8 - 8 ft X_ - Specify Ft', In"	Powder Coated PMW - Matte White PMB - Matte Black PMG - Matte Gray PRAL_ - Specify RAL #	E1 - Flat End Cap
	Custom fixtures are available in 3" increments beyond standard lengths.	Anodized ACL - Clear Anodized ACU_ - Custom Anodized #	

2) LED LIGHT ENGINE

CRI	CCT	OPTIC (DIRECT ONLY)	DIRECT BEAM PATTERN	DIRECT OUTPUT
80 - Std. 90 CRI 90 - Std. 90 CRI 95 - High-Def. 95 CRI SUN - Full SunLike	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K XD - Dim-to-Warm ¹ XT - Tunable ¹ X_ - Specify CCT Specify Dim-to-Warm and Tunable between 2700K-6500K.	OFL - Flush Lens ONBW - Nano Baffle, White ONBB - Nano Baffle, Black	DLAM - Lambertian DBW60 - Batwing 60° DDA70 - Double Asym 70° DA5025 - Asym 50° at 25° Tilt DA4005 - Asym 40° at 5° Tilt DM55 - Medium 55° DN40 - Narrow 40° X_ - Specify Beam ¹	35 - 350 lm/ft 50 - 500 lm/ft 75 - 750 lm/ft 100 - 1,000 lm/ft X_ - Specify lm/ft
		OSDL05 - Square Drop Lens 1/2"	DLAM - Lambertian	
		OSNCOW - Square NCO, White OSNCOB - Square NCO, Black ORNCOW - Round NCO, White ORNCOB - Round NCO, Black ORNCOG - Round NCO, Graphite	DS45 - Nano Cavity Optics Spot 45° DS35 - Nano Cavity Optics Spot 35° DS25 - Nano Cavity Optics Spot 25°	

3) FIXTURE POWER & CONTROLS

LINE VOLTAGE (DC)	REMOTE DRIVER (POWER) ²	
UNV - 120/277V 347 - 347V	FDND - Factory Non-Dimming FD00 - Factory 0-10V 0.1% Dim FD01 - Factory 0-10V 1% Dim FD10 - Factory 0-10V 10% Dim FDDA - Factory DALI 0.1% Dim FDDX - Factory DMX Dim FDTR - Factory TRIAC Dim LD01 - Lutron Hi-Lume 1% Dim X_ - Specify Driver	Footnotes: ¹ Contact factory about custom beam options. ² Standard driver box is included


4) FIXTURE MOUNTING & CONNECTIONS

MOUNTING TYPE
Lay-In (Drop-In) Ceiling Tile TC1 - 9/16" Flat T-Bar + Lay-In Tile Mount TC2 - 9/16" Bolt Slot T-Bar + Lay-In Tile Mount TC3 - 15/16" Flat T-Bar + Lay-In Tile Mount Tegular Ceiling Tile TC4 - 9/16" Flat T-Bar + Tegular Tile Mount TC5 - 9/16" Bolt Slot T-Bar + Tegular Tile Mount TC6 - 15/16" Flat T-Bar + Tegular Tile Mount


OPTIONAL	
EMERGENCY BACKUP	WIRELESS MODULE
EMC - Emergency Circuit EMB - Emergency Battery (10 W — Remote) X_ - Specify Backup Specify requirements at time of order.	WCN - Wireless Communication Node (Connected to LED Driver In-Fixture or In-Driver Box) PIR - Wireless Communication Node + PIR Sensor (Standard Lens for Low Bay < 10') MW - Wireless Communication Node + MW Sensor (Standard for Low Bay < 10') X_ - Other – Specify Embedded Component or Specific Non-Standard Sensor Detection Range

DIMENSIONS & INSTALLATION

Dimensions

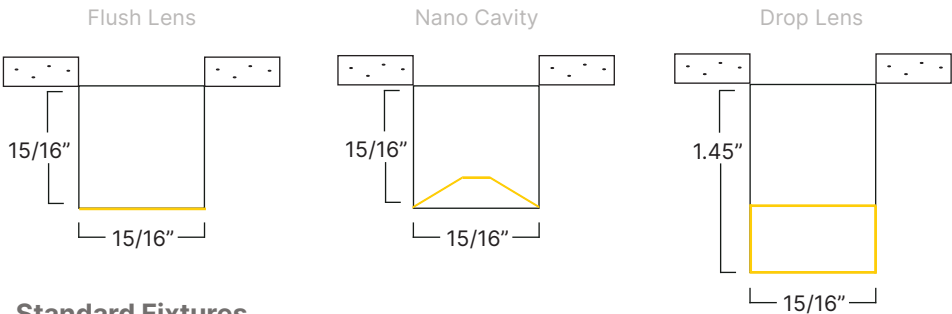

Standard Fixtures

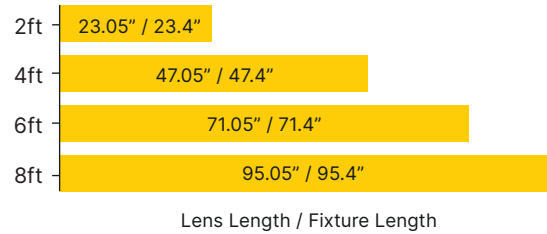

Mounting Type

T-Bar Replacement


Replaces TBar crossmember in ceiling grid system. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements.

Mounting Kit

Surface Mounting Bracket

Stainless Steel

Mounting Options


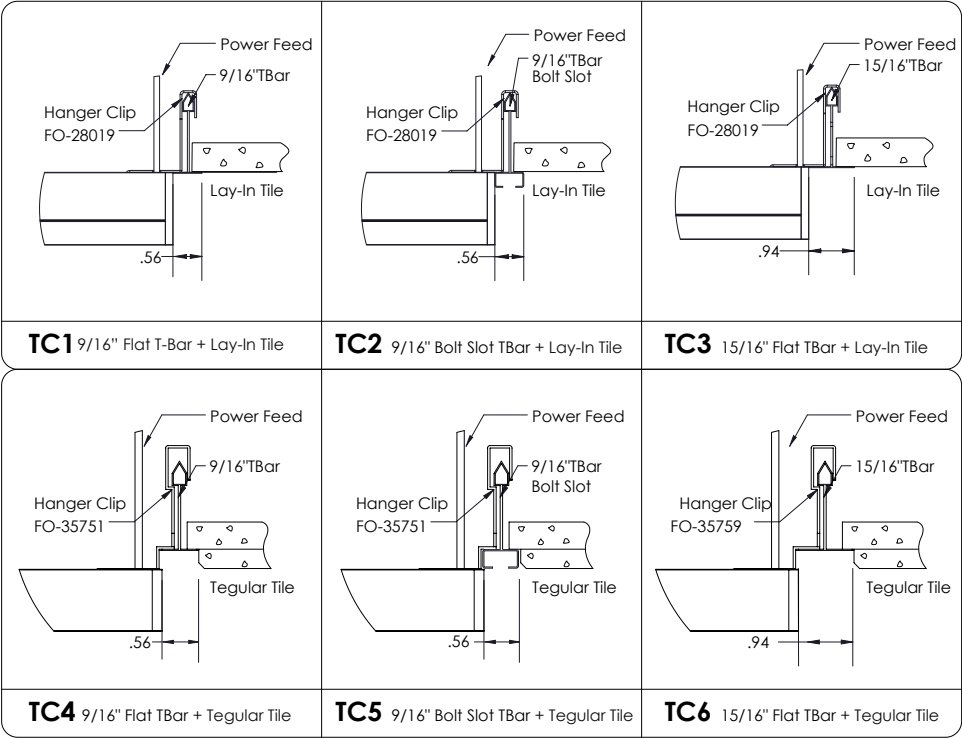


DIMENSIONS & INSTALLATION

Surface Mount Bracket




TC Clip

Mounting Clips fasten to perpendicular TBar (Main Beam) providing a secure connection to the grid structure. Each clip is designed to mount the GRIDBar1 fixture flush to the tile surface. Chose your clip based on the Tbar size and desired ceiling tile.

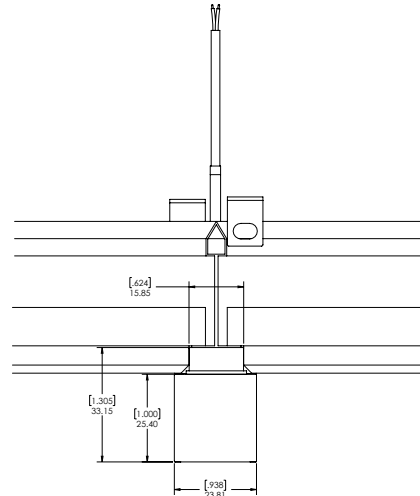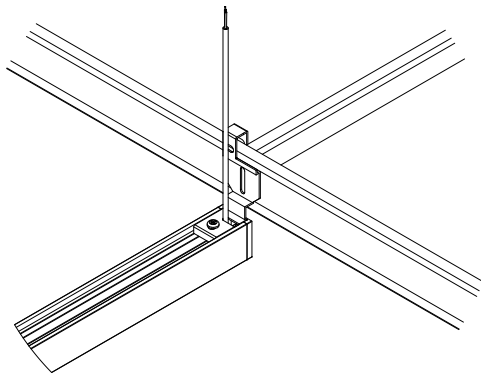

GRIDBar Fin

A mid-suspension point creates an anchor point for adjoining TBar(s). A thru-hole allows for suspension points for a variety of secondary suspension options including aircraft cable, hanger wire, hook, chains, etc.

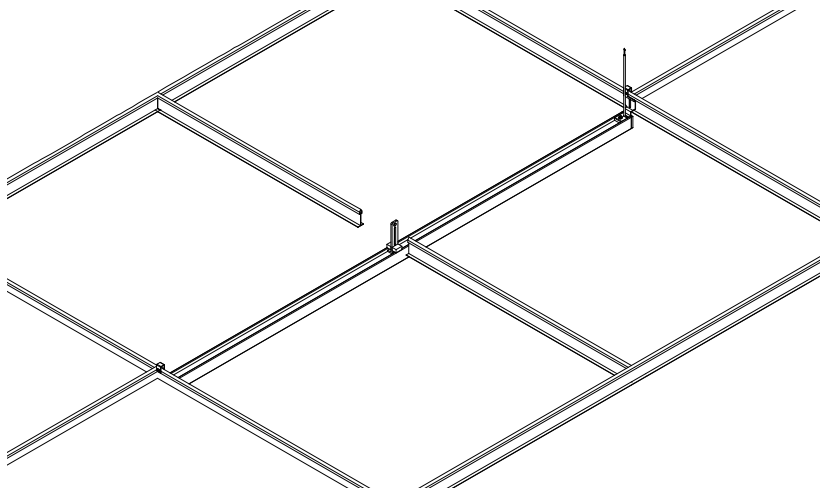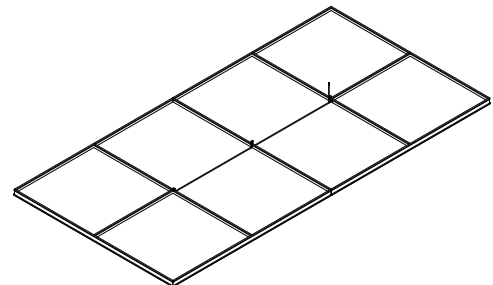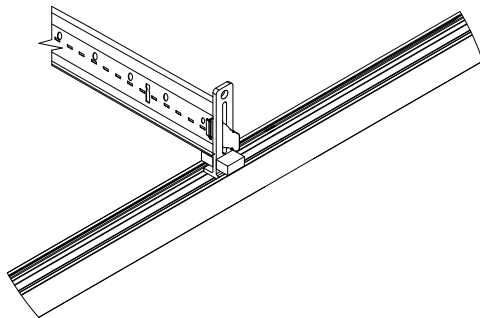

SMARTBEAM® TECHNOLOGY


The Ultimate Control of Lighting Distributions

SmartBeam makes it easy to specify the exact light required for any architectural space. Available in every XICO product; it is now possible to create truly tailored and engaging lighting that transform spaces, improves visual comfort, and saves energy.


To learn more about our SmartBeam Technology, please click or scan the QR Code.




Direct Optics Choices




FL - Flush Lens



NB - Nano Baffle



SDL - Square Drop Lens 1/2"



NCO - Nano Cavity Optics

DIRECT OPTICS	BEAM PATTERN									
	DLAM	DBW60	DDA70	DA5025	DA4005	DM55	DN40	DS45	DS35	DS25
Flush Lens	■	■	■	■	■	■	■			
Nano Baffle	■	■	■	■	■	■	■			
Drop Lens 1/2"	■									
NCO								■	■	■

LPW Efficacy Conversion Chart

CODE	CCT SELECTED							
	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
80	–	0.91	0.96	1.00	1.04	1.11	1.11	1.11
90	–	0.91	0.96	1.00	1.04	1.11	1.11	1.11
95	–	0.91	0.96	1.00	1.04	1.11	1.03	1.04
SUN	–	0.90	0.92	1.00	1.01	1.07	1.04	1.05

LPW Performance

	DIRECT									
	DLAM	DBW60	DDA70	DA5025	DA4005	DM55	DN40	DS45	DS35	DS25
LM/W	111	123	123	130	128	129	116	82	82	82


$$\text{LM/W} = \frac{\left(\begin{array}{c} \text{DIRECT} \\ \text{LM/FT} \end{array} + \begin{array}{c} \text{INDIRECT} \\ \text{LM/FT} \end{array} \right)}{\left(\begin{array}{c} \text{DIRECT} \\ \text{W/FT} \end{array} + \begin{array}{c} \text{INDIRECT} \\ \text{W/FT} \end{array} \right)}$$

DIRECT PHOTOMETRICS

48" Length, 80+/3500K CRI/CCT, 3,000 Lumens


Static White Light

DLAM: Lambertian




LM/FT	W/FT	LM/W
350	3.2	109.4
500	4.6	108.7
750	6.9	108.7
1000	9.2	108.7

DLAM: Lambertian w/ 1/2" Drop Lens




LM/FT	W/FT	LM/W
350	2.5	140
500	3.5	142.9
750	5.3	142.7
1000	7.1	140.8

DBW60: Batwing 60°




LM/FT	W/FT	LM/W
350	2.8	123
500	4	125
750	6	125
1000	8	125

DDA70: Double Asymmetric 70°




LM/FT	W/FT	LM/W
350	2.8	125
500	4.1	122
750	6.1	123
1000	8.1	123.5

DA5025: Asymmetric 50° at 25° Tilt




LM/FT	W/FT	LM/W
350	2.8	123
500	4	125
750	6	125
1000	8	125

DA4005: Asymmetric 40° at 5° Tilt




LM/FT	W/FT	LM/W
350	2.8	125
500	3.9	128.2
750	5.9	127.1
1000	7.9	126.6

DM55: Medium 55°




LM/FT	W/FT	LM/W
350	2.8	125
500	3.9	128.2
750	5.9	127.1
1000	7.9	126.6

DN40: Narrow 40°

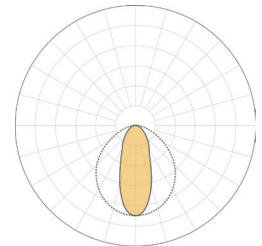


LM/FT	W/FT	LM/W
350	2.8	123
500	4	125
750	6	125
1000	8	125

DS45: Nano Cavity Optic Spot 45°




LM/FT	W/FT	LM/W
350	4.2	83.3
500	6	83.3
750	9	83.3
1000	12	83.3

DS35: Nano Cavity Optic Spot 35°



LM/FT	W/FT	LM/W
350	4.2	83.3
500	6	83.3
750	9	83.3
1000	12	83.3

DS25: Nano Cavity Optic Spot 25°



LM/FT	W/FT	LM/W
350	4.2	83.3
500	6	83.3
750	9	83.3
1000	12	83.3

COMPATIBLE OPTIC

FLUSH LENS



NANO BAFFLE



DROP LENS



NCO



OPTICS CONFIGURATIONS

				
Flush Lens	Square Drop Lens	Nano Baffle	Square NCO	Round NCO
White Flush Lens OFL	White Square Drop Lens OSDL05	White Nano Baffle ONBW	White Square NCO OSNCOW	White Round NCO ORNCOW
		Black Nano Baffle ONBB	Black Square NCO OSNCOB	Black Round NCO ORNCOB
				Graphite Round NCO ORNCOG

POWER & CONTROLS

Voltage

Fixture Voltage (AC)

120–277 VAC

347 VAC, 50/60 Hz

Power Location

Remote

LED Driver

Factory Selected, 36–39V Constant Current

Drivers

FDND - Factory Non-Dimming

FD00 - Factory 0–10V 0.1% Dim

FD01 - Factory 0–10V 1% Dim

FD10 - Factory 0–10V 10% Dim

FDDA - Factory DALI 0.1% Dim

FDDX - Factory DMX Dim

FDTR - Factory TRIAC Dim

LD01 - Lutron Hi-Lume 1% Dim

X_ - Specify Driver

Emergency Backup (Optional)

EMC - Emergency Circuit

EMB - Emergency Battery

(10 W — Remote)

X_ - Specify Backup

Power

10 W

Illumination Time

90 minutes

IP Rating

Suitable for Dry and Damp Locations,
indoor use only

XBox

Remote Driver Boxes (Optional)

To create a clean and organized power solution for multiple fixture installations see our XBox Specification Guide. Reach out to a XICO Sales Representative to discuss your project's needs.

Compatible Control Options



TECHNICAL SPECIFICATIONS

Finishes & Design Options

Housing Colors (Matte Finish)

White (RAL9003)
Black (RAL9005)
Gray (RAL7001)
Custom RAL



Housing Material

6063-T5 extruded, recycled aluminum

Mounting Brackets

Sheet Metal

Flat End Cap Material

Machined or cast aluminum

Lens Options and Material

Flush, Nano Baffle, Square Drop 1/2", Square and Round Nano Cavity Optics (NCO) lens options with Patented SmartOptics® made from Acrylic (PMMA)

Standards & Certifications

Sustainability

Low carbon, environmentally conscious packaging and shipping methods

Compliance

BABAA & TAA compliant in-house manufacturing in Boston, MA with North American supply chain



Certifications



Declare Listed and Red List Free

Low carbon, environmentally conscious packaging and shipping methods

Recyclable

SmartOptics and all powder coated and anodized parts are fully recyclable at end of life

Manufacturing

All XICO products and associated optics and LED engines are assembled at our factory in Woburn, MA

Quality Assurance

Each product is engineered reliability and quality assurance tested

Declare.

Nano Series

XICO Lighting

Final Assembly: Woburn, MA, USA
Life Expectancy: 10+ Years
End of Life Options: Recyclable (99%)

Ingredients:

Aluminum, Glass, oxide, chemicals, Polymethyl methacrylate, Phenol, 4,4'-O-methylhydroquinone, polymer with 2,2'-(3,3'-methylthiobis(4,4'-oxydiphenyleneoxy)bis(phenylene)), 1,3-benzenedicarboxylic acid, 1,3-dimethyl imide, polymer with 1,4-dimethyl 1,4-benzenedicarboxylic acid and 1,2-ethanediol, Polyethylene Glycol, Polyethylene Terephthalate, Barium sulfate, Hexamethylenesiloxane, Phosphoric acid, phosphoric acid, diphenyl ether, iron, titanium and silicones, di-ethyl-chromium, metallic, gold, tungsten, titanium, zinc, nickel, plastic.

Declare Listed

At Xico Lighting, we are committed to transparency and sustainability. That's why all our products are Declare listed, providing clear insights into their environmental footprint and safety. Look for these internationally recognized labels on Xico products, packaging, or at xicoled.com/declare.




Red List Free

Xico Lighting is dedicated to creating safe, sustainable solutions. All our products are Red List Free, meeting the highest industry standards for healthy and environmentally responsible materials as defined by the International Living Future Institute (ILFI). Learn more at xicoled.com/declare.

Quick Links

5-YR Warranty



Business Terms



Patents & Trademarks



SmartBeam



Revit Files

