


GRIDSlot2

Direct | Standard Lengths

Project Name _____

Fixture Type _____

XICO®

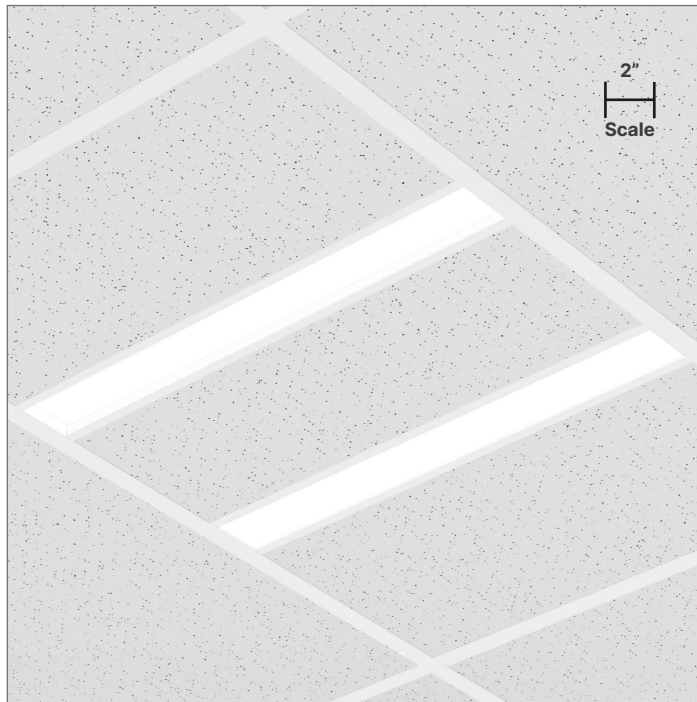

Fixture Mounted or Remote Driver

DESCRIPTION

2" Edge-Lit Linear LED T-Bar Mount

GRIDSlot2 T-Bar is an innovative low-profile 2" wide LED luminaire designed to be used in T-Bar ceiling installs and especially suited to low or zero plenum. GRIDSlot2 T-Bar provides best-in-class efficiency and beam control options. GRIDSlot2 T-Bar incorporates an engineered LED light engine with fully customizable choices for lumen output, CCT and CRI.

FEATURES & BENEFITS

Exceptional Performance

Up to 1,000 lm/ft, 135 lm/W efficacy

Wide Range of LED Selections

Static, Tunable White, and Dim-to-Warm

Designed with Options

Wide choice of SmartOptic® lenses, beam distributions, 80/90/95+ CRI, 2700K to 6500K CCT, and 0-10V, DALI, DMX, and TRIAC dimming

Patented Innovations

Fusion® Optix Inside with unique SmartBeam® capabilities

Proprietary Optical Components

Provides excellent light distribution and high-transmission

Committed to Sustainability

Declare Listed and Red Free List materials

Compliance


UL Listed, Dry and Damp Locations

5-Year Warranty

Standard 5-year warranty, 50,000 hours

LIGHTING CONFIGURATIONS

Direct



Declare



bios



Designed & Built in
BOSTON

FIXTURE ORDERING

Project Name _____

Fixture Type _____

1) FIXTURE DESIGN

PRODUCT	FIXTURE LENGTH	FINISH
GSL2-R 2" Edge-Lit Linear LED T-Bar Mount	2 - 2 ft 4 - 4 ft 6 - 6 ft 8 - 8 ft X_ - Specify Ft', In" Custom fixtures are available in 3" increments beyond standard lengths.	Powder Coated PMW - Matte White PMB - Matte Black PMG - Matte Gray PRAL_ - Specify RAL # Anodized ACL - Clear Anodized ACU_ - Custom Anodized #

2) LED LIGHT ENGINE

CRI	CCT	OPTIC (DIRECT ONLY)	DIRECT BEAM PATTERN	DIRECT OUTPUT
80 - Std. 80 CRI 90 - Std. 90 CRI 95 - High-Def. 95 CRI SUN - Full SunLike	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K XD - Dim-to-Warm XT - Tunable X_ - Specify CCT Specify Dim-to-Warm and Tunable between 2700K-6500K.	OFL - Flush Lens ORL - Regressed Lens OCRL - Continuous Regressed Lens ¹	DLAM - Lambertian DBW60 - Batwing 60° D5025 - Asym 50°at 25° Tilt X_ - Specify Beam ²	35 - 350 lm/ft 50 - 500 lm/ft 75 - 750 lm/ft 100 - 1,000 lm/ft X_ - Specify lm/ft

3) FIXTURE POWER & CONTROLS

LINE VOLTAGE (DC)	DRIVER LOCATION	DRIVER (POWER) ³	
UNV - 120/277V 347 - 347V	FMD - Fixture Mounted Driver RD - Remote Driver	FDND - Factory Non-Dimming FD00 - Factory 0-10V 0.1% Dim FD01 - Factory 0-10V 1% Dim FD10 - Factory 0-10V 10% Dim FDDA - Factory DALI 0.1% Dim FDDX - Factory DMX Dim FDTR - Factory TRIAC Dim LD01 - Lutron Hi-Lume 1% Dim X_ - Specify Driver	Footnotes: ¹ Continuous Regressed Lens ships on a roll for seamless lens installation. ² Contact factory about custom beam options. ³ Standard driver box is included.

4) FIXTURE MOUNTING

T-BAR FLANGE TYPE


TC1 - 9/16" Flat T-Bar Type
TC2 - 9/16" Bolt & Slot T-Bar Type
TC3 - 15/16" Flat T-Bar Type
X_ - Specify Mounting Type

OPTIONAL	
EMERGENCY BACKUP	WIRELESS MODULE
EMC - Emergency Circuit EMB - Emergency Battery (10 W — Remote) X_ - Specify Backup Specify requirements at time of order.	WCN - Wireless Communication Node (Connected to LED Driver In-Fixture or In-Driver Box) PIR - Wireless Communication Node + PIR Sensor (Standard Lens for Low Bay < 10') MW - Wireless Communication Node + MW Sensor (Standard for Low Bay < 10') X_ - Other – Specify Embedded Component or Specific Non-Standard Sensor Detection Range


DIMENSIONS & INSTALLATION

Dimensions

Flush Lens

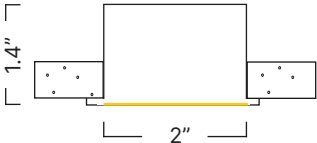

Regressed Lens

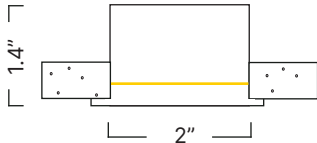

Standard Fixtures

2ft	23.05" / 23.4"
4ft	47.05" / 47.4"
6ft	71.05" / 71.4"
8ft	95.05" / 95.4"

Lens Length / Fixture Length



Mounting Type

T-Bar Mount


Specifically designed to fit standard T-Bar/Grid Spacing for seamless fit. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements.

Mounting Option

TC1 - 9/16" Flat T-Bar Mount TC2 - 9/16" Bolt Slot T-Bar Mount



TC3 - 15/16" Flat T-Bar Mount



SMARTBEAM® TECHNOLOGY

The Ultimate Control of Lighting Distributions

SmartBeam makes it easy to specify the exact light required for any architectural space. Available in every XICO product; it is now possible to create truly tailored and engaging lighting that transform spaces, improves visual comfort, and saves energy.

To learn more about our SmartBeam Technology, please click or scan the QR Code.



Direct Optics Choices

DIRECT OPTICS	BEAM PATTERN		
	DLAM	DBW60	DA5025
Flush Lens			
Regressed Lens			

LPW Efficacy Conversion Chart

CODE	CCT SELECTED							
	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
80	–	0.91	0.96	1.00	1.04	1.11	1.11	1.11
90	–	0.91	0.96	1.00	1.04	1.11	1.11	1.11
95	–	0.91	0.96	1.00	1.04	1.11	1.03	1.04
SUN	–	0.90	0.92	1.00	1.01	1.07	1.04	1.05

LPW Performance


	DIRECT		
	DLAM	DBW60	DA5025
LM/W	110	109	141

DIRECT PHOTOMETRICS

Static White Light


48" Length, 80+/3500K CRI/CCT, 3,000 Lumens

DLAM: Lambertian




LM/FT	W/FT	LM/W
350	3.2	109.4
500	4.5	111.1
750	6.8	110
1000	9	111.1

DBW60: Batwing 60°



LM/FT	W/FT	LM/W
350	3.2	109.4
500	4.6	108.7
750	6.9	109
1000	9.2	108.7

DDA70: Double Asymmetric 70°




LM/FT	W/FT	LM/W
350	2.5	140
500	3.5	142.9
750	5.3	141
1000	700	142.9

COMPATIBLE OPTIC

FLUSH LENS	REGRESSED LENS

LED OPTIONS

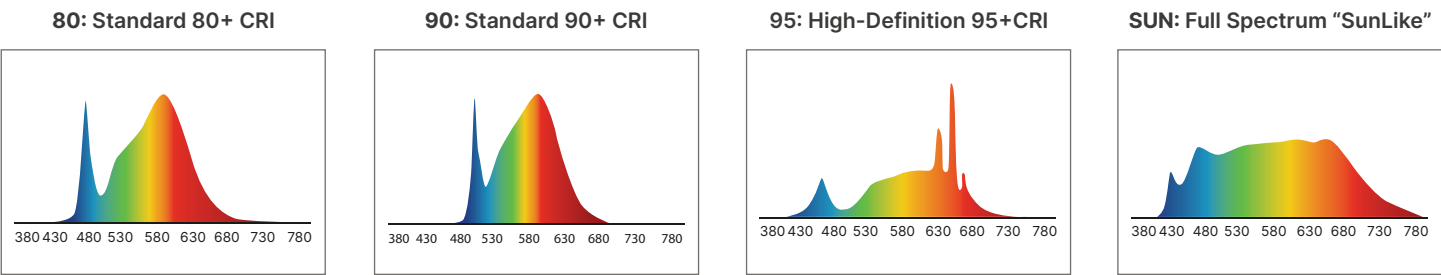

CODE	DESCRIPTION	TYPICAL LED DATA							
		CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	M/P Ratio	LPW
80	Standard 80 CRI	3500K	82.5	7.8	84	96.7	82.5	0.51	190
90	Standard 90 CRI	3500K	91	54.3	89.3	98.9	89.2	0.55	175
95	High Definition 95 CRI	3500K	97.1	95	–	–	–	0.70	163
SUN	Full Spectrum SunLike®	3500K	95	85	–	–	–	–	130

POWER & CONTROLS

Voltage

Fixture Voltage (AC)

120–277 VAC

347 VAC, 50/60 Hz

Power Location

Fixture Mounted or Remote

LED Driver

Factory Selected, 36–39V Constant Current

Drivers

FDND - Factory Non-Dimming**FD00** - Factory 0-10V 0.1% Dim**FD01** - Factory 0-10V 1% Dim**FD10** - Factory 0-10V 10% Dim**FDDA** - Factory DALI 0.1% Dim**FDDX** - Factory DMX Dim**FDTR** - Factory TRIAC Dim**LD01** - Lutron Hi-Lume 1% Dim**X_** - Specify Driver

Emergency Backup (Optional)

EMC - Emergency Circuit**EMB** - Emergency Battery

(10 W — Remote)

X_ - Specify Backup**Power**

10 W

Illumination Time

90 minutes

IP RatingSuitable for Dry and Damp Locations,
indoor use only

XBox

**Remote Driver Boxes
(Optional)**

To create a clean and organized power solution for multiple fixture installations see our Xbox Specification Guide. Reach out to a XICO Sales Representative to discuss your project's needs.

Compatible Control Options



TECHNICAL SPECIFICATIONS

Finishes & Design Options

Housing Colors (Matte Finish)

White (RAL9003)
Black (RAL9005)
Gray (RAL7001)
Custom RAL



Housing Material

6063-T5 extruded, recycled aluminum

Mounting Brackets

Sheet Metal

Flat End Cap Material

Machined or cast aluminum

Lens Options and Material

Flush, Regressed, Micro Baffle, and Round Micro Cavity Optics
(MCO) lens options with Patented SmartOptics® made from Acrylic
(PMMA)

Standards & Certifications

Sustainability

Low carbon, environmentally conscious packaging and shipping methods

Compliance

BABAA & TAA compliant in-house manufacturing in Boston, MA with North American supply chain



Certifications



Declare Listed and Red List Free

Low carbon, environmentally conscious packaging and shipping methods

Recyclable

SmartOptics and all powder coated and anodized parts are fully recyclable at end of life

Manufacturing

All XICO products and associated optics and LED engines are assembled at our factory in Woburn, MA

Quality Assurance

Each product is engineered reliability and quality assurance tested

Declare.

Nano Series

XICO Lighting

Final Assembly: Woburn, MA, USA
Life Expectancy: 10+ Years
End of Life Options: Recyclable (99%)

Ingredients:

Aluminum, Glass, oxide, chemicals, Polymethyl methacrylate, Phenol, 4,4'-O-methylhydroquinone, polymer with 2,2'-(3,3'-methylenebis(4-methyl-5-phenyleneoxy)bis(phenylene)), 1,3-benzenedicarboxylic acid, 1,3-dimethyl ester, polymer with 1,4-dimethyl-5-benzenedicarboxylic acid and 1,2-ethanediol, Polyethylene Glycol, Polyethylene Terephthalate, Barium Sulfate, Hexamethylenesiloxane, Phosphoric acid, phosphoric acid, diphenyl ether, iron, titanium, and silicones, d-mc, Chromium, metallic, Gold, Nanoparticles, Titanium, Zinc, Nickel, Plastic.

Declare Listed

At Xico Lighting, we are committed to transparency and sustainability. That's why all our products are Declare listed, providing clear insights into their environmental footprint and safety. Look for these internationally recognized labels on Xico products, packaging, or at xicoled.com/declare.




Red List Free

Xico Lighting is dedicated to creating safe, sustainable solutions. All our products are Red List Free, meeting the highest industry standards for healthy and environmentally responsible materials as defined by the International Living Future Institute (ILFI). Learn more at xicoled.com/declare.

Quick Links

5-YR Warranty



Business Terms



Patents & Trademarks



SmartBeam



Revit Files

