


# EDGESolo200 Woodworks®

# XICO®

Direct | Standard Lengths


Project Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

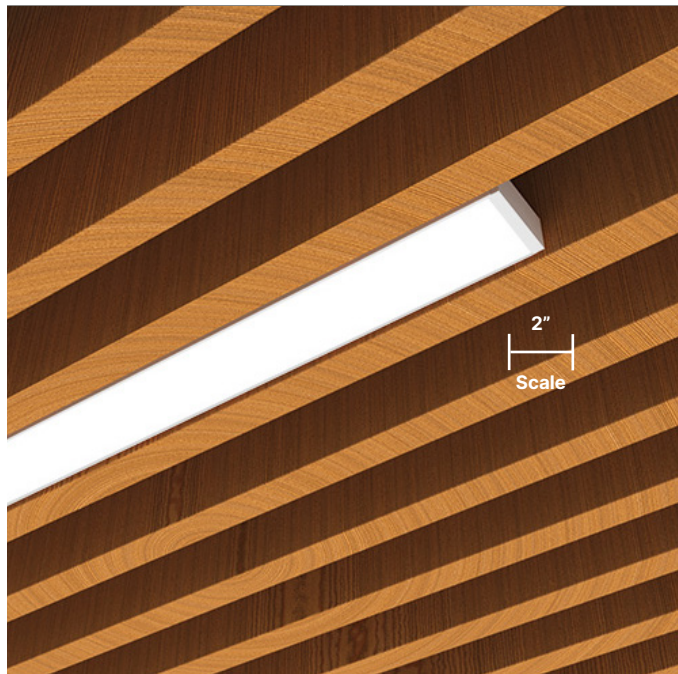

Remote Driver

## LIGHTING CONFIGURATIONS



## DESCRIPTION

### Linear Downlight for Wood Ceiling Grids

EDGESolo200 Woodworks is an innovative low-profile LED luminaire designed to fit within a 2" space between grills in an Armstrong Woodworks® ceiling panel. EDGESolo200 Woodworks is only 1" high and provides the perfect direct light with a range of symmetric and asymmetric lighting distributions available. EDGEproducts all provide best-in-class efficiency and beam control options. EDGESolo200 Woodworks is specification-grade with high lumen per foot, high CRI, and circadian options. EDGESolo200 Woodworks incorporates an engineered LED light engine with fully customizable choices for lumen output, CCT, and CRI.

## FEATURES & BENEFITS

### Exceptional Performance

Up to 1,000 lm/ft, 135 lm/W efficacy. Low Glare (UGR<19) WELL Building Standard™ and LEED certified when specified less than 350 lm/ft.

### LED Selections

Static

### Designed with Options

Wide choice of SmartOptic® lenses, beam distributions, 80/90/95+ CRI, 2700K to 6500K CCT, and 0-10V, DALI, DMX, and TRIAC dimming

### Patented Innovations

Fusion® Optix Inside with unique SmartBeam® capabilities

### Proprietary Optical Components

Provides excellent light distribution and high-transmission

### Committed to Sustainability

Declare Listed and Red Free List materials

### Compliance

UL Listed, Dry and Damp Locations

### 5-Year Warranty

Standard 5-year warranty, 50,000 hours

Declare



bios



Designed & Built in  
**BOSTON**

## FIXTURE ORDERING

Project Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

### 1) FIXTURE DESIGN

PRODUCT	FIXTURE LENGTH	FINISH	END CAP STYLE
<b>ESO200-WW</b> Edge-Aperature Linear Downlight for Wood Ceiling Grids	<b>2</b> - 2 ft <b>4</b> - 4 ft <b>6</b> - 6 ft <b>8</b> - 8 ft <b>X_</b> - Specify Ft', In"  Custom fixtures are available in 3" increments beyond standard lengths.	<b>Powder Coated</b> <b>PMW</b> - Matte White <b>PMB</b> - Matte Black <b>PMG</b> - Matte Gray <b>PRAL_</b> - Specify RAL #  <b>Anodized</b> <b>ACL</b> - Clear Anodized <b>ACU_</b> - Custom Anodized #	<b>E1</b> - Flat End Cap <b>E2</b> - Chamfered End Cap

### 2) LED LIGHT ENGINE

CRI	CCT	OPTIC (DIRECT ONLY)	DIRECT BEAM PATTERN	DIRECT OUTPUT
<b>80</b> - Std. 80 CRI <b>90</b> - Std. 90 CRI <b>95</b> - High-Def. 95 CRI <b>SUN</b> - Full SunLike	<b>27</b> - 2700K <b>30</b> - 3000K <b>35</b> - 3500K <b>40</b> - 4000K <b>X_</b> - Specify CCT	<b>OSL</b> - Standard Lens <b>WLB</b> - White Linear Baffle¹ <b>BLB</b> - Black Linear Baffle¹ <b>WHB</b> - White Hexagonal Baffle¹ <b>BHB</b> - Black Hexagonal Baffle¹ <b>CHB</b> - Chrome Hexagonal Baffle¹  <b>GRL</b> - Glare Reduction Lens (LEED certified and meets the WELL Building Standard™ with output less than 350 lm/ft)	<b>NN</b> - Not Needed <b>DLAM</b> - Lambertian <b>DBW65</b> - Batwing 65° <b>DA5025</b> - Asym 50° at 25° Tilt <b>X_</b> - Specify Beam²  <b>DLAM</b> - Lambertian	<b>NN</b> - Not Needed <b>35</b> - 350 lm/ft <b>50</b> - 500 lm/ft <b>75</b> - 750 lm/ft <b>100</b> - 1,000 lm/ft <b>X_</b> - Specify lm/ft

### 3) FIXTURE POWER & CONTROLS

LINE VOLTAGE (DC)	REMOTE DRIVER (POWER)³	
<b>UNV</b> - 120/277V <b>347</b> - 347V	<b>FDND</b> - Factory Non-Dimming <b>FD00</b> - Factory 0-10V 0.1% Dim <b>FD01</b> - Factory 0-10V 1% Dim <b>FD10</b> - Factory 0-10V 10% Dim <b>FDDA</b> - Factory DALI 0.1% Dim <b>FDDX</b> - Factory DMX Dim <b>FDTR</b> - Factory TRIAC Dim <b>LD01</b> - Lutron Hi-Lume 1% Dim <b>X_</b> - Specify Driver	Footnotes: ¹ Baffle lens options reduce efficacy. Contact factory for lm/W data. ² Contact factory about custom beam options. ³ Standard driver box is included


### 4) FIXTURE MOUNTING & CONNECTIONS

WOODWORKS TYPE	CEILING INTEGRATION CLIP	POWER CORD
<b>A1</b> - Grille Classic <b>A2</b> - Grille Tegular 9/16" <b>A3</b> - Grille Tegular 15/16" <b>A4</b> - Grille Forte <b>A5</b> - Linear Solid Wood Panels <b>A6</b> - Linear Veneered Panels	<b>WW225</b> - XICO Integration Clip Slat Hgt 2.25" <b>WW325</b> - XICO Integration Clip Slat Hgt 3.25" <b>WW425</b> - XICO Integration Clip Slat Hgt 4.25" <b>WW40T</b> - XICO Integration Clip Turf UNV	<b>P24W</b> - 24" White Cable Kit <b>P24B</b> - 24" Black Cable Kit


OPTIONAL	
EMERGENCY BACKUP	WIRELESS MODULE
<p><b>EMC</b> - Emergency Circuit <b>EMB</b> - Emergency Battery (10W — Remote) <b>X_</b> - Specify Backup</p> <p>Specify requirements at time of order.</p>	<p><b>WCN</b> - Wireless Communication Node (Connected to LED Driver In-Fixture or In-Driver Box) <b>PIR</b> - Wireless Communication Node + PIR Sensor (Standard Lens for Low Bay &lt; 10') <b>MW</b> - Wireless Communication Node + MW Sensor (Standard for Low Bay &lt; 10') <b>X_</b> - Other – Specify Embedded Component or Specific Non-Standard Sensor Detection Range</p>

DIMENSIONS & INSTALLATION

Dimensions

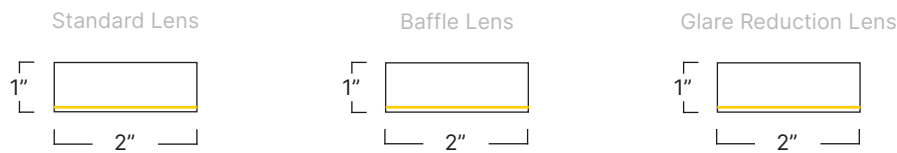


Standard Fixtures

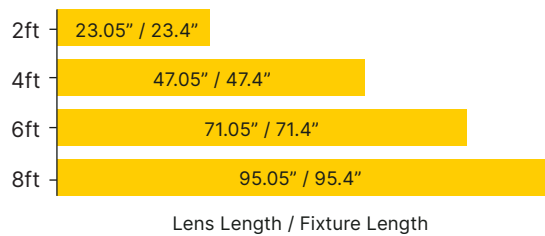

Mounting Type

**Woodworks Integration**      Installs into a wood slat cavity via an integration clip. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements.

Mounting Options

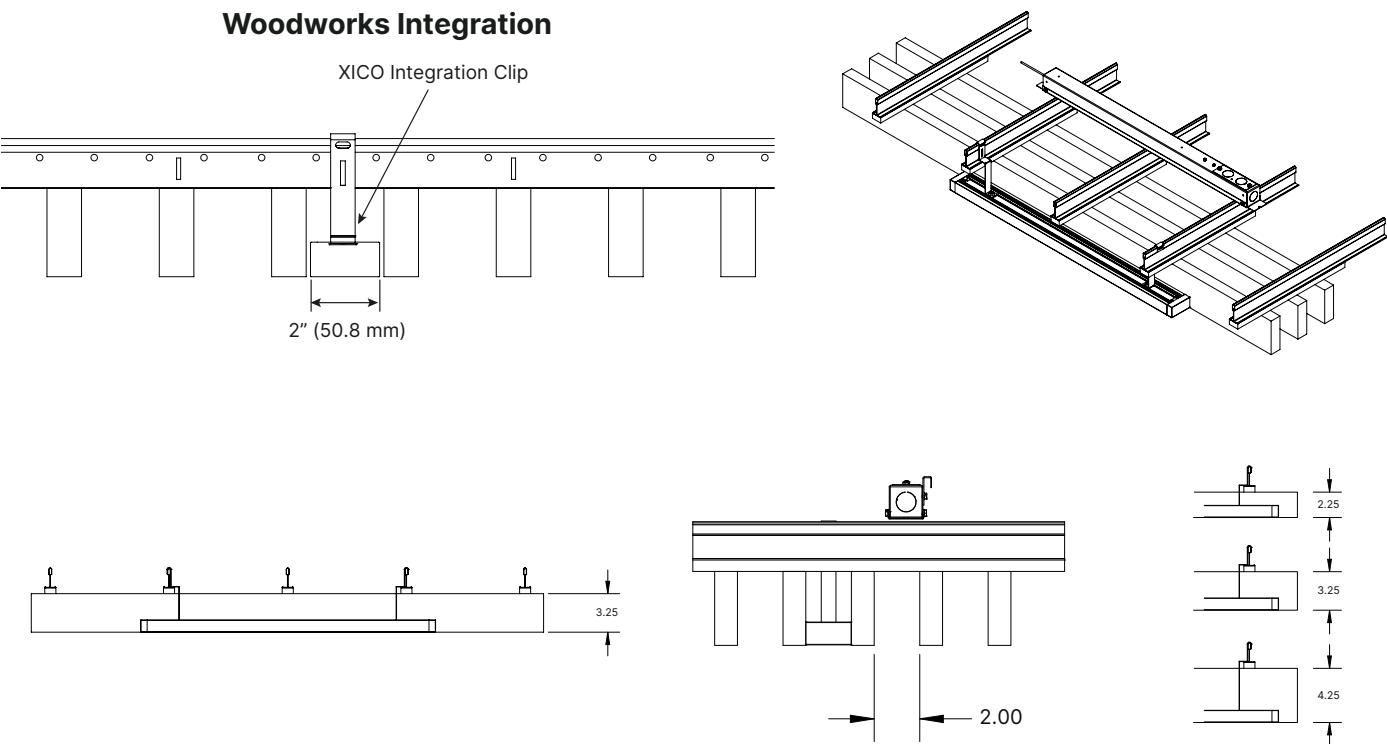











**SMARTBEAM® TECHNOLOGY****The Ultimate Control of Lighting Distributions**

SmartBeam makes it easy to specify the exact light required for any architectural space. Available in every XICO product; it is now possible to create truly tailored and engaging lighting that transform spaces, improves visual comfort, and saves energy.

To learn more about our SmartBeam Technology, please click or scan the QR Code.

**Direct Optics Choices**

DIRECT OPTICS	BEAM PATTERN		
	DLAM	DBW65	DA5025
Standard Lens			
Linear Baffle			
Hexagonal Baffle			
Glare Reduction Lens			

**LPW Efficacy Conversion Chart**

CODE	CCT SELECTED							
	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
80	–	0.91	0.96	1.00	1.04	1.11	1.11	1.11
90	–	0.91	0.96	1.00	1.04	1.11	1.11	1.11
95	–	0.91	0.96	1.00	1.04	1.11	1.03	1.04
SUN	–	0.90	0.92	1.00	1.01	1.07	1.04	1.05

**LPW Performance**


	DIRECT		
	DLAM	DBW65	DA5025
LM/W	110	109	141

## DIRECT PHOTOMETRICS

48" Length, 80+/3500K CRI/CCT, 3,000 Lumens


Static White Light

**DLAM:** Lambertian




LM/FT	W/FT	LM/W
350	3.2	109.4
500	4.5	111.1
750	6.8	110
1000	9.1	109.9

**DBW65:** Batwing 65°



LM/FT	W/FT	LM/W
350	3.2	109.4
500	4.5	111.1
750	6.8	109
1000	9.1	109.9

**DA5025:** Asymmetric 50° at 25° Tilt



LM/FT	W/FT	LM/W
350	2.5	140
500	3.5	142.9
750	5.3	141
1000	7.1	140.8

### COMPATIBLE OPTIC

FLUSH LENS	LINEAR BAFFLE	HEXAGONAL BAFFLE	GLARE REDUCTION LENS

## OPTICS CONFIGURATIONS


<b>Standard Lens</b>	<b>Linear Baffle</b>	<b>Hexagonal Baffle</b>	<b>Glare Reduction Lens</b>
White Standard Lens <b>OSL</b>	White Linear Baffle <b>WLB</b>	White Hexagonal Baffle <b>WHB</b>	White Glare Reduction Lens <b>GRL</b>
	Black Linear Baffle <b>BLB</b>	Black Hexagonal Baffle <b>BHB</b>	
		Chrome Hexagonal Baffle <b>CHB</b>	

## WELL Building Standard™ and LEED Certification

EDGESolo products are LEED certified and meet the WELL Building Standard™ for low glare (UGR <19) when specified with a low-glare lens option and configured at or below maximum lumen-per-foot output. Refer to the chart below for qualifying configurations and performance data.

LM/FT	EDGESolo			
	ESO200	ESO275	ESO325	ESO525
350				
400				
500				
750				

LED OPTIONS

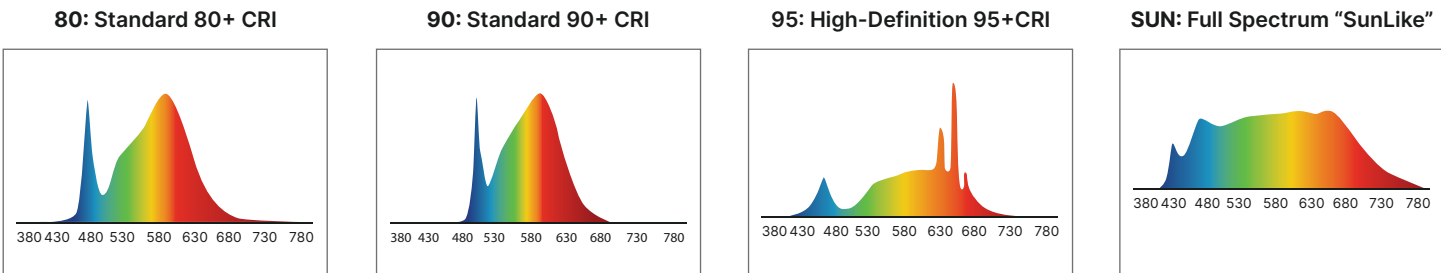

CODE	DESCRIPTION	TYPICAL LED DATA							
		CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	M/P Ratio	LPW
80	Standard 80 CRI	3500K	82.5	7.8	84	96.7	82.5	0.51	190
90	Standard 90 CRI	3500K	91	54.3	89.3	98.9	89.2	0.55	175
95	High Definition 95 CRI	3500K	97.1	95	–	–	–	0.70	163
SUN	Full Spectrum SunLike®	3500K	95	85	–	–	–	–	130

## POWER & CONTROLS

### Voltage

**Fixture Voltage (AC)**

120–277 VAC

347 VAC, 50/60 Hz

**Power Location**

Remote

**LED Driver**

Factory Selected, 36–39V Constant Current

### Drivers

**FDND** - Factory Non-Dimming  
**FD00** - Factory 0-10V 0.1% Dim  
**FD01** - Factory 0-10V 1% Dim  
**FD10** - Factory 0-10V 10% Dim  
**FDDA** - Factory DALI 0.1% Dim  
**FDDX** - Factory DMX Dim  
**FDTR** - Factory TRIAC Dim  
**LD01** - Lutron Hi-Lume 1% Dim  
**X\_** - Specify Driver

### Emergency Backup (Optional)

**EMC** - Emergency Circuit  
**EMB** - Emergency Battery  
(10 W — Remote)  
**X\_** - Specify Backup

**Power**

10 W

**Illumination Time**

90 minutes

### IP Rating

Suitable for Dry and Damp Locations,  
indoor use only**XBox****Remote Driver Boxes  
(Optional)**

To create a clean and organized power solution for multiple fixture installations see our XBox Specification Guide. Reach out to a XICO Sales Representative to discuss your project's needs.

### Compatible Control Options





