


GRIDSlot1.5 Shapes

1.5" Low-Profile Shapes for T-Bar-based Ceiling Grids

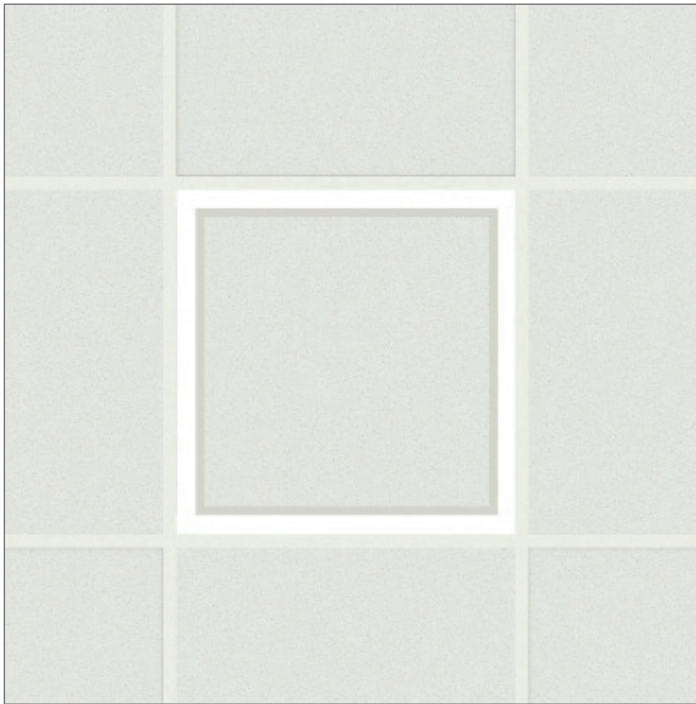

Fixture Mounted or Remote Driver

Features & Benefits

Exceptional Performance

Up to 1,000 lm/ft, 150 lm/W efficacy

Wide Range of LED Selections

Static, Tunable White, and Dim-to-Warm

Designed with Options

Wide choice of SmartOptic® lenses, beam distributions, 80/90/95+ CRI, 2200K to 5000K CCT, and 0-10V, DALI, DMX, and TRIAC dimming

Patented Innovations

Fusion® Optix Inside with unique SmartBeam® capabilities

Proprietary Optical Components

Provides excellent light distribution and high-transmission

Committed to Sustainability

Declare Listed and Red Free List materials

Compliance

UL Listed, Dry and Damp Locations

5-Year Warranty

Standard 5-year warranty, 50,000 hours

Designed & Built in
BOSTON

Declare



FIXTURE ORDERING

1) FIXTURE DESIGN

Project Name

Fixture Type

PRODUCT	T-BAR GRID STYLE	SHAPES	FINISH	OPTIC
GSLSH-R				
1.5" Linear LED Shapes for T-Bar Mount	T1 9/16" Flat T-Bar Type T2 9/16" Bolt & Slot Type T3 15/16" Flat T-Bar Type X_ Specify Mounting Type	SQ2X2 2'; Square RT4X2 4'x2'; Rectangle RT4X1 4'x1' Rectangle TR45X2 2', 45° Triangle TR60X2 2', 60° Triangle TR60X4 4', 60° Triangle TR75X2 2', 75° Triangle TR75X4 4', 75° Triangle TR90X2 2', 90° Right Triangle TR90X4 4', 90° Right Triangle SQX_ Specify X', Y" Square RTX_ Specify X', Y" Rectangle UX_ Specify X', Y" U-Shape	MWH Matte White (RAL9003) MBK Matte Black (RAL9005) MGR Matte Gray (RAL7001) CAE Clear Anodized Effect RAL_ Specify RAL#	OFL Flush Lens

2) LED LIGHT ENGINE

CRI	CCT	DIRECT BEAM PATTERN	DIRECT OUTPUT
S80 Std. 80 CRI	22 2200K	DLAM Lambertian	35 350 lm/ft
S90 Std. 90 CRI	27 2700K	DBW60 Batwing 60°	50 500 lm/ft
HE80 High-Eff. 80 CRI	30 3000K	DDA70 Double Asymmetric 70°	75 750 lm/ft
HE90 High-Eff. 90 CRI	35 3500K	DA3015 Asymmetric 30° at 15° Tilt	100 1,000 lm/ft
HD95 High-Def. 95 CRI	40 4000K	DA3010 Asymmetric 30° at 10° Tilt	X_ Specify lm/ft
SUN Full SunLike	50 5000K	DM55 Medium 55°	
SBIOS Static BIOS	3022D 3000K to 2200K Dim-to-Warm	DN40 Narrow 40°	
DBIOS Dynamic BIOS	3527D 3500K to 2700K Dim-to-Warm	X_ Specify Beam	
TBIOS Tunable White BIOS	X_ Specify CCT		

3) FIXTURE POWER & CONTROLS

LINE VOLTAGE (DC)	DRIVER LOCATION	DRIVER (POWER)	REMOTE DRIVER BOX ¹	EMERGENCY BACKUP	CONTROL SYSTEM ³
UNV 120/277V	FMD Fixture Mounted Driver	FDND Factory Non-Dimming	NN Not Needed	NN Not Needed	NN Not Needed
347 347V		FD01 Factory 0-10V 1% Dim	RLDB² Remote Linear Driver Box (driver included by default)	EMC Emergency Circuit	LUT Lutron
	RD Remote Driver	FD10 Factory 0-10V 10% Dim		EMB Emergency Battery (10 W — Onboard or Remote)	COO Cooper
		FDDA Factory DALI 0.1% Dim	RX2D² Optional Remote XBox2 Driver, Up to 2 Drivers	X_ Specify Backup	CAS Casambi
		FDDX Factory DMX Dim			X_ Specify Control System
		FDTR Factory TRIAC Dim	RX3D² Optional Remote XBox3 Driver, Up to 3 Drivers		
		LD01 Lutron Hi-Lume 1% Dim			
		LD05 Lutron 5-Series 5% Dim	RX5D² Optional Remote XBox5 Driver, Up to 5 Drivers		
		ED00 eldoLED 0-10V 0.1% Dim			
		ED01 eldoLED 0-10V 1% Dim			
		EDDA eldoLED DALI 0.1% Dim			
		X_ Specify Driver			

4) FIXTURE MOUNTING & CONNECTIONS

POWER CORD

S24WH 24" White Cable Kit
S24BK 24" Black Cable Kit

Footnotes: ¹ Remote distance is dependent on driver type, up to 100' (30.5 m). ² Creates a clean and organized power solution for multiple fixture installations.
³ The control system and driver must be compatible.


NOTES

Project Name

Fixture Type

REMOTE DRIVER BOX

Dimensions

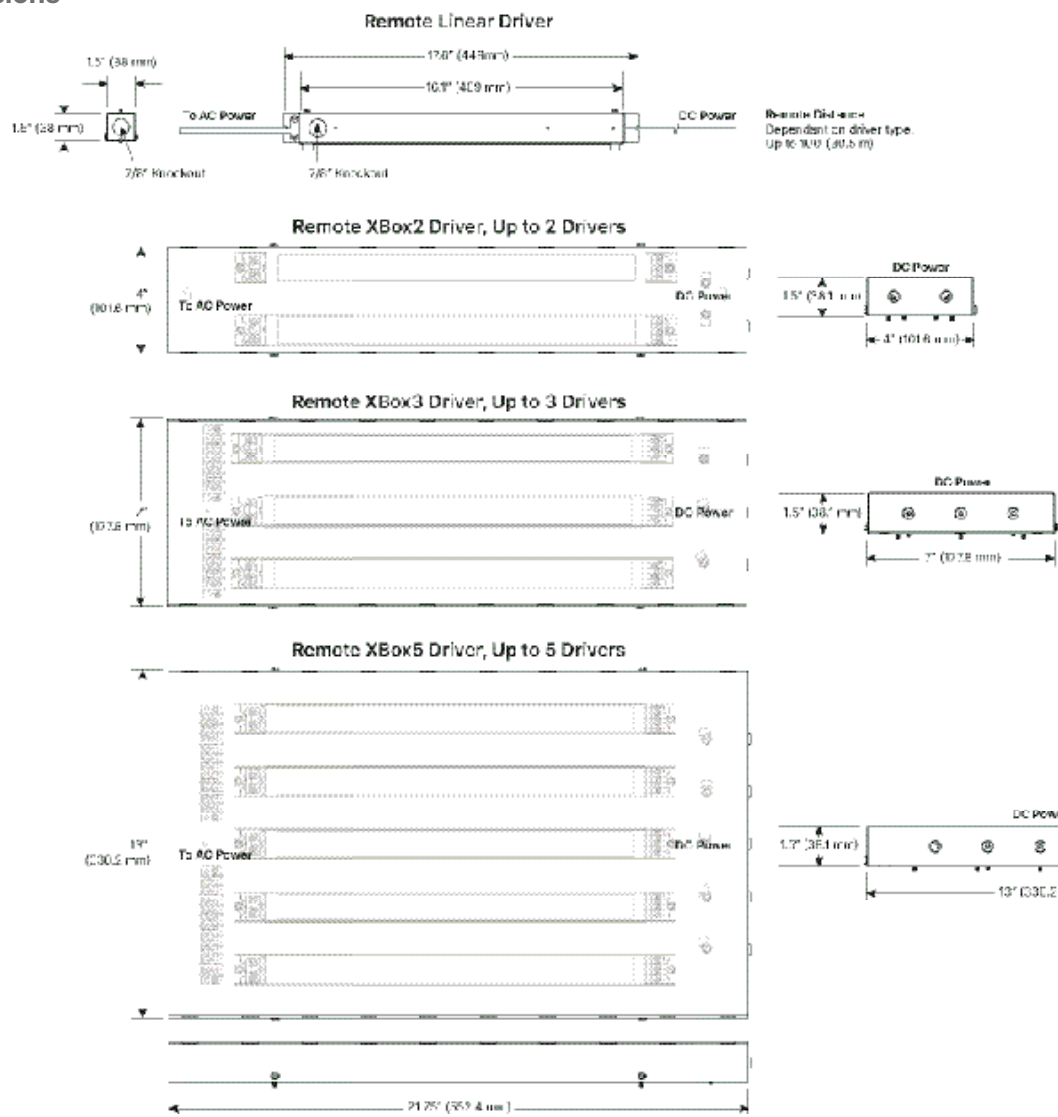


FIXTURE DESIGN

Dimensions



To download BIM (Revit) Files, please click or scan the QR Code.

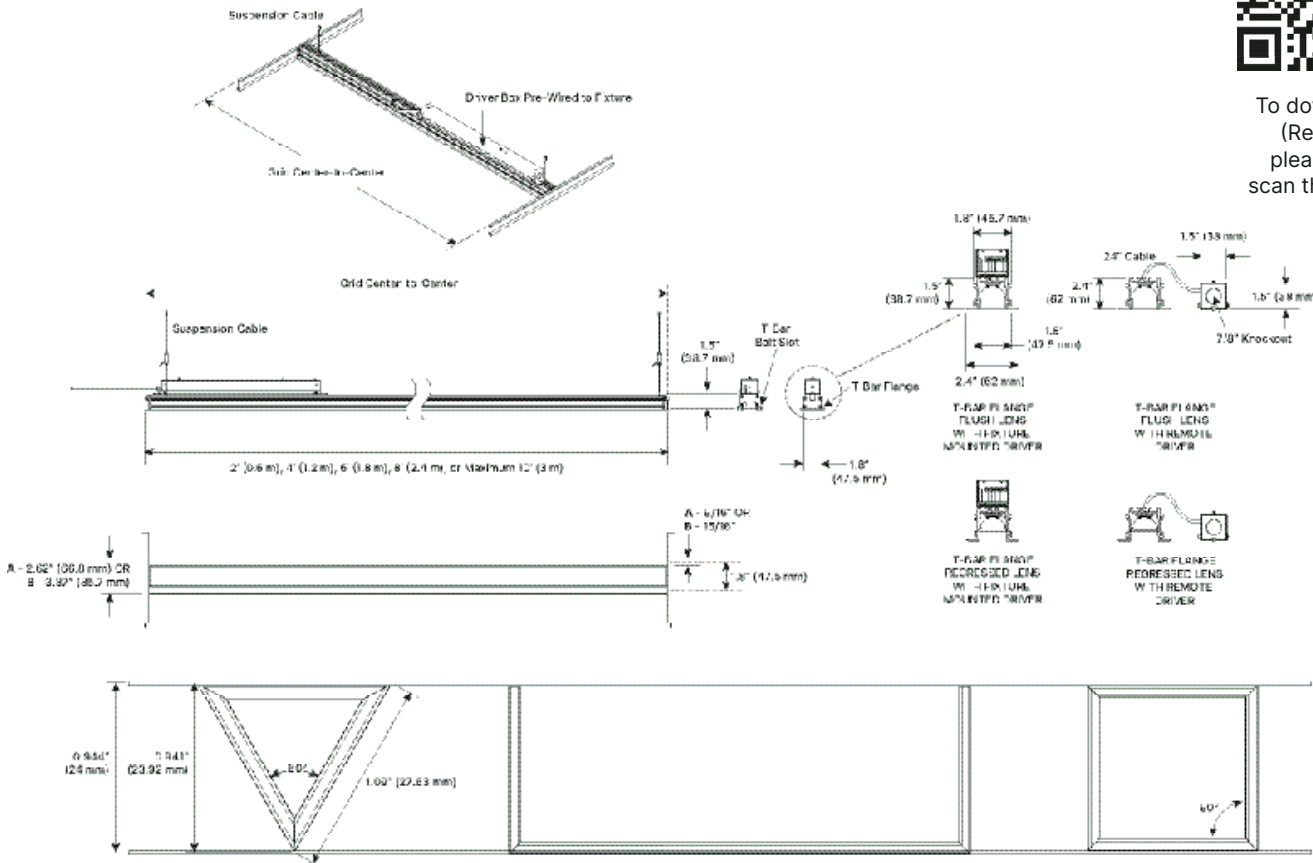

Length

Length Options

2', 4', 6', 8', 10' nominal, or custom within 3"

Finish

Housing Colors (Matte Finish)



White (RAL9003)



Black (RAL9005)



Gray (RAL7001)



Clear Anodized Effect



Custom RAL

Housing Material

6063-T5 extruded, recycled aluminum

Mounting Brackets

Sheet metal

Optic

Lens Options

Flush, Regressed and Micro Baffle (Requires Regressed Lens)

Lens Material

Patented SmartOptics® made from Acrylic (PMMA)


Voltage

Fixture Voltage (AC)


120-277 VAC and 347 VAC, 50/60 Hz

LED SELECTION GUIDE


S80: Standard 80+ CRI

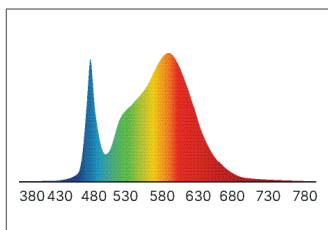


S90: Standard 90+ CRI

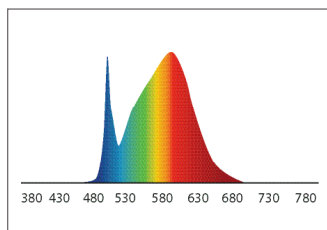


HE80: High-Efficiency 80+ CRI

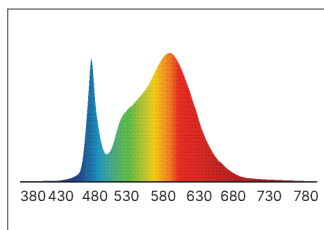


HE90: High-Efficiency 90+ CRI

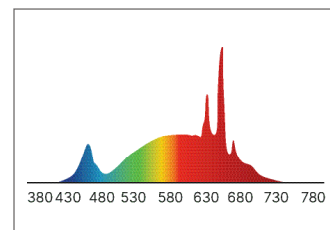


HD95: High-Definition 95+ CRI

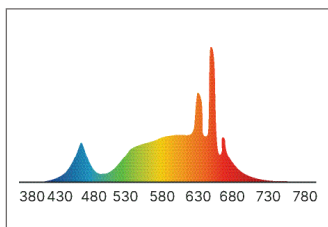


SUN: Full Spectrum "SunLike"

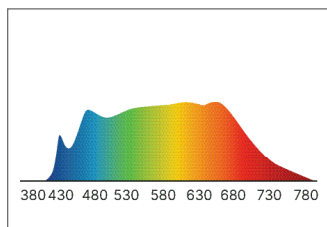

HCD: Human Centric Day

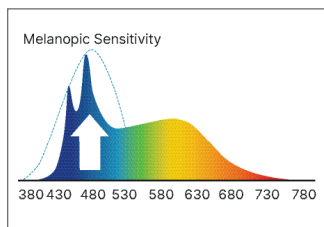

HCN: Human Centric Night

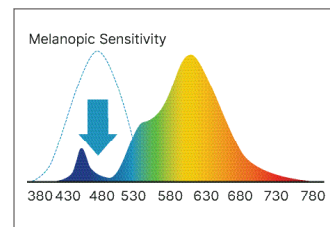

Static White Light (LED Light Engine Only)

CODE	DESCRIPTION	TYPICAL LED DATA							
		CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	M/P Ratio	LPW
S80	Standard 80 CRI	3500K	82.5	7.8	84	96.7	82.5	0.51	190
S90	Standard 90 CRI	3500K	91	54.3	89.3	98.9	89.2	0.55	175
HE80	High Efficiency 80 CRI	3500K	82.1	5.9	83	94.2	81.2	0.52	210
HE90	High Efficiency 90 CRI	3500K	92.2	90	90.7	103.8	92.1	0.56	190
HD95	High Definition 95 CRI	3500K	97.1	95	–	–	–	0.70	163
SUN	Full Spectrum SunLike®	3500K	95	85	–	–	–	–	130
HCD	Human Centric Day	4000K	83	95	–	–	–	0.92	155
HCN	Human Centric Night	2700K	80	–	–	–	–	0.44	134

LPW Efficacy Conversion Chart

CODE	CCT SELECTED							
	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
S80	–	0.91	0.96	1.00	1.04	1.11	1.11	1.11
S90	–	0.91	0.96	1.00	1.04	1.11	1.11	1.11
HE80	–	0.96	0.99	1.00	1.03	1.04	1.03	1.03
HE90	–	0.91	0.96	1.00	1.04	1.11	N/A	N/A
HD95	–	0.91	0.96	1.00	1.04	1.11	1.03	1.04
SUN95	–	0.90	0.92	1.00	1.01	1.07	1.04	1.05
HCD	–	N/A	0.96	1.00	1.04	1.04	1.04	1.04
HCN	–	0.87	0.96	1.00	1.04	N/A	N/A	N/A

BIOS TECHNOLOGY

Choosing Your BIOS Solution


BIOS is offered in four Circadian LED Solutions with BIOS SkyBlue Technology — Biological Static, Biological Dynamic, Biological Tunable, and Biological Dim-to-Warm. BIOS SkyBlue™ Technology includes a blue peak at 490nm that provides an effective daytime circadian signal using standard architectural color temperatures.

bios


To learn more about BIOS Technology, please click or scan the QR Code.




BIOS Static

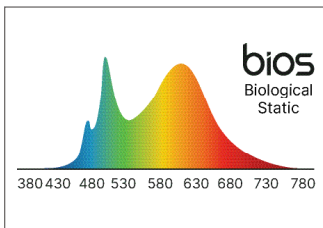


BIOS Dynamic

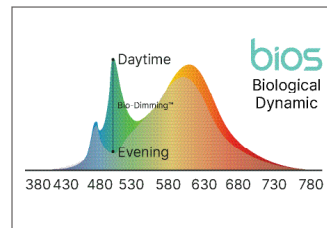

BIOS Tunable

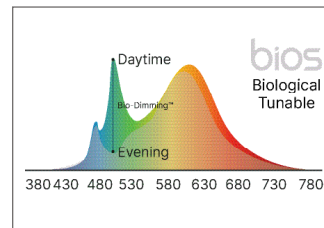

BIOS Dim-to-Warm

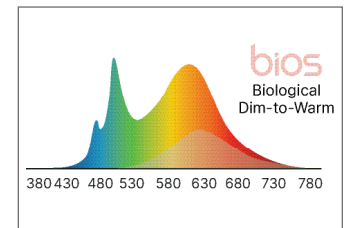

Daytime

No color change when dimmed

Spaces that operate during daytime hours — 7am and 7pm

Daytime & Evening

500K shift when dimmed

Spaces that operate overnight — after 7pm and before 7am

Daytime & Evening

Dims to 2700K

Spaces that operate with overnight shifts — after 7pm and before 7am

Daytime & Evening

Dims from cool to warm

Spaces where people sleep — after 7pm and before 7am

Circadian and Human Centric Light

CODE	DESCRIPTION	BIO-DIMMING MODULE TECHNOLOGY GUIDE					
		Driver	Driver Voltage	CCT	Requires BIO-Dimming Module	Lighting Control	BIOS SkyBlue (490nm)
SBIOS	BIOS Static	DIM1	0-10V Dimming to 1% Dim-to-Dark	No CCT Change	No	Intensity Dimming Control Only	Always Present
DBIOS	BIOS Dynamic	BIODIM1	0-10V Intensity Dimming to 1% Dim-to-Dark	500K Shift	Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming
DBIOS-2	BIOS Dynamic (Two Channel)				No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"
TBIOS	BIOS Tunable	ATW / DTW	0-10V Control of Intensity & CCT on Separate 2 Channels / DALI Control of Intensity & CCT on Separate 2 Channels	Dims to 2700K	Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming
TBIOS-2	BIOS Tunable (Two Channel)				No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"
DWBIOS	BIOS Dim-to-Warm	-	-	Dims to 2200K	Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming
DWBIOS-2	BIOS Dim-to-Warm (Two Channel)				No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"

SMARTBEAM® TECHNOLOGY

The Ultimate Control of Lighting Distributions

SmartBeam makes it easy to specify the exact light required for any architectural space. Available in every XICO product; it is now possible to create truly tailored and engaging lighting that transform spaces, improves visual comfort, and saves energy.

To learn more about our SmartBeam Technology, please click or scan the QR Code.



FIXTURE POWER & CONTROLS

Voltage

LED Driver Factory Selected, 36–39V Constant Current

Emergency Backup

Backup Types Emergency Circuit, Emergency Battery Onboard or Remote, and other emergency backups are available

Wiring Typically the Emergency Backup is wired to 48” sections

Power 10 W

Illumination Time 90 minutes

Partners



Control Systems

Drivers (Remote Drivers Sold Separately)

Other Factory Non-Dimming, Factory 0–10V 1% Dim, Factory 0–10V 10% Dim, Factory DALI 0.1% Dim, Factory DMX Dim, Factory TRIAC Dim, eldoLED 0–10V 0.1% Dim, eldoLED 0–10V 1% Dim, eldoLED DALI 0.1% Dim, and other drivers are available, consult factory (not all integral)


Lutron Hi-Lume 1% Dimming and 5-Series 5% Dimming

Cooper Compatible driver


Casambi (wireless) Compatible driver

XBox


Remote Driver Boxes (Optional) To create a clean and organized power solution for multiple fixture installations see our Xbox Specification Guide. Reach out to a XICO Sales Representative to discuss you projects needs.

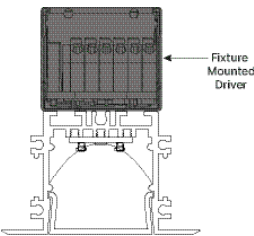


Fixture Mounted Drivers mount on top of the fixture. They provide 0–10V, DALI, DMX, and TRIAC dimming. Also compatible with Cooper and other common building control systems, including PoE and wireless.

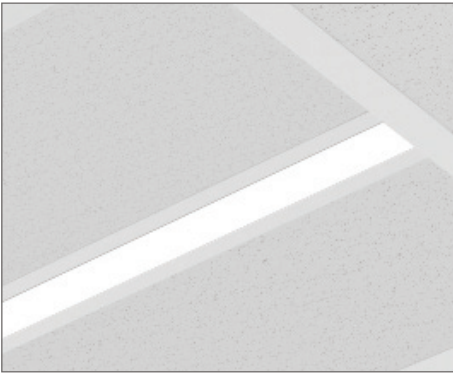

Flush Lens

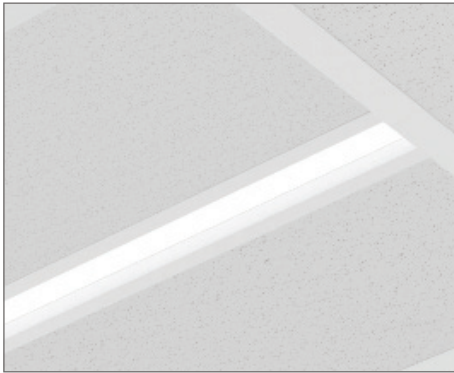

Regressed Lens

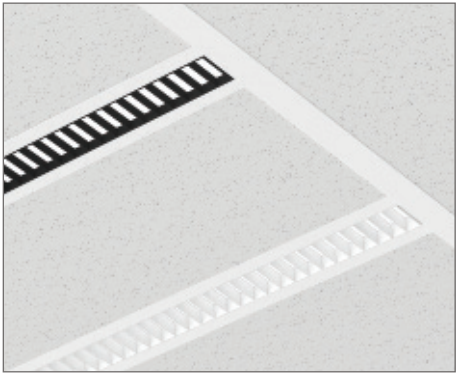

Micro Baffles

FIXTURE MOUNTING & CONNECTIONS

Mounting Type

T-Bar Mount Specifically designed to fit standard T-Bar/Grid Spacing for seamless fit. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements.

Power Cord


24" Cable Kit White and Black

Mounting Kit


Suspension Cable Stainless Steel

Mounting Options


T1 - 9/16" Flat T-Bar Mount



T2 - 9/16" Bolt Slot T-Bar Mount




T3 - 15/16" Flat T-Bar Mount




Standard Lengths & Continuous Runs

Maximum length of one fixture is 10'. Longer runs can be produced by joining sections. Customer approval of shop drawings is required prior to build of any non-standard length order.

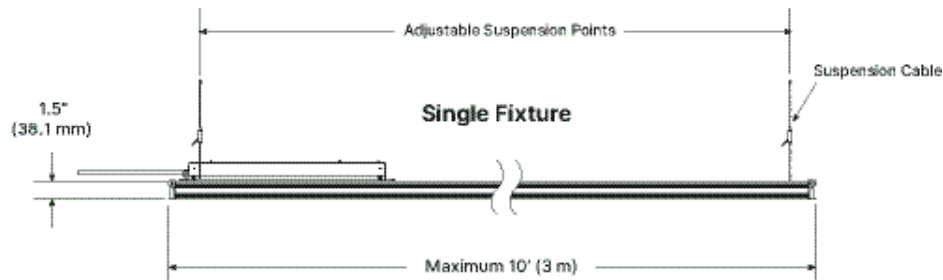

Emergency Battery Backup

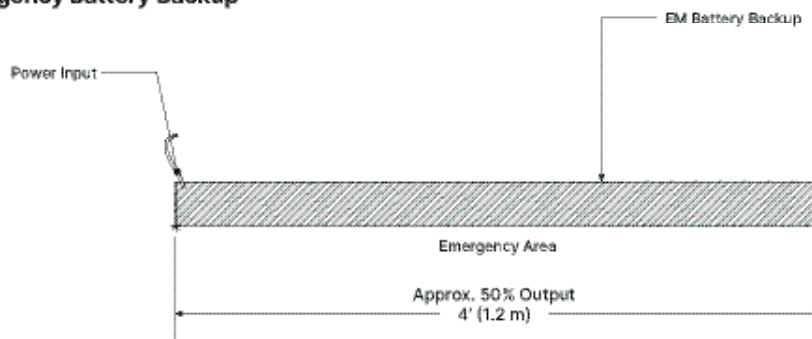

EM Area is Set to 4' (1.2 m) for All Fixture Lengths.
Fixtures Normal Power Maximum Output Level Set at Factory

Battery Power: 10 W
Illumination Time: 90 minutes
Light Output approx 300 lm/ft or 1200-1300 Total Lumens*
Recharge Time: 24 Hours


*Light output may vary based on fixture output level ordered.

OPTIC	BEAM PATTERN						
	DLAM	DBW60	DDA70	DA3015	DA3010	DM55	DN40
Flush Lens	●	●	●	●	●	●	●
Regressed Lens	●	●	●	●	●	●	●
Micro Baffle	●	●	●	●	●	●	●

DIRECT PHOTOMETRICS


Static White Light

DLAM: Lambertian

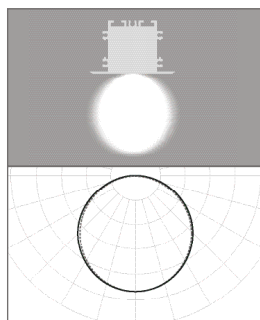


Length 48"
LED HE80
CRI/CCT 80+/3500K
Lumens 3,000
lm/ft 745
Watts 36
W/ft 9
LPW 83

DBW60: Batwing 60°

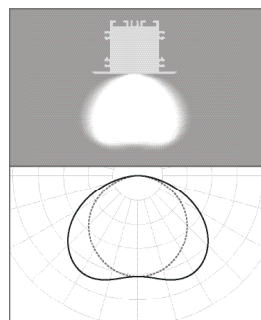


Length 48"
LED HE80
CRI/CCT 80+/3500K
Lumens 3,000
lm/ft 758
Watts 21
W/ft 5.4
LPW 141

DDA70: Double Asymmetric 70°

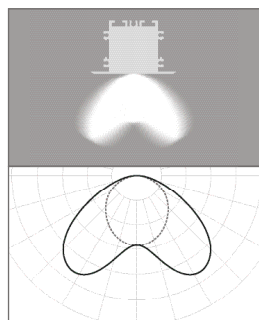


Length 48"
LED HE80
CRI/CCT 80+/3500K
Lumens 3,000
lm/ft 750
Watts 25
W/ft 6.2
LPW 123

DA3015: Asymmetric 30° at 15° Tilt

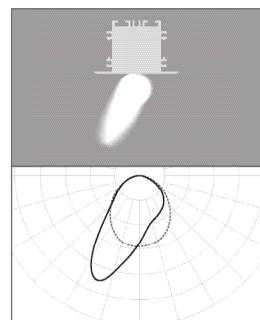


Length 48"
LED HE80
CRI/CCT 80+/3500K
Lumens 3,000
lm/ft 757
Watts 23
W/ft 5.8
LPW 131

DA3010: Asymmetric 30° at 10° Tilt

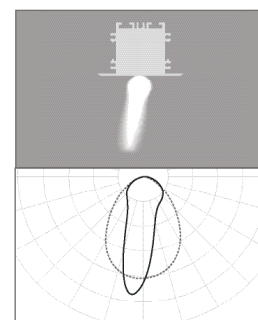


Length 48"
LED HE80
CRI/CCT 80+/3500K
Lumens 3,000
lm/ft 754
Watts 23
W/ft 5.8
LPW 130

DM70: Medium 70°

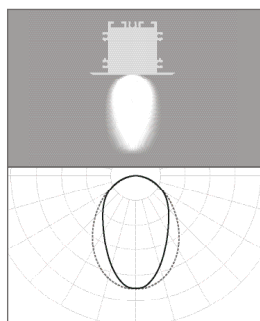

Length 48"
LED HE80
CRI/CCT 80+/3500K
Lumens 3,000
lm/ft 752
Watts 20
W/ft 5
LPW 149

DN40: Narrow 40°

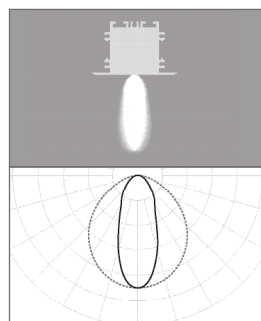

Length 48"
LED HE80
CRI/CCT 80+/3500K
Lumens 3,000
lm/ft 754
Watts 20
W/ft 5
LPW 151

PATENTS & TRADEMARKS



To learn more about our unique technologies, please click or scan the QR Code.

Utility Patents

United States	US11543582, US11520097, US11512466, US11441749, US11396751, US11333822, US11163104, US11156762, US10852466, US10068447, US8953926, US8948564, US8911099, US8876348, US8794812, US8783898, US8761565, US8750671, US8721152, US8619363, US8430548, US8408775, US8249408, US8231256, US8177408, US8033706, US8033674, US7991257, US7914192, US7784954, US7758227, US7722224, US7542635, US7453636, US7453635, US7431489, US7408707, US7278775, US6369944, US6346311, US6123877, US5932342, US5837346, US20220373144, US20220372752, US20220364708, US20220357006, US20220357005, US20220342141, US20220290432, US20220206210A1, US20220171119A1, US20220171115A1, US20220162856A1, US20220162853A1, US20220146063A1, US20220137287, US20210301991A1, US20200355345A1, US20200217071A1, US20220333765A1, US20220228366A1, US20220196906A1, US20220010554A1, US20080043490A1, US20060290253A1, US20060215958A1, US20120321247, US20120250330, US20120099204
Canada	CA2702600, CA2702685, CA2702690
France	FREP0800658
Germany	DEEP0800658
Great Britain	GB2492541, GB2492542, GBEP0800658, GB2492398
Japan	JP03958359
Netherlands	NLEP0800658
Taiwan	FTW360813B
European Patent Organization	EP0843203, EP0843203

Design Patents

United States	USD719282, USD717973, USD669606, USD669608, USD669609, USD669614, USD663056
----------------------	---

The Patent Corporation Treaty

World Intellectual Property Organization	WO2015200268
---	--------------

Trademarks

United States	US6672871, US6397231, US6373493, US6257728, US6190558, US6190559, US6142905, US6114408, US6038234, US6025279, US6060740, US6257729, US5856164, US5734112, US5543304, US5309290, US5309315, US4691124, US4640751
----------------------	---