


# EDGESolo325 Pendant

## 3.25" Edge-Lit Linear LED Pendant Mount

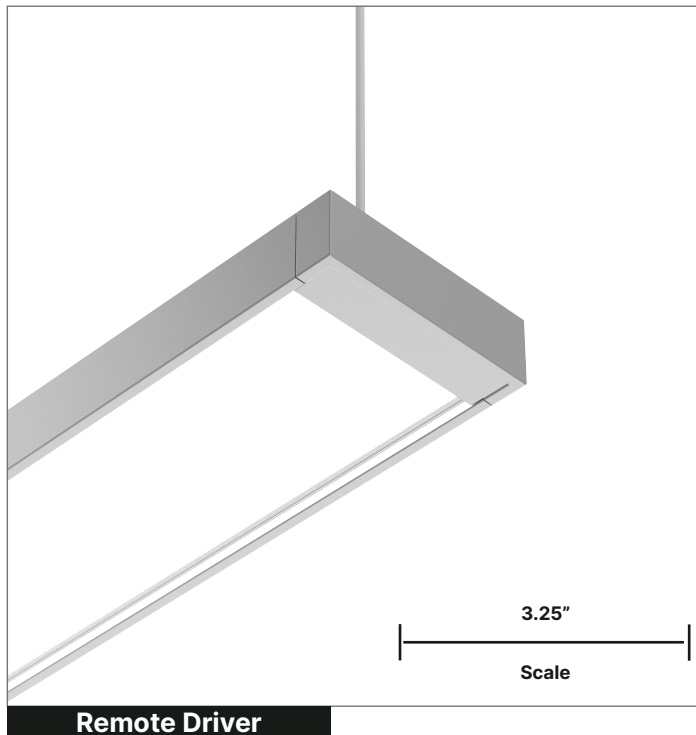

### Features & Benefits

#### Exceptional Performance

3.25" (W) x 1" (H). Up to 1,500 lm/ft, 135 lm/W efficacy

#### Wide Range of LED Selections

Static and Tunable White

#### Designed with Options

Wide choice of SmartOptic® lenses, beam distributions, 80/90/95+ CRI, 2200K to 5000K CCT, and 0-10V, DALI, DMX, and TRIAC dimming

#### Patented Innovations

Fusion® Optix Inside with unique SmartBeam® capabilities

#### Proprietary Optical Components

Provides excellent light distribution and high-transmission

#### Committed to Sustainability

Declare Listed and Red Free List materials

#### Compliance

UL Listed, Dry and Damp Locations

#### 5-Year Warranty

Standard 5-year warranty, 50,000 hours

Designed & Built in  
**BOSTON**

**Declare**



FIXTURE ORDERING

Project Name

Fixture Type

1) FIXTURE DESIGN

PRODUCT	LENGTH		FINISH		END CAP		OPTIC (DIRECT ONLY)	
ESO325-P								
3.25" Edge-Lit	2	2'	MWH	Matte White (RAL9003)	E1	Flat End Cap	OFL	Flush Lens
Linear LED	4	4'	MBK	Matte Black (RAL9005)	E2	Chamfered End Cap	ORL	Regressed Lens
Pendant Mount	6	6'	MGR	Matte Gray (RAL7001)				
	8	8'	CAE	Clear Anodized Effect				
	10	10'	RAL_	Specify RAL#				
	X_	Specify X', Y"						

2) LED LIGHT ENGINE

CRI		CCT		DIRECT BEAM PATTERN		DIRECT OUTPUT		INDIRECT BEAM PATTERN		INDIRECT OUTPUT	
S80	Std. 80 CRI	22	2200K	DLAM	Lambertian	35	350 lm/ft	NN	Not Needed	NN	Not Needed
S90	Std. 90 CRI	27	2700K	DBW65	Batwing 65°	50	500 lm/ft	ILAM	Lambertian	35	350 lm/ft
HE80	High-Eff. 80 CRI	30	3000K	DA5025	Asymmetric 50°	75	750 lm/ft	IBW120	Batwing 120°	50	500 lm/ft
HE90	High-Eff. 90 CRI	35	3500K		at 25° Tilt	100	1,000 lm/ft	IFT150	FlatTop 150°	75	750 lm/ft
HD95	High-Def. 95 CRI	40	4000K	X_	Specify Beam	X_	Specify lm/ft	IA6040	Asymmetric 60° at 40° Tilt	100	1,000 lm/ft
SUN	Full SunLike	50	5000K					IA4560	Asymmetric 45° at 60° Tilt	X_	Specify lm/ft
		X_	Specify CCT					X_	Specify Beam		

3) FIXTURE POWER & CONTROLS

LINE VOLTAGE (DC)		REMOTE DRIVER (POWER)		REMOTE DRIVER BOX <sup>1</sup>		EMERGENCY BACKUP		CONTROL SYSTEM <sup>3</sup>	
UNV	120/277V	FDND	Factory Non-Dimming	NN	Not Needed	NN	Not Needed	NN	Not Needed
347	347V	FD01	Factory 0-10V 1% Dim	RLDB <sup>2</sup>	Remote Linear Driver Box (driver included by default)	EMC	Emergency Circuit	LUT	Lutron
		FD10	Factory 0-10V 10% Dim			EMB	Emergency Battery (10 W — Remote)	COO	Cooper
		FDDA	Factory DALI 0.1% Dim	RX2D <sup>2</sup>	Optional Remote XBox2 Driver, Up to 2 Drivers	X_	Specify Backup	CAS	Casambi
		FDDX	Factory DMX Dim					X_	Specify Control System
		FDTR	Factory TRIAC Dim	RX3D <sup>2</sup>	Optional Remote XBox3 Driver, Up to 3 Drivers				
		LD01	Lutron Hi-Lume 1% Dim						
		LD05	Lutron 5-Series 5% Dim	RX5D <sup>2</sup>	Optional Remote XBox5 Driver, Up to 5 Drivers				
		ED00	eldoLED 0-10V 0.1% Dim						
		ED01	eldoLED 0-10V 1% Dim						
		EDDA	eldoLED DALI 0.1% Dim						
		X_	Specify Driver						

4) FIXTURE MOUNTING & CONNECTIONS

MOUNTING TYPE		CANOPY				POWER CORD	
DJ	Drywall/J-Box Mount	RCWH2	2" Round Canopy, White	SQCWH2	2" Square Canopy, White	S48WH	48" White Cable Kit
T1	9/16" Flat T-Bar Mount	RCBK2	2" Round Canopy, Black	SQCBK2	2" Square Canopy, Black	S48BK	48" Black Cable Kit
T2	9/16" Bolt Slot T-Bar Mount	RCWH5	5" Round Canopy, White	SQCWH5	5" Square Canopy, White	S96WH	96" White Cable Kit
T3	15/16" Flat T-Bar Mount	RCBK5	5" Round Canopy, Black	SQCBK5	5" Square Canopy, Black	S96BK	96" Black Cable Kit


Footnotes: <sup>1</sup> Remote distance is dependent on driver type, up to 100' (30.5 m).    <sup>2</sup> Creates a clean and organized power solution for multiple fixture installations.  
<sup>3</sup> The control system and driver must be compatible.

OPTIC	BEAM PATTERN		
	DLAM	DBW65	DA5025
Flush Lens	●	●	●

## DIRECT PHOTOMETRICS


Static White Light

**DLAM:** Lambertian




**Length** 48"  
**LED** HE80  
**CRI/CCT** 80+/3500K  
**Lumens** 3,000  
**lm/ft** 746  
**Watts** 27  
**W/ft** 6.8  
**LPW** 110

**DBW65:** Batwing 65°



**Length** 48"  
**LED** HE80  
**CRI/CCT** 80+/3500K  
**Lumens** 3,000  
**lm/ft** 743  
**Watts** 27  
**W/ft** 6.8  
**LPW** 109

**DA5025:** Asymmetric 50° at 25° Tilt




**Length** 48"  
**LED** HE80  
**CRI/CCT** 80+/3500K  
**Lumens** 3,000  
**lm/ft** 738  
**Watts** 10.5  
**W/ft** 5.3  
**LPW** 141

## INDIRECT PHOTOMETRICS


Static White Light

**ILAM:** Lambertian




**Length** 48"  
**LED** HE80  
**CRI/CCT** 80+/3500K  
**Lumens** 4,000  
**lm/ft** 1,000  
**Watts** 28  
**W/ft** 7  
**LPW** 150

**IBW120:** Batwing 120°

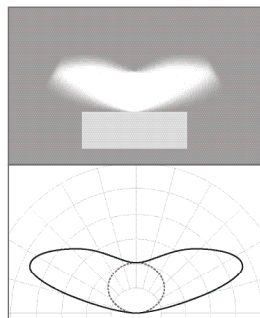


**Length** 48"  
**LED** HE80  
**CRI/CCT** 80+/3500K  
**Lumens** 4,000  
**lm/ft** 1,017  
**Watts** 25  
**W/ft** 6.3  
**LPW** 162

**IFT150:** FlatTop 150°




**Length** 48"  
**LED** HE80  
**CRI/CCT** 80+/3500K  
**Lumens** 4,000  
**lm/ft** 1,004  
**Watts** 26  
**W/ft** 6.5  
**LPW** 155

**IA6040:** Asymmetric 60° at 40° Tilt

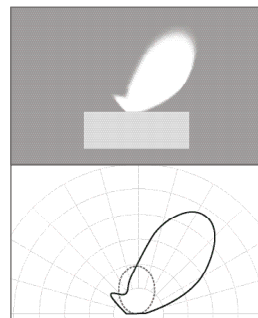

**Length** 48"  
**LED** HE80  
**CRI/CCT** 80+/3500K  
**Lumens** 4,000  
**lm/ft** 991  
**Watts** 28  
**W/ft** 7  
**LPW** 143


**IA4560:** Asymmetric 45° at 60° Tilt



**Length** 48"  
**LED** HE80  
**CRI/CCT** 80+/3500K  
**Lumens** 4,000  
**lm/ft** 991  
**Watts** 28  
**W/ft** 7  
**LPW** 143

FIXTURE DESIGN

Dimensions

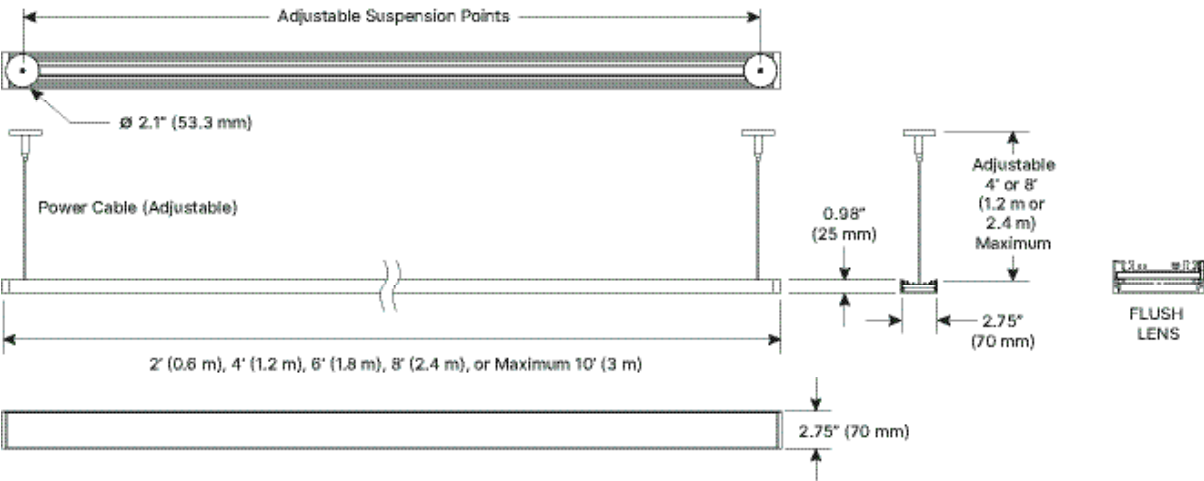


To download BIM (Revit) Files, please click or scan the QR Code.


Length


Length Options2', 4', 6', 8', 10' nominal, or custom within 3"


Finish


Housing Colors (Matte Finish)

  
White (RAL9003)

  
Black (RAL9005)

  
Gray (RAL7001)

  
Clear Anodized Effect

  
Custom RAL

Housing Material6063-T5 extruded, recycled aluminum

Mounting BracketsSheet metal

End Cap

End Cap OptionChamfered

End Cap MaterialMachined or cast aluminum

Optic

Lens OptionFlush


Lens MaterialPatented SmartOptics® made from Acrylic (PMMA)

Voltage


Fixture Voltage (AC)120–277 VAC and 347 VAC, 50/60 Hz

## LED SELECTION GUIDE


**S80: Standard 80+ CRI**

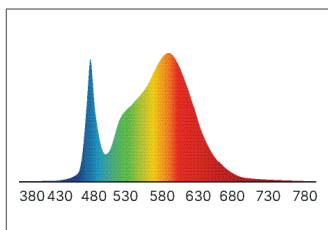


**S90: Standard 90+ CRI**




**HE80: High-Efficiency 80+ CRI**




**HE90: High-Efficiency 90+ CRI**

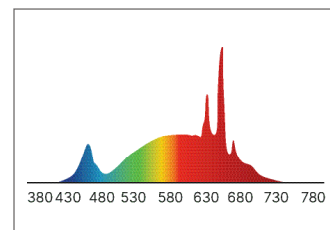


**HD95: High-Definition 95+ CRI**

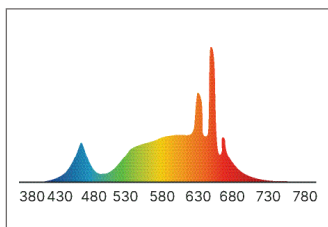


**SUN: Full Spectrum "SunLike"**



**HCD: Human Centric Day**



**HCN: Human Centric Night**

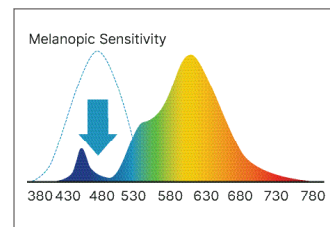

### Static White Light (LED Light Engine Only)

CODE	DESCRIPTION	TYPICAL LED DATA							
		CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	M/P Ratio	LPW
S80	Standard 80 CRI	3500K	82.5	7.8	84	96.7	82.5	0.51	190
S90	Standard 90 CRI	3500K	91	54.3	89.3	98.9	89.2	0.55	175
HE80	High Efficiency 80 CRI	3500K	82.1	5.9	83	94.2	81.2	0.52	210
HE90	High Efficiency 90 CRI	3500K	92.2	90	90.7	103.8	92.1	0.56	190
HD95	High Definition 95 CRI	3500K	97.1	95	–	–	–	0.70	163
SUN	Full Spectrum SunLike®	3500K	95	85	–	–	–	–	130
HCD	Human Centric Day	4000K	83	95	–	–	–	0.92	155
HCN	Human Centric Night	2700K	80	–	–	–	–	0.44	134

### LPW Efficacy Conversion Chart

CODE	CCT SELECTED							
	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
S80	–	0.91	0.96	1.00	1.04	1.11	1.11	1.11
S90	–	0.91	0.96	1.00	1.04	1.11	1.11	1.11
HE80	–	0.96	0.99	1.00	1.03	1.04	1.03	1.03
HE90	–	0.91	0.96	1.00	1.04	1.11	N/A	N/A
HD95	–	0.91	0.96	1.00	1.04	1.11	1.03	1.04
SUN95	–	0.90	0.92	1.00	1.01	1.07	1.04	1.05
HCD	–	N/A	0.96	1.00	1.04	1.04	1.04	1.04
HCN	–	0.87	0.96	1.00	1.04	N/A	N/A	N/A

## SMARTBEAM® TECHNOLOGY

### The Ultimate Control of Lighting Distributions

SmartBeam makes it easy to specify the exact light required for any architectural space. Available in every XICO product; it is now possible to create truly tailored and engaging lighting that transform spaces, improves visual comfort, and saves energy.

To learn more about our SmartBeam Technology, please click or scan the QR Code.



## FIXTURE POWER & CONTROLS

### Voltage

**LED Driver** Factory Selected, 36–39V Constant Current

### Emergency Backup

**Backup Types** Emergency Circuit, Emergency Battery (Remote), and other emergency backups are available

**Wiring** Typically the Emergency Backup is wired to 48" sections

**Power** 10 W

**Illumination Time** 90 minutes

### Partners



### Control Systems

**Other** Remote Drivers (Sold Separately)  
Factory Non-Dimming, Factory 0–10V 1% Dim, Factory 0–10V 10% Dim, Factory DALI 0.1% Dim, Factory DMX Dim, Factory TRIAC Dim, eldoLED 0–10V 0.1% Dim, eldoLED 0–10V 1% Dim, eldoLED DALI 0.1% Dim, and other drivers are available, consult factory (not all integral)

**Lutron** Hi-Lume 1% Dimming and 5-Series 5% Dimming


**Cooper** Compatible driver

**Casambi (wireless)** Compatible driver

### XBox

**Remote Driver Boxes (Optional)** To create a clean and organized power solution for multiple fixture installations see our Xbox Specification Guide. Reach out to a XICO Sales Representative to discuss your project's needs.



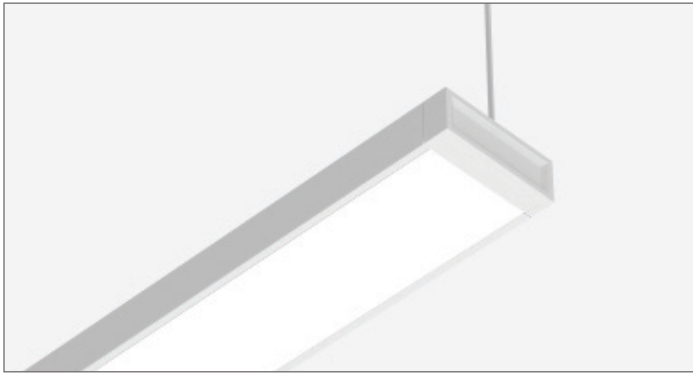

Flush Lens

## FIXTURE MOUNTING & CONNECTIONS

### Mounting Type

#### T-Bar Mount

Installs into a ceiling grid system and mount on to, or replace, typical T-Bar elements. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements.

#### Drywall/J-Box Mount

Installs onto a surface via a junction box. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements.

### Canopy

#### Canopy Sizes & Shapes

2" and 5", Round and Square

#### Canopy Colors



White (RAL9003) Black (RAL9005)

#### Canopy Material

Powder Coated Steel

### Power Cords

#### 48" Cable Kit

White and Black

#### 96" Cable Kit


White and Black

### Mounting Options


Typically suspended at a distance of between 24" and 72". Supplied hardware includes:

- Cable length adjustable at fixture level
- Standard 96" cord length or custom length
- Internal brackets to eliminate light leakage at joints


DJ - Drywall/J-Box Mount

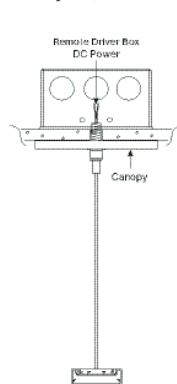


T1 - 9/16" Flat T-Bar Mount

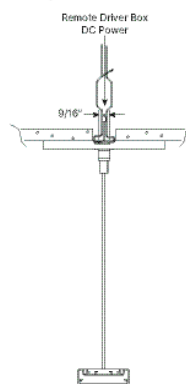


T2 - 9/16" Bolt Slot T-Bar Mount

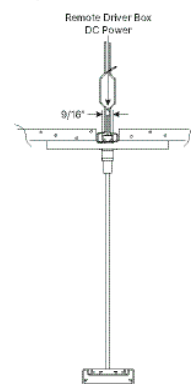

T3 - 15/16" Flat T-Bar Mount

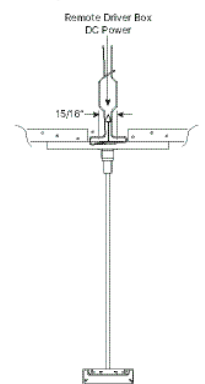

## STANDARDS & CERTIFICATIONS

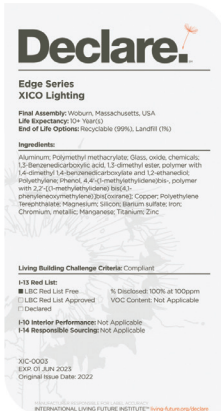

### Declare Listed

Declare labels provide a quick and reliable way to make choices about the environmental footprint and safety of the product. Declare is internationally recognized and the labels can be found on the product, product packaging, or company website. Visit [xicoled.com](http://xicoled.com) for Declare Listed details.



### Red List Free

An industry standard certification for LED lighting products based on the International Living Future Institute (ILFI). These products only use materials based on the “Red List of Toxic Chemicals” (a list of chemicals and materials known to be hazardous to people and/or the Earth) that are safe, healthy, and environmentally sustainable.

## Certifications

### Compliance

BAA & TAA compliant in-house manufacturing in Boston, MA with North American supply chain

### Certifications



### Sustainability

Declare Listed and Red List Free

### Packaging

Low carbon, environmentally conscious packaging and shipping methods

## Environmental Suitability

### IP Rating

Suitable for Dry and Damp Locations, indoor use only

### Recyclable

SmartOptics and all powder coated and anodized parts are fully recyclable at end of life

## Reliability

### Manufacturing

All XICO products and associated optics and LED engines are assembled at our factory in Woburn, MA

### Quality Assurance

Each product is engineered reliability and quality assurance tested

## Warranty & Terms

### 5-YR Warranty




### Business Terms



For details on our warranty and business terms, please click or scan the QR Code.



## PATENTS &amp; TRADEMARKS



To learn more about our unique technologies, please click or scan the QR Code.

## Utility Patents

<b>United States</b>	US11543582, US11520097, US11512466, US11441749, US11396751, US11333822, US11163104, US11156762, US10852466, US10068447, US8953926, US8948564, US8911099, US8876348, US8794812, US8783898, US8761565, US8750671, US8721152, US8619363, US8430548, US8408775, US8249408, US8231256, US8177408, US8033706, US8033674, US7991257, US7914192, US7784954, US7758227, US7722224, US7542635, US7453636, US7453635, US7431489, US7408707, US7278775, US6369944, US6346311, US6123877, US5932342, US5837346, US20220373144, US20220372752, US20220364708, US20220357006, US20220357005, US20220342141, US20220290432, US20220206210A1, US20220171119A1, US20220171115A1, US20220162856A1, US20220162853A1, US20220146063A1, US20220137287, US20210301991A1, US20200355345A1, US20200217071A1, US20220333765A1, US20220228366A1, US20220196906A1, US20220010554A1, US20080043490A1, US20060290253A1, US20060215958A1, US20120321247, US20120250330, US20120099204
<b>Canada</b>	CA2702600, CA2702685, CA2702690
<b>France</b>	FREP0800658
<b>Germany</b>	DEEP0800658
<b>Great Britain</b>	GB2492541, GB2492542, GBEP0800658, GB2492398
<b>Japan</b>	JP03958359
<b>Netherlands</b>	NLEP0800658
<b>Taiwan</b>	FTW360813B
<b>European Patent Organization</b>	EP0843203, EP0843203

## Design Patents

<b>United States</b>	USD719282, USD717973, USD669606, USD669608, USD669609, USD669614, USD663056
----------------------	---

## The Patent Corporation Treaty

<b>World Intellectual Property Organization</b>	WO2015200268
---	--------------

## Trademarks

<b>United States</b>	US6672871, US6397231, US6373493, US6257728, US6190558, US6190559, US6142905, US6114408, US6038234, US6025279, US6060740, US6257729, US5856164, US5734112, US5543304, US5309290, US5309315, US4691124, US4640751
----------------------	---