


# EDGESolo200 Wall

Direct, Indirect, Direct / Indirect | Standard Lengths



Project Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

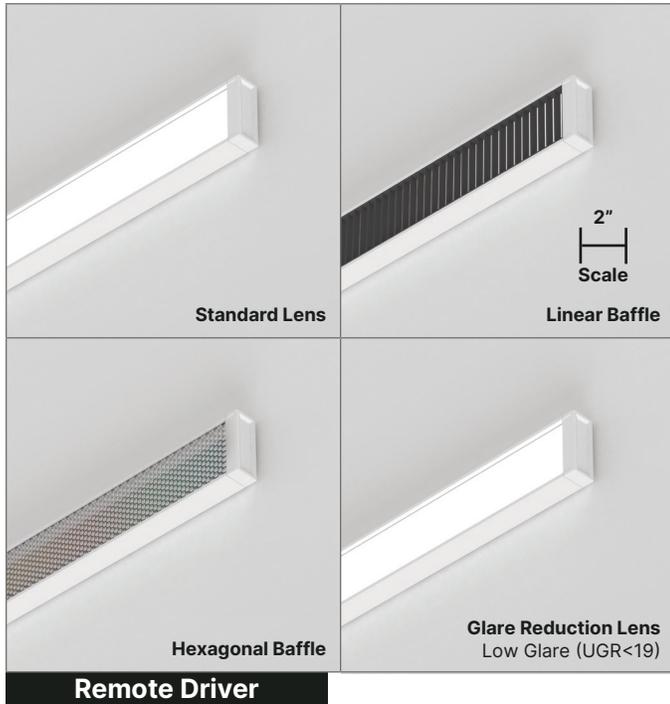

## DESCRIPTION

### 2" Edge-Lit Linear LED Wall Mount

EDGESolo200 Wall is an innovative low-profile wall-mounted LED luminaire designed to provide the perfect direct light. EDGE products all provide best-in-class efficiency and beam control options. EDGESolo200 Wall is specification-grade with high lumen per foot, high CRI, and circadian options. EDGESolo 200 Wall incorporates an engineered LED light engine with fully customizable choices for lumen output, CCT, and CRI.

## FEATURES & BENEFITS

### Exceptional Performance

Up to 1,000 lm/ft, 135 lm/W efficacy. Low Glare (UGR<19) WELL Building Standard™ and LEED certified when specified less than 350 lm/ft.

### LED Selections

Static

### Designed with Options

Wide choice of SmartOptic® lenses, beam distributions, 80/90/95+ CRI, 2700K to 6500K CCT, and 0-10V, DALI, DMX, and TRIAC dimming

### Patented Innovations

Fusion® Optix Inside with unique SmartBeam® capabilities

### Proprietary Optical Components

Provides excellent light distribution and high-transmission

### Committed to Sustainability

Declare Listed and Red Free List materials

### Compliance

UL Listed, Dry and Damp Locations

### 5-Year Warranty


Standard 5-year warranty, 50,000 hours

## LIGHTING CONFIGURATIONS

Direct

Indirect

Direct / Indirect

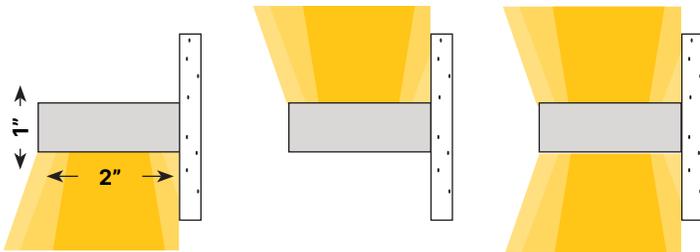

Designed & Built in **BOSTON**

## FIXTURE ORDERING

Project Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

### 1) FIXTURE DESIGN

PRODUCT	FIXTURE LENGTH	FINISH	END CAP STYLE
<b>ESO200-W</b> 2" Edge-Lit Linear LED Wall Mount	<b>2</b> - 2 ft <b>4</b> - 4 ft <b>6</b> - 6 ft <b>8</b> - 8 ft <b>X_</b> - Specify Ft', In"	<b>Powder Coated</b> <b>PMW</b> - Matte White <b>PMB</b> - Matte Black <b>PMG</b> - Matte Gray <b>PRAL_</b> - Specify RAL #	<b>E1</b> - Flat End Cap <b>E2</b> - Chamfered End Cap
	Custom fixtures are available in 3" increments beyond standard lengths.	<b>Anodized</b> <b>ACL</b> - Clear Anodized <b>ACU_</b> - Custom Anodized #	

### 2) LED LIGHT ENGINE

CRI	CCT	OPTIC (DIRECT ONLY)	DIRECT BEAM PATTERN	DIRECT OUTPUT
<b>80</b> - Std. 80 CRI <b>90</b> - Std. 90 CRI <b>95</b> - High-Def. 95 CRI <b>SUN</b> - Full SunLike	<b>27</b> - 2700K <b>30</b> - 3000K <b>35</b> - 3500K <b>40</b> - 4000K <b>X_</b> - Specify CCT	<b>OSL</b> - Standard Lens <b>WLB</b> - White Linear Baffle <sup>1</sup> <b>BLB</b> - Black Linear Baffle <sup>1</sup> <b>WHB</b> - White Hexagonal Baffle <sup>1</sup> <b>BHB</b> - Black Hexagonal Baffle <sup>1</sup> <b>CHB</b> - Chrome Hexagonal Baffle <sup>1</sup>	<b>NN</b> - Not Needed <b>DLAM</b> - Lambertian <b>DBW65</b> - Batwing 65° <b>DA5025</b> - Asym 50° at 25° Tilt <b>X_</b> - Specify Beam <sup>2</sup>	<b>NN</b> - Not Needed <b>35</b> - 350 lm/ft <b>50</b> - 500 lm/ft <b>75</b> - 750 lm/ft <b>100</b> - 1,000 lm/ft <b>X_</b> - Specify lm/ft
		<b>GRL</b> - Glare Reduction Lens (LEED certified and meets the WELL Building Standard™ with output less than 350 lm/ft)	<b>DLAM</b> - Lambertian	
INDIRECT BEAM PATTERN	INDIRECT OUTPUT	CIRCUIT		
		<b>1CH</b> - 1 Circuit (Standard) <b>2CH</b> - Bi-Directional 2 Circuit (Optional)		
<b>NN</b> - Not Needed <b>ILAM</b> - Lambertian <b>IBW120</b> - Batwing 120° <b>IFT150</b> - FlatTop 150° <b>IA6040</b> - Asym 60° at 40° Tilt <b>IA4560</b> - Asym 45° at 60° Tilt <b>X_</b> - Specify Beam <sup>2</sup>	<b>NN</b> - Not Needed <b>35</b> - 350 lm/ft <b>50</b> - 500 lm/ft <b>75</b> - 750 lm/ft <b>100</b> - 1,000 lm/ft <b>X_</b> - Specify lm/ft			

### 3) FIXTURE POWER & CONTROLS

LINE VOLTAGE (DC)	REMOTE DRIVER (POWER) <sup>3</sup>
<b>UNV</b> - 120/277V <b>347</b> - 347V	<b>FDND</b> - Factory Non-Dimming <b>FD00</b> - Factory 0-10V 0.1% Dim <b>FD01</b> - Factory 0-10V 1% Dim <b>FD10</b> - Factory 0-10V 10% Dim <b>FDDA</b> - Factory DALI 0.1% Dim <b>FDDX</b> - Factory DMX Dim <b>FDTR</b> - Factory TRIAC Dim <b>LD01</b> - Lutron Hi-Lume 1% Dim <b>X_</b> - Specify Driver
	Footnotes: <sup>1</sup> Baffle lens options reduce efficacy. Contact factory for lm/W data. <sup>2</sup> Contact factory about custom beam options. <sup>3</sup> Standard driver box is included


4) FIXTURE MOUNTING & CONNECTIONS	
STYLE	MOUNTING HARDWARE
<b>FM</b> - Flush Mount <b>SM</b> - Shelf Mount	<b>SWMB</b> - Sttainless Steel Wall Mounting Bracket

OPTIONAL	
EMERGENCY BACKUP	WIRELESS MODULE
<b>EMC</b> - Emergency Circuit <b>EMB</b> - Emergency Battery (10W — Remote) <b>X_</b> - Specify Backup  Specify requirements at time of order.	<b>WCN</b> - Wireless Communication Node (Connected to LED Driver In-Fixture or In-Driver Box) <b>PIR</b> - Wireless Communication Node + PIR Sensor (Standard Lens for Low Bay < 10') <b>MW</b> - Wireless Communication Node + MW Sensor (Standard for Low Bay < 10') <b>X_</b> - Other – Specify Embedded Component or Specific Non-Standard Sensor Detection Range


## DIMENSIONS & INSTALLATION

### Dimensions


Standard Lens



Baffle Lens



Glare Reduction Lens



### Standard Fixtures



Lens Length / Fixture Length


### Mounting Type

#### Wall Mount


Installs onto wall. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements.

### Mounting Options

Shelf Mount

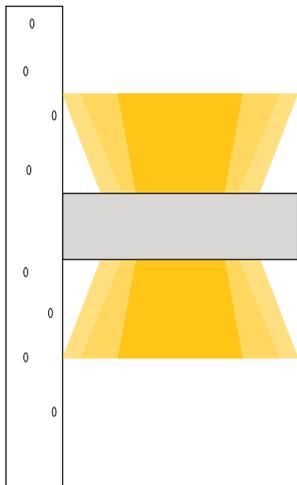

Flush Mount

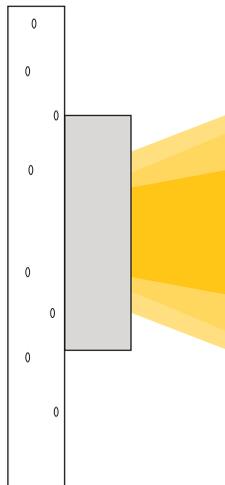

## SMARTBEAM® TECHNOLOGY


### The Ultimate Control of Lighting Distributions

SmartBeam makes it easy to specify the exact light required for any architectural space. Available in every XICO product; it is now possible to create truly tailored and engaging lighting that transform spaces, improves visual comfort, and saves energy.

To learn more about our SmartBeam Technology, please click or scan the QR Code.




### Direct Optics Choices

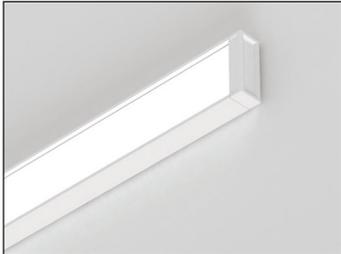


SL - Flush Lens



LB - Linear Baffle

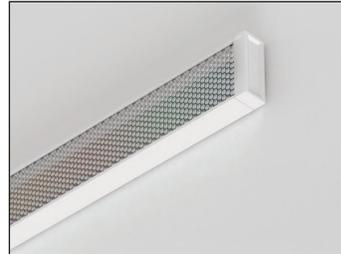

HB - Hexagonal Baffle

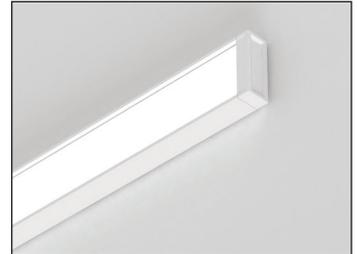

GRL - Glare Reduction Lens

DIRECT OPTICS	BEAM PATTERN		
	DLAM	DBW65	DA5025
Standard Lens	■	■	■
Linear Baffle	■	■	■
Hexagonal Baffle	■	■	■
Glare Reduction Lens	■		

### LPW Efficacy Conversion Chart

CODE	CCT SELECTED							
	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
80	-	0.91	0.96	1.00	1.04	1.11	1.11	1.11
90	-	0.91	0.96	1.00	1.04	1.11	1.11	1.11
95	-	0.91	0.96	1.00	1.04	1.11	1.03	1.04
SUN	-	0.90	0.92	1.00	1.01	1.07	1.04	1.05

### LPW Performance

	DIRECT		
	DLAM	DBW65	DA5025
LM/W	110	109	141

	INDIRECT				
	ILAM	IBW120	IFT150	IA6040	IA4560
LM/W	150	162	155	143	143

$$LM/W = \frac{\left( \begin{matrix} \text{DIRECT} \\ \text{LM/FT} \end{matrix} + \begin{matrix} \text{INDIRECT} \\ \text{LM/FT} \end{matrix} \right)}{\left( \begin{matrix} \text{DIRECT} \\ \text{W/FT} \end{matrix} + \begin{matrix} \text{INDIRECT} \\ \text{W/FT} \end{matrix} \right)}$$

## DIRECT PHOTOMETRICS




Static White Light

48" Length, 80+/3500K CRI/CCT, 3,000 Lumens

**DLAM:** Lambertian

**DBW65:** Batwing 65°

**DA5025:** Asymmetric 50° at 25° Tilt



LM/FT	W/FT	LM/W
350	3.2	109.4
500	4.5	111.1
750	6.8	110
1000	9.1	109.9

LM/FT	W/FT	LM/W
350	3.2	109.4
500	4.5	111.1
750	6.8	109
1000	9.1	109.9

LM/FT	W/FT	LM/W
350	2.5	140
500	3.5	142.9
750	5.3	141
1000	7.1	140.8

COMPATIBLE OPTIC			
FLUSH LENS	LINEAR BAFFLE	HEXAGONAL BAFFLE	GLARE REDUCTION LENS
■	■	■	■

## OPTICS CONFIGURATIONS

Standard Lens	Linear Baffle	Hexagonal Baffle	Glare Reduction Lens
White Standard Lens <b>OSL</b>	White Linear Baffle <b>WLB</b>	White Hexagonal Baffle <b>WHB</b>	White Glare Reduction Lens <b>GRL</b>
	Black Linear Baffle <b>BLB</b>	Black Hexagonal Baffle <b>BHB</b>	
		Chrome Hexagonal Baffle <b>CHB</b>	

## WELL Building Standard™ and LEED Certification

EDGESolo products are LEED certified and meet the WELL Building Standard™ for low glare (UGR <19) when specified with a low-glare lens option and configured at or below maximum lumen-per-foot output. Refer to the chart below for qualifying configurations and performance data.


LM/FT	EDGESolo			
	ESO200	ESO275	ESO325	ESO525
350				
400				
500				
750				

## INDIRECT PHOTOMETRICS

Static White Light


48" Length, 80+/3500K CRI/CCT, 4,000 Lumens

**ILAM:** Lambertian




LM/FT	W/FT	LM/W
350	2.3	152.2
500	3.3	151.5
750	5	150
1000	6.7	149.3

**IBW120:** Batwing 120°




LM/FT	W/FT	LM/W
350	2.1	166.7
500	3.1	161.3
750	4.6	162
1000	6.1	163.9

**IFT150:** FlatTop 150°




LM/FT	W/FT	LM/W
350	2.2	159.1
500	3.2	156.3
750	4.8	155
1000	6.4	156.3

**IA6040:** Asymmetric 60° at 40° Tilt

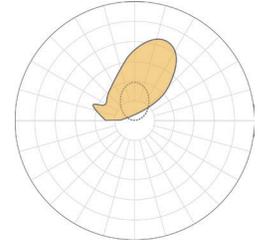

LM/FT	W/FT	LM/W
350	2.4	145.8
500	3.5	142.9
750	5.2	143
1000	6.9	144.9


**IA4560:** Asymmetric 45° at 60° Tilt




LM/FT	W/FT	LM/W
350	2.4	145.8
500	3.5	142.9
750	5.2	143
1000	6.9	144.9

## LED OPTIONS


**80: Standard 80+ CRI**

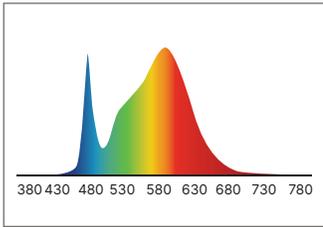


**90: Standard 90+ CRI**

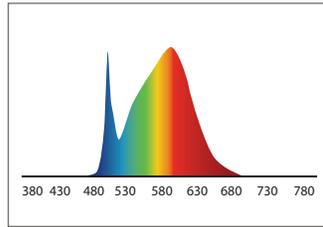

**95: High-Definition 95+CRI**

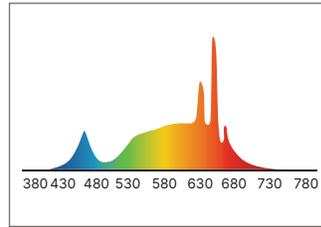

**SUN: Full Spectrum "SunLike"**

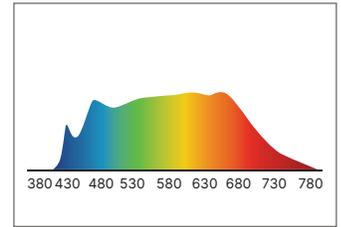

CODE	DESCRIPTION	TYPICAL LED DATA							
		CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	M/P Ratio	LPW
80	Standard 80 CRI	3500K	82.5	7.8	84	96.7	82.5	0.51	190
90	Standard 90 CRI	3500K	91	54.3	89.3	98.9	89.2	0.55	175
95	High Definition 95 CRI	3500K	97.1	95	-	-	-	0.70	163
SUN	Full Spectrum SunLike®	3500K	95	85	-	-	-	-	130

## POWER & CONTROLS

### Voltage

#### Fixture Voltage (AC)

120–277 VAC  
347 VAC, 50/60 Hz

#### Power Location

Remote

#### LED Driver

Factory Selected, 36–39V Constant Current

### Drivers

**FDND** - Factory Non-Dimming  
**FD00** - Factory 0-10V 0.1% Dim  
**FD01** - Factory 0-10V 1% Dim  
**FD10** - Factory 0-10V 10% Dim  
**FDDA** - Factory DALI 0.1% Dim  
**FDDX** - Factory DMX Dim  
**FDTR** - Factory TRIAC Dim  
**LD01** - Lutron Hi-Lume 1% Dim  
**X\_** - Specify Driver

### Emergency Backup (Optional)

**EMC** - Emergency Circuit  
**EMB** - Emergency Battery  
 (10 W — Remote)  
**X\_** - Specify Backup

#### Power

10 W

#### Illumination Time

90 minutes

### IP Rating

Suitable for Dry and Damp Locations,  
indoor use only

### XBox

#### Remote Driver Boxes (Optional)

To create a clean and organized power solution for multiple fixture installations see our XBox Specification Guide. Reach out to a XICO Sales Representative to discuss your projects needs.

### Compatible Control Options



## TECHNICAL SPECIFICATIONS

### Finishes & Design Options

#### Powder Coated Housing Colors (Matte Finish)

- White (RAL9003)
- Black (RAL9005)
- Gray (RAL7001)
- Custom RAL



#### Housing Material

6063-T5 extruded, recycled aluminum

#### Mounting Brackets

Sheet Metal

#### End Cap Material

6063-T5 extruded, recycled aluminum

#### Lens Options and Material

Standard, Baffle and Glare Reduction lens options with Patented SmartOptics® made from Acrylic (PMMA)

### Standards & Certifications

#### Sustainability

Low carbon, environmentally conscious packaging and shipping methods

#### Compliance

BABAA & TAA compliant in-house manufacturing in Boston, MA with North American supply chain



#### Certifications



#### Declare Listed and Red List Free

Low carbon, environmentally conscious packaging and shipping methods

#### Recyclable

SmartOptics and all powder coated and anodized parts are fully recyclable at end of life

#### Manufacturing

All XICO products and associated optics and LED engines are assembled at our factory in Woburn, MA

#### Quality Assurance

Each product is engineered for reliability and tested for quality assurance

### Declare.

Nano Series  
XICO Lighting

Final Assembly: Woburn, MA, USA  
Life Span: 10+ Years  
End of Life Options: Recyclable (99%)

**Ingredients:**  
Aluminum, Glass, oxides, chemicals, Polymethyl methacrylate, Phenol, 4,4'-[1,1-dimethylol-4,4'-oxybis(2-hydroxyphenyl)]methane bis(4-phenyleneoxy)ethylene[2,2-bis(4-phenyleneoxy)propane], 1,3-diphenyl-2-isocyanate, 1,4-dimethyl-1,4-bisoxane-2,5-dione, 1,2-ethanediol, Polyethylene Glycol, Polyethylene Terephthalate, Barium sulfate, Magnesium, Silicon, Phosphoric acid, di-nitrophenyl ether, Iron, Silver and Silver, di-Nitro Chromium, metallic Gold, Manganese, Titanium, Zinc, Nickel, Inertial

### Declare Listed

At Xico Lighting, we are committed to transparency and sustainability. That's why all our products are Declare listed, providing clear insights into their environmental footprint and safety. Look for these internationally recognized labels on Xico products, packaging, or at [xicoled.com/declare](http://xicoled.com/declare).



### Red List Free

Xico Lighting is dedicated to creating safe, sustainable solutions. All our products are Red List Free, meeting the highest industry standards for healthy and environmentally responsible materials as defined by the International Living Future Institute (ILFI). Learn more at [xicoled.com/declare](http://xicoled.com/declare).

### Quick Links

#### 5-YR Warranty



#### Business Terms



#### Patents & Trademarks



#### SmartBeam



#### Revit Files

