


NANOSlot Recessed


Direct | Standard Lengths

Project Name _____

Fixture Type _____

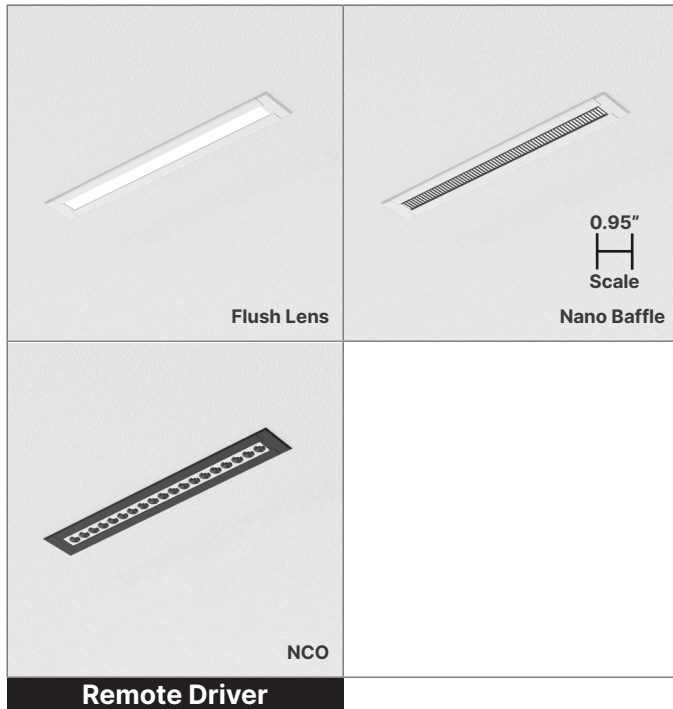

LIGHTING CONFIGURATIONS



XICO®

DESCRIPTION

1" Compact Linear LED Drywall Mount

NANOSlot is 0.95" recessed slot LED linear light fixture, bringing SmartBeam® capabilities to a graphic scale that complements architectural space. NANOSlot has drywall and custom configuration mounting options for ceiling systems. The NANOSlot range is designed to be specification-grade with high lumen per foot, high CRI, and circadian options.

FEATURES & BENEFITS

Exceptional Performance

Up to 1,000 lm/ft, 135 lm/W efficacy

Wide Range of LED Selections

Static, Tunable White, and Dim-to-Warm

Designed with Options

Wide choice of SmartOptic® lenses, beam distributions, 80/90/95+ CRI, 2700K to 6500K CCT, and 0-10V, DALI, DMX, and TRIAC dimming

Patented Innovations

Fusion® Optix Inside with unique SmartBeam® capabilities

Proprietary Optical Components

Provides excellent light distribution and high-transmission

Committed to Sustainability

Declare Listed and Red Free List materials

Compliance

UL Listed, Dry and Damp Locations

5-Year Warranty

Standard 5-year warranty, 50,000 hours

Declare



bios



Designed & Built in
BOSTON

FIXTURE ORDERING

Project Name _____

Fixture Type _____

1) FIXTURE DESIGN

PRODUCT	FIXTURE LENGTH	FINISH
NSL95-RD 1" Linear LED Drywall Mount	2 - 2 ft 4 - 4 ft 6 - 6 ft 8 - 8 ft X_ - Specify Ft', In" Custom fixtures are available in 3" increments beyond standard lengths.	Powder Coated PMW - Matte White PMB - Matte Black PMG - Matte Gray PRAL_ - Specify RAL # Anodized ACL - Clear Anodized ACU_ - Custom Anodized #

2) LED LIGHT ENGINE

CRI	CCT	OPTIC (DIRECT ONLY)	DIRECT BEAM PATTERN	DIRECT OUTPUT
80 - Std. 80 CRI 90 - Std. 90 CRI 95 - High-Def. 95 CRI SUN - Full SunLike	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K XD - Dim-to-Warm ¹ XT - Tunable ¹ X_ - Specify CCT Specify Dim-to-Warm and Tunable between 2700K-6500K.	OFL - Flush Lens ONBW - Nano Baffle, White ONBB - Nano Baffle, Black	NN - Not Needed DLAM - Lambertian DBW60 - Batwing 60° DDA70 - Double Asym 70° DA5025 - Asym 50° at 25° Tilt DA4005 - Asym 40° at 5° Tilt DM55 - Medium 55° DN40 - Narrow 40° X_ - Specify Beam ¹	NN - Not Needed 35 - 350 lm/ft 50 - 500 lm/ft 75 - 750 lm/ft 100 - 1,000 lm/ft X_ - Specify lm/ft
	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	OSNCOW - Square NCO, White OSNCOB - Square NCO, Black ORNCOW - Round NCO, White ORNCOB - Round NCO, Black ORNCOG - Round NCO, Graphite	DS45 - Nano Cavity Optics Spot 45° DS35 - Nano Cavity Optics Spot 35° DS25 - Nano Cavity Optics Spot 25°	

3) FIXTURE POWER & CONTROLS

LINE VOLTAGE (DC)	DRIVER LOCATION	DRIVER (POWER) ²	
UNV - 120/277V 347 - 347V	RD - Remote Driver	FDND - Factory Non-Dimming FD00 - Factory 0-10V 0.1% Dim FD01 - Factory 0-10V 1% Dim FD10 - Factory 0-10V 10% Dim FDDA - Factory DALI 0.1% Dim FDDX - Factory DMX Dim FDTR - Factory TRIAC Dim LD01 - Lutron Hi-Lume 1% Dim X_ - Specify Driver	Footnotes: ¹ Contact factory about custom beam options. ² Standard driver box is included

FIXTURE ORDERING

Project Name _____ Fixture Type _____

4) FIXTURE MOUNTING

MOUNTING TYPE

DK - Drywall Kit
X_ - Specify Mounting Type

OPTIONAL

EMERGENCY BACKUP



EMC - Emergency Circuit
EMB - Emergency Battery
 (10 W — Remote)
X_ - Specify Backup
 Specify requirements at time of order.

WIRELESS MODULE

WCN - Wireless Communication Node (Connected to LED Driver In-Fixture or In-Driver Box)
PIR - Wireless Communication Node + PIR Sensor (Standard Lens for Low Bay < 10')
MW - Wireless Communication Node + MW Sensor (Standard for Low Bay < 10')
X_ - Other – Specify Embedded Component or Specific Non-Standard Sensor Detection Range

DIMENSIONS & INSTALLATION

Dimensions

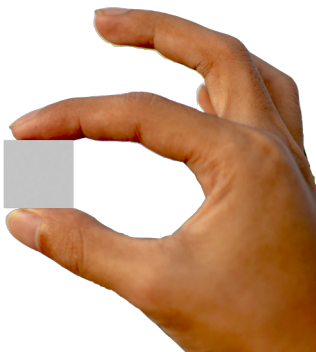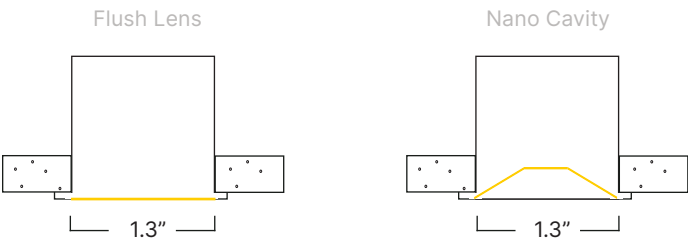

Standard Fixtures

2ft	23.05" / 23.4"
4ft	47.05" / 47.4"
6ft	71.05" / 71.4"
8ft	95.05" / 95.4"


Lens Length / Fixture Length

Mounting Type

Drywall Mount

Installs onto a drywall surface. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements.

Mounting Option



DK - Drywall Kit

SMARTBEAM® TECHNOLOGY


The Ultimate Control of Lighting Distributions

SmartBeam makes it easy to specify the exact light required for any architectural space. Available in every XICO product; it is now possible to create truly tailored and engaging lighting that transform spaces, improves visual comfort, and saves energy.


To learn more about our SmartBeam Technology, please click or scan the QR Code.




Direct Optics Choices



FL - Flush Lens



NB - Nano Baffle



NCO - Nano Cavity Optics

DIRECT OPTICS	BEAM PATTERN									
	DLAM	DBW60	DDA70	DA5025	DA4005	DM55	DN40	DS45	DS35	DS25
Flush Lens	■	■	■	■	■	■	■			
Nano Baffle	■	■	■	■	■	■	■			
NCO								■	■	■

LPW Efficacy Conversion Chart

CODE	CCT SELECTED							
	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
80	–	0.91	0.96	1.00	1.04	1.11	1.11	1.11
90	–	0.91	0.96	1.00	1.04	1.11	1.11	1.11
95	–	0.91	0.96	1.00	1.04	1.11	1.03	1.04
SUN	–	0.90	0.92	1.00	1.01	1.07	1.04	1.05

LPW Performance

	DIRECT									
	DLAM	DBW60	DDA70	DA5025	DA4005	DM55	DN40	DS45	DS35	DS25
LM/W	111	123	123	130	128	129	116	82	82	82


$$LM/W = \frac{\left(\begin{array}{c} \text{DIRECT} \\ \text{LM/FT} \end{array} + \begin{array}{c} \text{INDIRECT} \\ \text{LM/FT} \end{array} \right)}{\left(\begin{array}{c} \text{DIRECT} \\ \text{W/FT} \end{array} + \begin{array}{c} \text{INDIRECT} \\ \text{W/FT} \end{array} \right)}$$

DIRECT PHOTOMETRICS

48" Length, 80+/3500K CRI/CCT, 3,000 Lumens


Static White Light

DLAM: Lambertian




LM/FT	W/FT	LM/W
350	3.2	109.4
500	4.6	108.7
750	6.9	108.7
1000	9.2	108.7

DBW60: Batwing 60°




LM/FT	W/FT	LM/W
350	2.8	123
500	4	125
750	6	125
1000	8	125

DDA70: Double Asymmetric 70°




LM/FT	W/FT	LM/W
350	2.8	125
500	4.1	122
750	6.1	123
1000	8.1	123.5

DA5025: Asymmetric 50° at 25° Tilt




LM/FT	W/FT	LM/W
350	2.8	123
500	4	125
750	6	125
1000	8	125

DA4005: Asymmetric 40° at 5° Tilt




LM/FT	W/FT	LM/W
350	2.8	125
500	3.9	128.2
750	5.9	127.1
1000	7.9	126.6

DM55: Medium 55°




LM/FT	W/FT	LM/W
350	2.8	125
500	3.9	128.2
750	5.9	127.1
1000	7.9	126.6

DN40: Narrow 40°




LM/FT	W/FT	LM/W
350	2.8	123
500	4	125
750	6	125
1000	8	125

DS45: Nano Cavity Optic Spot 45°




LM/FT	W/FT	LM/W
350	4.2	83.3
500	6	83.3
750	9	83.3
1000	12	83.3

DS35: Nano Cavity Optic Spot 35°



LM/FT	W/FT	LM/W
350	4.2	83.3
500	6	83.3
750	9	83.3
1000	12	83.3

DS25: Nano Cavity Optic Spot 25°



LM/FT	W/FT	LM/W
350	4.2	83.3
500	6	83.3
750	9	83.3
1000	12	83.3

COMPATIBLE OPTIC


FLUSH LENS	NANO BAFFLE	NCO

OPTICS CONFIGURATIONS


			
Flush Lens	Nano Baffle	Square NCO	Round NCO
White Flush Lens OFL	White Nano Baffle ONBW	White Square NCO OSNCOW	White Round NCO ORNCOW
	Black Nano Baffle ONBB	Black Square NCO OSNCOB	Black Round NCO ORNCOB
			Graphite Round NCO ORNCOG

LED OPTIONS


80: Standard 80+ CRI




90: Standard 90+ CRI



95: High-Definition 95+ CRI



SUN: Full Spectrum "SunLike"



CODE	DESCRIPTION	TYPICAL LED DATA							
		CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	M/P Ratio	LPW
80	Standard 80 CRI	3500K	82.5	7.8	84	96.7	82.5	0.51	190
90	Standard 90 CRI	3500K	91	54.3	89.3	98.9	89.2	0.55	175
95	High Definition 95 CRI	3500K	97.1	95	–	–	–	0.70	163
SUN	Full Spectrum SunLike®	3500K	95	85	–	–	–	–	130

POWER & CONTROLS

Voltage

Fixture Voltage (AC)

120–277 VAC

347 VAC, 50/60 Hz

Power Location

Remote Driver

LED Driver

Factory Selected, 36–39V Constant Current

Drivers

FDND - Factory Non-Dimming

FD00 - Factory 0–10V 0.1% Dim

FD01 - Factory 0–10V 1% Dim

FD10 - Factory 0–10V 10% Dim

FDDA - Factory DALI 0.1% Dim

FDDX - Factory DMX Dim

FDTR - Factory TRIAC Dim

LD01 - Lutron Hi-Lume 1% Dim

X_ - Specify Driver

Emergency Backup (Optional)

EMC - Emergency Circuit

EMB - Emergency Battery

(10 W — Remote)

X_ - Specify Backup

Power

10 W

Illumination Time

90 minutes

IP Rating

Suitable for Dry and Damp Locations,
indoor use only

XBox

Remote Driver Boxes (Optional)

To create a clean and organized power solution for multiple fixture installations see our Xbox Specification Guide. Reach out to a XICO Sales Representative to discuss your project's needs.

Compatible Control Options



