

# NANOSquare65 Surface



Direct | Standard Lengths

Project Name \_\_\_\_\_

Fixture Type \_\_\_\_\_



## DESCRIPTION

### 0.65" Compact Linear LED Surface Mount

NANOSquare65 Surface is a 0.65" square surface-mounted linear LED luminaire designed to be mounted on ceilings and between panels in popular wood grille systems. Delivering SmartBeam® performance in an ultra-compact form, it utilizes a remote driver to minimize visual clutter, while achieving up to 1,000 lm/ft and 135 lm/W performance. The system supports a wide variety of color temperatures, with a choice of optics and 8 direct beam distributions.

## FEATURES & BENEFITS

### Exceptional Performance

Up to 1,000 lm/ft, 135 lm/W efficacy

### Wide Range of LED Selections

Static, Tunable White, and Dim-to-Warm

### Designed with Options

Wide choice of SmartOptic® lenses, beam distributions, 80/90/95+ CRI, 2200K to 6500K CCT, and 0-10V, DALI, DMX, and TRIAC dimming

### Patented Innovations

Fusion® Optix Inside with unique SmartBeam® capabilities

### Proprietary Optical Components

Provides excellent light distribution and high-transmission

### Committed to Sustainability

Declare Listed and Red Free List materials

### Compliance


UL Listed, Dry and Damp Locations

### 5-Year Warranty

Standard 5-year warranty, 50,000 hours

## LIGHTING CONFIGURATIONS

Direct

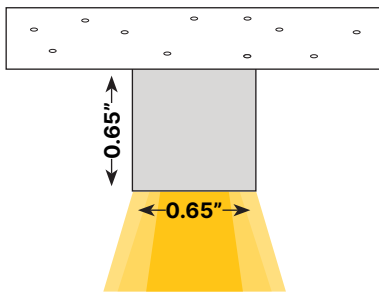

Designed & Built in  
**BOSTON**

## FIXTURE ORDERING

Project Name \_\_\_\_\_ Fixture Type \_\_\_\_\_

### 1) FIXTURE DESIGN

PRODUCT	FIXTURE LENGTH	FINISH	END CAP STYLE
<b>NSQ65-S</b> 0.65" Compact Linear LED Surface Mount	<b>2</b> - 2 ft <b>4</b> - 4 ft <b>6</b> - 6 ft <b>8</b> - 8 ft <b>X_</b> - Specify Ft', In"	<b>Powder Coated</b> <b>PMW</b> - Matte White <b>PMB</b> - Matte Black <b>PMG</b> - Matte Gray <b>PRAL_</b> - Specify RAL #	<b>E1</b> - Flat End Cap
	Custom fixtures are available in 3" increments beyond standard lengths.	<b>Anodized</b> <b>ACL</b> - Clear Anodized <b>ACU_</b> - Custom Anodized #	

### 2) LED LIGHT ENGINE

CRI	CCT	DIRECT BEAM PATTERN	DIRECT OUTPUT
<b>80</b> - Std. 80 CRI <b>90</b> - Std. 90 CRI <b>95</b> - High-Def. 95 CRI	<b>27</b> - 2700K <b>30</b> - 3000K <b>35</b> - 3500K <b>40</b> - 4000K <b>XD</b> - Dim-to-Warm <b>XT</b> - Tunable <b>X_</b> - Specify CCT	<b>DLAM</b> - Lambertian <b>DBW60</b> - Batwing 60° <b>DDA70</b> - Double Asym 70° <b>DA5025</b> - Asym 50° at 25° Tilt <b>DA4005</b> - Asym 40° at 5° Tilt <b>DM55</b> - Medium 55° <b>DN40</b> - Narrow 40° <b>X_</b> - Specify Beam <sup>1</sup>	<b>35</b> - 350 lm/ft <b>50</b> - 500 lm/ft <b>75</b> - 750 lm/ft <b>100</b> - 1,000 lm/ft <b>X_</b> - Specify lm/ft
	Specify Dim-to-Warm and Tunable between 2700K-6500K.		

### 3) FIXTURE POWER & CONTROLS

LINE VOLTAGE (DC)	REMOTE DRIVER (POWER) <sup>2</sup>	
<b>UNV</b> - 120/277V <b>347</b> - 347V	<b>FDND</b> - Factory Non-Dimming <b>FD00</b> - Factory 0-10V 0.1% Dim <b>FD01</b> - Factory 0-10V 1% Dim <b>FD10</b> - Factory 0-10V 10% Dim <b>FDDA</b> - Factory DALI 0.1% Dim <b>FDDX</b> - Factory DMX Dim <b>FDTR</b> - Factory TRIAC Dim <b>LD01</b> - Lutron Hi-Lume 1% Dim <b>X_</b> - Specify Driver	Footnotes: <sup>1</sup> Contact factory about custom beam options. <sup>2</sup> Standard driver box is included



### 3) FIXTURE POWER & CONTROLS

MOUNTING TYPE	POWER CORD	MOUNTING KIT
<b>WPC</b> - Wood Panel Clip <b>SMC</b> - Surface Mount Clip <b>SMM</b> - Surface Mount Magnet <b>TC1</b> - 9/16" Flat T-Bar Mount <b>TC2</b> - 9/16" Bolt Slot T-Bar Mount <b>TC3</b> - 15/16" Flat T-Bar Mount  TC1, TC2 and TC3 clips directly to grid t-bar.	<b>P48W</b> - 48" White Cord (Ø 1/8") <b>P48B</b> - 48" Black Cord (Ø 1/8") <b>P96W</b> - 96" White Cord (Ø 1/8") <b>P96B</b> - 96" Black Cord (Ø 1/8")	<b>SSMB</b> - Stainless Steel Surface Mounting Bracket

OPTIONAL	
EMERGENCY BACKUP	WIRELESS MODULE
<p><b>EMC</b> - Emergency Circuit  <b>EMB</b> - Emergency Battery (10 W — Remote)  <b>X_</b> - Specify Backup</p> <p>Specify requirements at time of order.</p>	<p><b>WCN</b> - Wireless Communication Node (Connected to LED Driver In-Fixture or In-Driver Box)  <b>PIR</b> - Wireless Communication Node + PIR Sensor (Standard Lens for Low Bay &lt; 10')  <b>MW</b> - Wireless Communication Node + MW Sensor (Standard for Low Bay &lt; 10')  <b>X_</b> - Other – Specify Embedded Component or Specific Non-Standard Sensor Detection Range</p>

## DIMENSIONS & INSTALLATION

### Dimensions

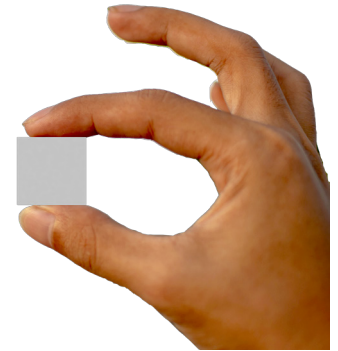

### Standard Fixtures



### Mounting Type

#### T-Bar Mount

Installs into a ceiling grid system and mount on to, or replace, typical T-Bar elements. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements.

#### Surface Mount

Installs onto a surface via clip or magnet. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements.


### Mounting Kit

#### Surface Mounting Bracket

Stainless Steel

### Mounting Options


#### SC1 - Surface Mount Clip




#### SM1 - Surface Mount Magnet




#### TC1 - 9/16" Flat T-Bar Mount Clip



#### TC2 - 9/16" Bolt Slot T-Bar Mount Clip



#### TC3 - 15/16" Flat T-Bar Mount Clip









## DIMENSIONS & INSTALLATION

### Ceiling Grid Mounting

NANOSquare65 Surface can be easily mounted between grilles in popular wood panel ceiling systems from manufacturers such as Armstrong, USG, Rulon Industries and Wood9 by specifying the WPC (wood panel clip) option. Having dimensions of only 0.65" x 0.65" the NANOSquare65 Surface is designed to match the thickness of a wood grille panel and when installed will sit flush with the bottom surface of the grille.

DETAIL E  
SCALE 1 : 2

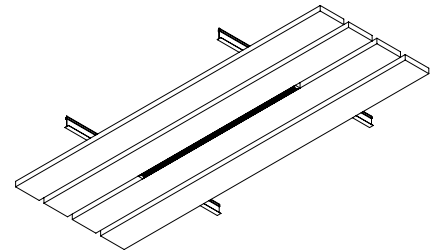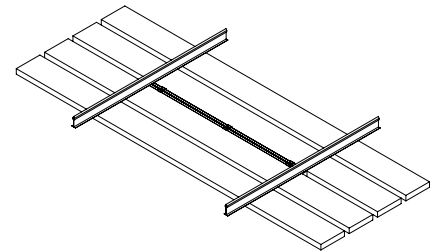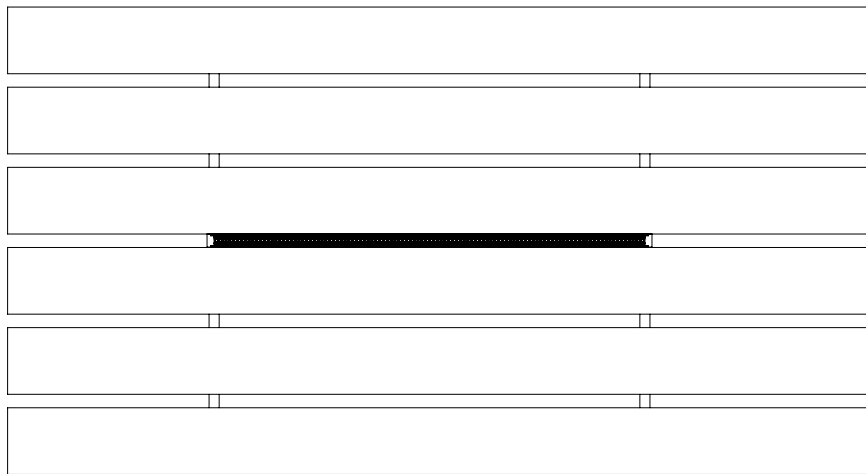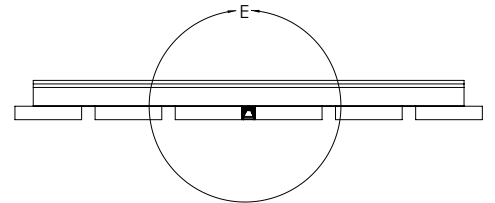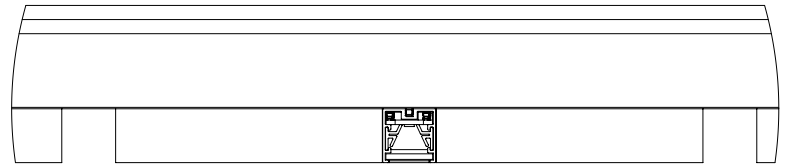


## SMARTBEAM® TECHNOLOGY


### The Ultimate Control of Lighting Distributions

SmartBeam makes it easy to specify the exact light required for any architectural space. Available in every XICO product; it is now possible to create truly tailored and engaging lighting that transform spaces, improves visual comfort, and saves energy.

To learn more about our SmartBeam Technology, please click or scan the QR Code.



### Direct Optics Choices

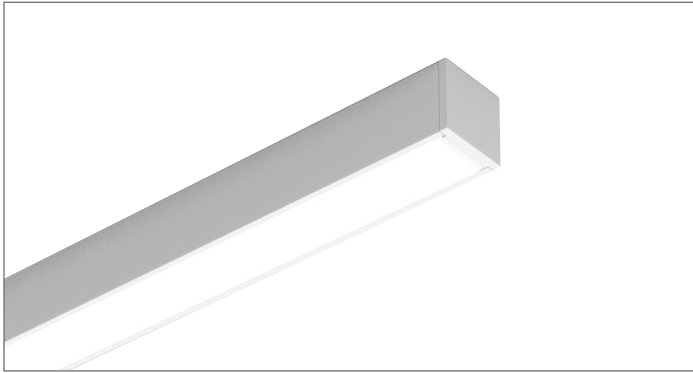

FL - Flush Lens

DIRECT OPTICS	BEAM PATTERN						
	DLAM	DBW60	DDA70	DA5025	DA4005	DM55	DN40
Flush Lens	■	■	■	■	■	■	■

### LPW Efficacy Conversion Chart

CODE	CCT SELECTED							
	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
80	-	0.91	0.96	1.00	1.04	1.11	1.11	1.11
90	-	0.91	0.96	1.00	1.04	1.11	1.11	1.11
95	-	0.91	0.96	1.00	1.04	1.11	1.03	1.04

### LPW Performance

	DIRECT						
	DLAM	DBW60	DDA70	DA5025	DA4005	DM55	DN40
LM/W	111	123	123	130	128	129	116


$$LM/W = \frac{\left( \begin{matrix} \text{DIRECT} \\ \text{LM/FT} \end{matrix} + \begin{matrix} \text{INDIRECT} \\ \text{LM/FT} \end{matrix} \right)}{\left( \begin{matrix} \text{DIRECT} \\ \text{W/FT} \end{matrix} + \begin{matrix} \text{INDIRECT} \\ \text{W/FT} \end{matrix} \right)}$$

## DIRECT PHOTOMETRICS

48" Length, 80+/3500K CRI/CCT, 3,000 Lumens


Static White Light

**DLAM:** Lambertian




LM/FT	W/FT	LM/W
350	3.2	109.4
500	4.6	108.7
750	6.9	108.7
1000	9.2	108.7

**DBW60:** Batwing 60°




LM/FT	W/FT	LM/W
350	2.8	123
500	4	125
750	6	125
1000	8	125

**DDA70:** Double Asymmetric 70°




LM/FT	W/FT	LM/W
350	2.8	125
500	4.1	122
750	6.1	123
1000	8.1	123.5

**DA5025:** Asymmetric 50° at 25° Tilt




LM/FT	W/FT	LM/W
350	2.8	123
500	4	125
750	6	125
1000	8	125

**DA4005:** Asymmetric 40° at 5° Tilt




LM/FT	W/FT	LM/W
350	2.8	125
500	3.9	128.2
750	5.9	127.1
1000	7.9	126.6

**DM55:** Medium 55°



LM/FT	W/FT	LM/W
350	2.8	125
500	3.9	128.2
750	5.9	127.1
1000	7.9	126.6

**DN40:** Narrow 40°



LM/FT	W/FT	LM/W
350	2.8	123
500	4	125
750	6	125
1000	8	125

## POWER & CONTROLS

### Voltage

#### Fixture Voltage (AC)

120–277 VAC  
347 VAC, 50/60 Hz

#### Power Location

Remote

#### LED Driver

Factory Selected, 36–39V Constant Current

### Drivers

**FDND** - Factory Non-Dimming  
**FD00** - Factory 0-10V 0.1% Dim  
**FD01** - Factory 0-10V 1% Dim  
**FD10** - Factory 0-10V 10% Dim  
**FDDA** - Factory DALI 0.1% Dim  
**FDDX** - Factory DMX Dim  
**FDTR** - Factory TRIAC Dim  
**LD01** - Lutron Hi-Lume 1% Dim  
**X\_** - Specify Driver

### Emergency Backup (Optional)

**EMC** - Emergency Circuit  
**EMB** - Emergency Battery (10 W — Remote)  
**X\_** - Specify Backup

#### Power

10 W

#### Illumination Time

90 minutes

#### IP Rating

Suitable for Dry and Damp Locations, indoor use only

### XBox

#### Remote Driver Boxes (Optional)

To create a clean and organized power solution for multiple fixture installations see our Xbox Specification Guide. Reach out to a XICO Sales Representative to discuss your project's needs.

### Compatible Control Options



