


EDGESolo275 Recessed Wall

Direct | Standard Lengths | Flangeless

XICO®

Project Name _____


Fixture Type _____

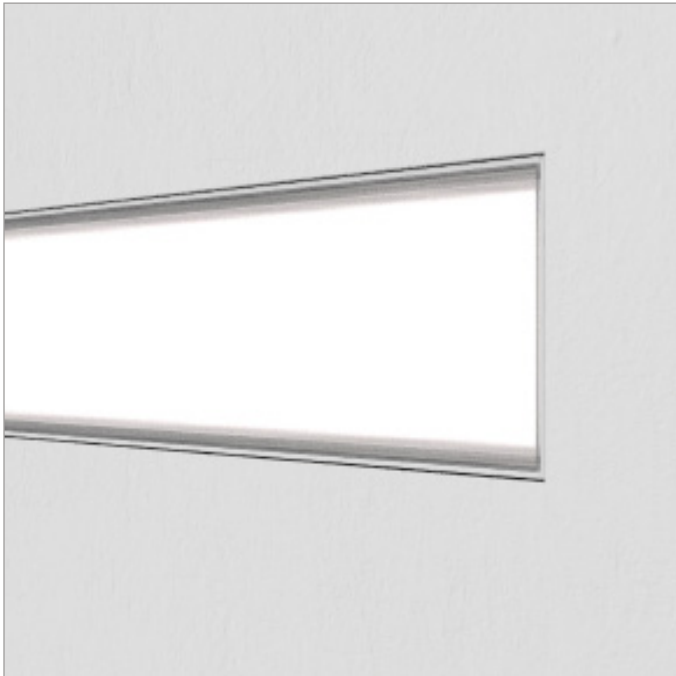

Remote Driver

LIGHTING CONFIGURATIONS

Direct

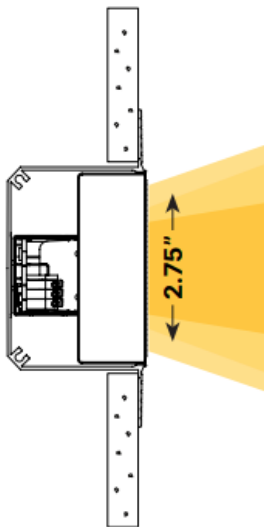

DESCRIPTION

2.75" Edge-Lit Linear LED Recessed Wall Mount

EDGESolo275 Wall is an innovative flangeless recessed wall-mounted LED luminaire designed to provide the perfect direct light. EDGE products all provide best-in-class efficiency and beam control options. EDGESolo275 Recessed Wall is specification-grade with high lumen per foot, high CRI, and circadian options. EDGESolo275 Recessed Wall incorporates an engineered LED light engine with fully customizable choices for lumen output, CCT, and CRI.

FEATURES & BENEFITS

Exceptional Performance

Up to 1,000 lm/ft, 135 lm/W efficacy.

LED Selections

Static White

Designed with Options

Wide choice of SmartOptic® lenses, beam distributions, 90/95+ CRI, 2700K to 6500K CCT, and 0-10V, DALI, DMX, and TRIAC dimming

Patented Innovations

Fusion® Optix Inside with unique SmartBeam® capabilities

Proprietary Optical Components

Provides excellent light distribution and high-transmission

Committed to Sustainability

Declare Listed and Red Free List materials

Compliance

UL Listed, Dry and Damp Locations

5-Year Warranty

Standard 5-year warranty, 50,000 hours



Designed & Built in
BOSTON

FIXTURE ORDERING

Project Name _____

Fixture Type _____

1) FIXTURE DESIGN

PRODUCT	FIXTURE LENGTH	FINISH	END CAP STYLE
ESO275-RW 2.75" Edge-Lit Linear LED Mud In [Flangeless] Wall Mount	2 - 2 ft 4 - 4 ft 6 - 6 ft 8 - 8 ft X_ - Specify Ft', In" Custom fixtures are available in 3" increments beyond standard lengths.	Powder Coated PMW - Matte White PMB - Matte Black PMG - Matte Gray PRAL_ - Specify RAL # Anodized ACL - Clear Anodized ACU_ - Custom Anodized #	E1 - Flat End Cap

2) LED LIGHT ENGINE

CRI	CCT	OPTIC	DIRECT BEAM PATTERN	DIRECT OUTPUT
80 - Std. 80 CRI 90 - Std. 90 CRI 95 - High-Def. 95 CRI SUN - Full SunLike	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K X_ - Specify CCT	OSL - Standard Lens	DLAM - Lambertian DBW65 - Batwing 65° DA6520U - Asym 65° at 20° Tilt Directing Up DA6520D - Asym 65° at 20° Tilt Directing Down X_ - Specify Beam ²	35 - 350 lm/ft 50 - 500 lm/ft 75 - 750 lm/ft 100 - 1,000 lm/ft X_ - Specify lm/ft

3) FIXTURE POWER & CONTROLS

LINE VOLTAGE (DC)	REMOTE DRIVER (POWER) ¹	
UNV - 120/277V 347 - 347V	FDND - Factory Non-Dimming FD00 - Factory 0-10V 0.1% Dim FD01 - Factory 0-10V 1% Dim FD10 - Factory 0-10V 10% Dim FDDA - Factory DALI 0.1% Dim FDDX - Factory DMX Dim FDTR - Factory TRIAC Dim LD01 - Lutron Hi-Lume 1% Dim X_ - Specify Driver	Footnotes: ¹ Standard driver box is included


4) FIXTURE MOUNTING & CONNECTIONS

STYLE
MK - Mud-In Channel

OPTIONAL	
EMERGENCY BACKUP	WIRELESS MODULE
EMC - Emergency Circuit EMB - Emergency Battery (10W — Remote) X_ - Specify Backup Specify requirements at time of order.	WCN - Wireless Communication Node (Connected to LED Driver In-Fixture or In-Driver Box) PIR - Wireless Communication Node + PIR Sensor (Standard Lens for Low Bay < 10') MW - Wireless Communication Node + MW Sensor (Standard for Low Bay < 10') X_ - Other – Specify Embedded Component or Specific Non-Standard Sensor Detection Range

DIMENSIONS & INSTALLATION

Dimensions

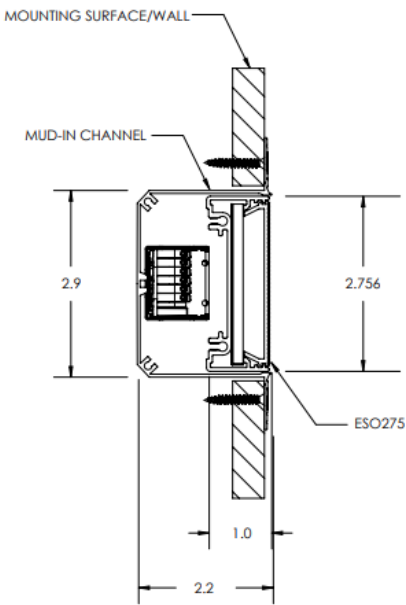

Standard Fixtures




Mounting Type

Recessed Wall Mount

Installs into wall with supplied Mud-In Channel. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements.

Mounting Options

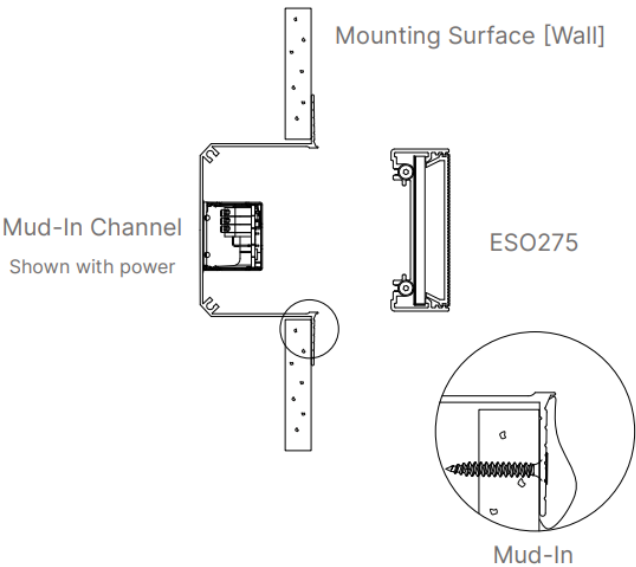

SMARTBEAM® TECHNOLOGY


The Ultimate Control of Lighting Distributions

SmartBeam makes it easy to specify the exact light required for any architectural space. Available in every XICO product; it is now possible to create truly tailored and engaging lighting that transform spaces, improves visual comfort, and saves energy.

To learn more about our SmartBeam Technology, please click or scan the QR Code.



Direct Optics Choices



SL - Standard Lens

DIRECT OPTICS	BEAM PATTERN		
	DLAM	DBW65	DA6520
Standard Lens			

LPW Efficacy Conversion Chart

CRI CODE	CCT SELECTED							
	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
90	–	0.91	0.96	1.00	1.04	1.11	1.11	1.11
95	–	0.91	0.96	1.00	1.04	1.11	1.03	1.04
SUN	–	0.90	0.92	1.00	1.01	1.07	1.04	1.05

LPW Performance




	DIRECT		
	DLAM	DBW65	DA6520
LM/W	110	109	141

DIRECT PHOTOMETRICS

Static White Light




48" Length, 90+/3500K CRI/CCT, 3,000 Lumens

DLAM: Lambertian






LM/FT	W/FT	LM/W
350	3.2	109.4
500	4.5	111.1
750	6.8	110
1000	9.1	109.9

DBW65: Batwing 65°






LM/FT	W/FT	LM/W
350	3.2	109.4
500	4.5	111.1
750	6.8	109
1000	9.1	109.9

DA6520: Asymmetric 65° at 20° Tilt
Directing Up



LM/FT	W/FT	LM/W
350	2.5	140
500	3.5	142.9
750	5.3	141
1000	7.1	140.8


DA6520: Asymmetric 65° at 20° Tilt
Directing Down




LM/FT	W/FT	LM/W
350	2.5	140
500	3.5	142.9
750	5.3	141
1000	7.1	140.8

LED OPTIONS


90: Standard 90+ CRI

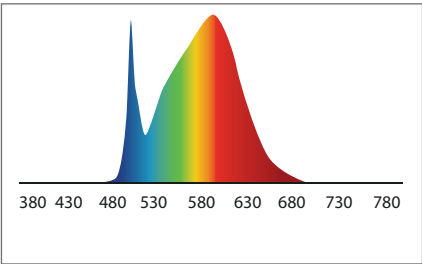

95: High-Definition 95+ CRI

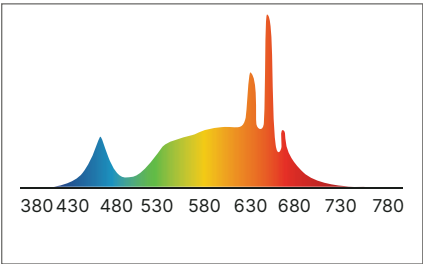

SUN: Full Spectrum "SunLike"

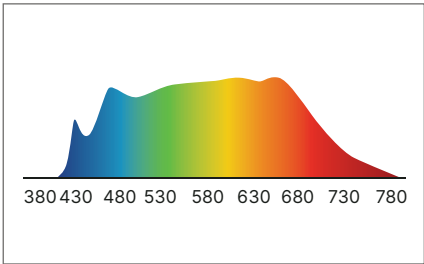

CODE	DESCRIPTION	TYPICAL LED DATA							
		CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	M/P Ratio	LPW
90	Standard 90 CRI	3500K	91	54.3	89.3	98.9	89.2	0.55	175
95	High Definition 95 CRI	3500K	97.1	95	–	–	–	0.70	163
SUN	Full Spectrum SunLike®	3500K	95	85	–	–	–	–	130

POWER & CONTROLS

Voltage

Fixture Voltage (AC)

120–277 VAC

347 VAC, 50/60 Hz

Power Location

Remote

LED Driver

Factory Selected, 36–39V Constant Current

Drivers

FDND - Factory Non-Dimming

FD00 - Factory 0–10V 0.1% Dim

FD01 - Factory 0–10V 1% Dim

FD10 - Factory 0–10V 10% Dim

FDDA - Factory DALI 0.1% Dim

FDDX - Factory DMX Dim

FDTR - Factory TRIAC Dim

LD01 - Lutron Hi-Lume 1% Dim

X_ - Specify Driver

Emergency Backup (Optional)

EMC - Emergency Circuit

EMB - Emergency Battery

(10 W — Remote)

X_ - Specify Backup

Power

10 W

Illumination Time

90 minutes

IP Rating

Suitable for Dry and Damp Locations,
indoor use only

XBox

Remote Driver Boxes (Optional)

To create a clean and organized power solution for multiple fixture installations see our XBox Specification Guide. Reach out to a XICO Sales Representative to discuss your project's needs.

Compatible Control Options



TECHNICAL SPECIFICATIONS

Finishes & Design Options

Powder Coated Housing Colors (Matte Finish)

White (RAL9003)
Black (RAL9005)
Gray (RAL7001)
Custom RAL



Housing Material

6063-T5 extruded, recycled aluminum

Mounting Brackets

Sheet Metal

End Cap Material

6063-T5 extruded, recycled aluminum

Lens Options and Material

Standard lens option with Patented SmartOptics® made from Acrylic (PMMA)

Standards & Certifications

Sustainability

Low carbon, environmentally conscious packaging and shipping methods

Compliance

BABAA & TAA compliant in-house manufacturing in Boston, MA with North American supply chain



Certifications



Declare Listed and Red List Free

Low carbon, environmentally conscious packaging and shipping methods

Recyclable

SmartOptics and all powder coated and anodized parts are fully recyclable at end of life

Manufacturing

All XICO products and associated optics and LED engines are assembled at our factory in Woburn, MA

Quality Assurance

Each product is engineered for reliability and tested for quality assurance

Declare.

Nano Series
XICO Lighting

Final Assembly: Woburn, MA, USA
Life Expectancy (L70 - Year):
End of Life Options: Recyclable (99%)

Ingredients:
Aluminum; Glass; oxides, chemicals; Polymethyl methacrylate; Phenol; 4,4'-O-methylstyrylidenes; polymer with 2,2'-(2-methylstyrylidenes) bis(4,4'-phenyleneoxy)ethylene[2,2]bis(oxazoles); 1,2-dimethoxyethanol; 1,1-dimethyl ethyl polymer with 1,4-dimethyl (4-benzene)carboxylate and 1,2-ethanediol; Polyethylene Glycol; Polyethylene Terephthalate; Barium sulfate; Magnesium; Silicon; Phosphoric acid; phosphoric acid; diethyl ester; iron; Siloxane and Siloxane; di-Nickel Chromium; metallic Gold; Manganese; Titanium; Zinc; Nickel (metallic)

Declare Listed

At Xico Lighting, we are committed to transparency and sustainability. That's why all our products are Declare listed, providing clear insights into their environmental footprint and safety. Look for these internationally recognized labels on Xico products, packaging, or at xicoled.com/declare.




Red List Free

Xico Lighting is dedicated to creating safe, sustainable solutions. All our products are Red List Free, meeting the highest industry standards for healthy and environmentally responsible materials as defined by the International Living Future Institute (ILFI). Learn more at xicoled.com/declare.

Quick Links

5-YR Warranty



Business Terms



Patents & Trademarks



SmartBeam



Revit Files

