

Light efficiency:

106 Lumen/Watt**Output: 3973 lm**




Light quality:

CRI: 82.4**Peak: 1418 cd**

Color temperature:

3397 K**Power: 37.5 W****PF: 1.0**

No photo

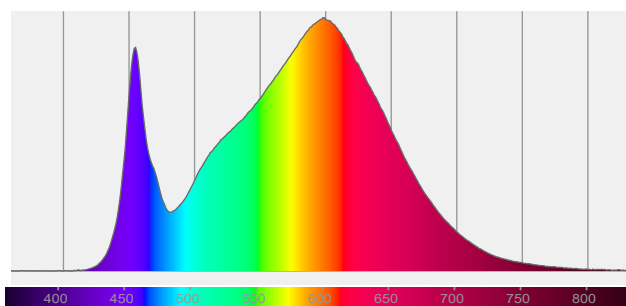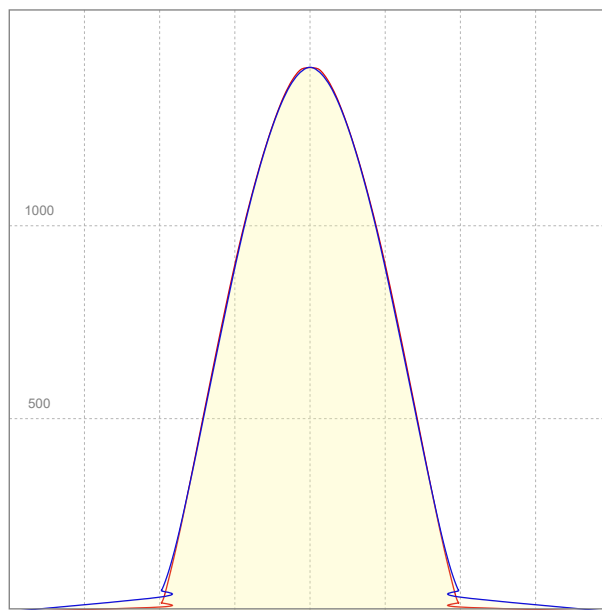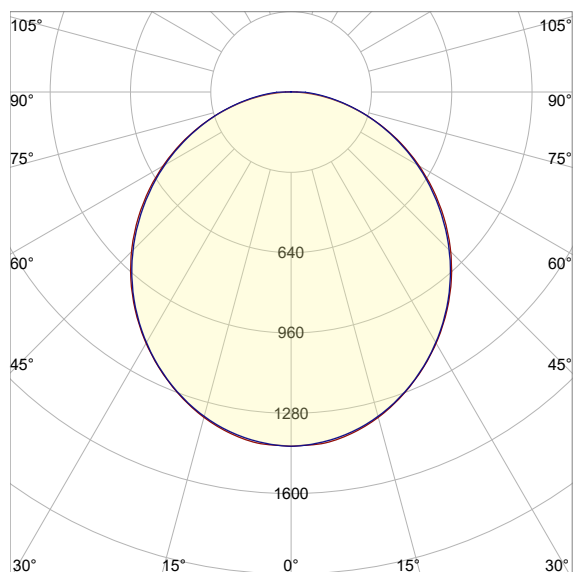

Product name:

EDGESolo Wide 110°

Item number:

ESO275

Configuration:

ESO275-4FT-3580-AL-DW110-1000LPF



Date and time:

8/11/2021 12:47:46 PM


Description:

Power Supply @ 1120 mA**7070, 400A Diffuser Film with Batwing Lens**


Color Details

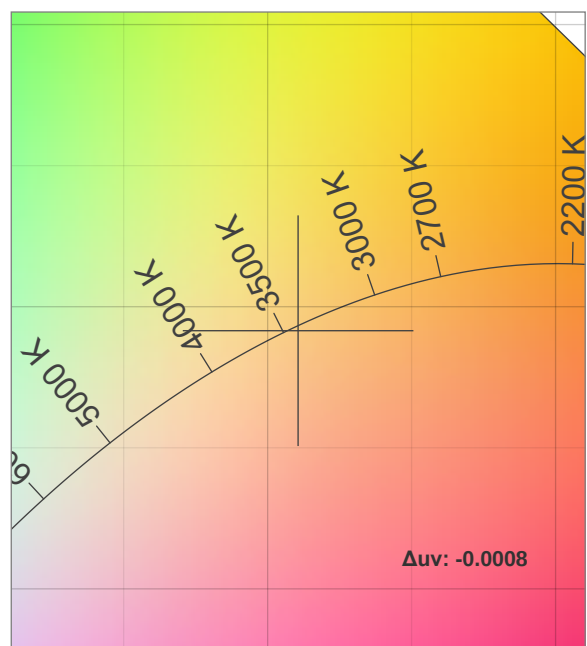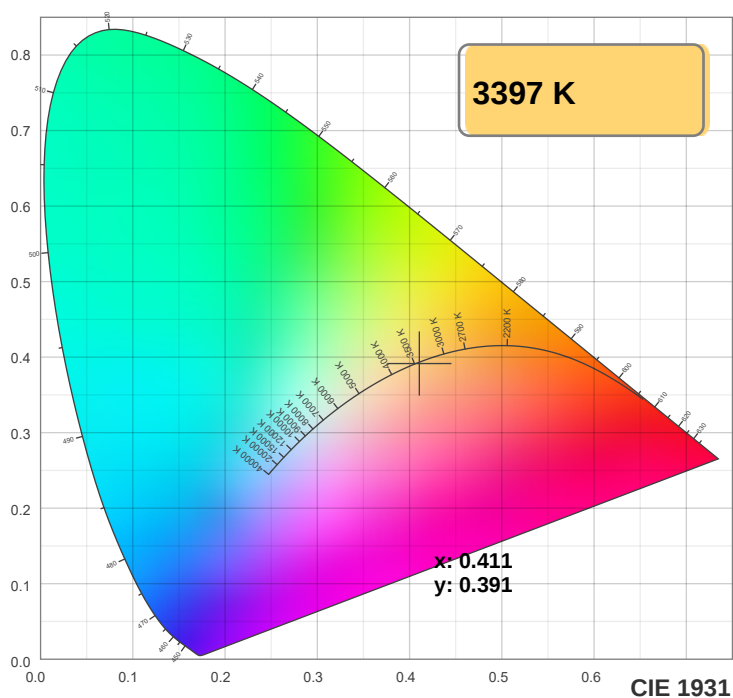

TM-30: 83.1

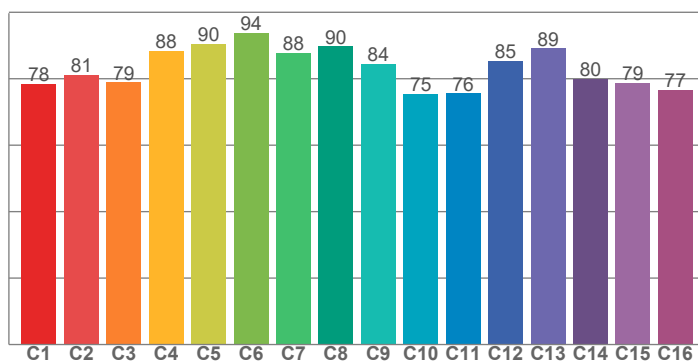

CRI: 82.4 (R1-R8)

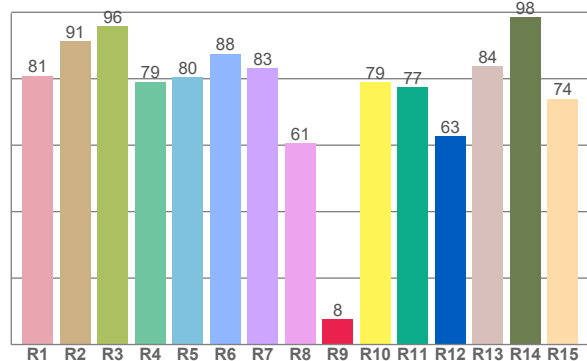

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80.9	91.3	95.9	79.1	80.5	87.6	83.2	60.6	7.6	78.9	77.4	62.6	83.7	98.4	73.9


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
78.5	81.1	78.9	88.5	90.5	93.8	87.7	89.7	84.5	75.4	75.6	85.3	89.1	80.0	78.7	76.6

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
79.5	96.4	79.7	74.3	78.7	80.9	82.9	86.4	96.8	89.6	84.9	82.5	81.7	71.5	74.5

CQS: 81.2

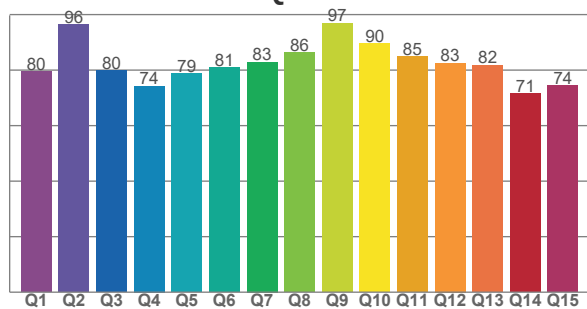

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3397 K	82.4	7.6	83.1	94.3	81.2	0.411	0.391	0.239	0.342	-0.0008

TM-30 Details







Rf 83.1

Fidelity index Rf


Rg 94.3

Gamut index Rg

Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
1	78	-12%	1%
2	81	-8%	7%
3	79	-3%	10%
4	88	-1%	5%
5	90	-3%	3%
6	94	0%	-3%
7	88	-7%	-3%
8	90	-6%	1%
9	84	-7%	8%
10	75	-5%	16%
11	76	3%	15%
12	85	9%	4%
13	89	4%	-6%
14	80	6%	-15%
15	79	-3%	-14%
16	77	-7%	-11%

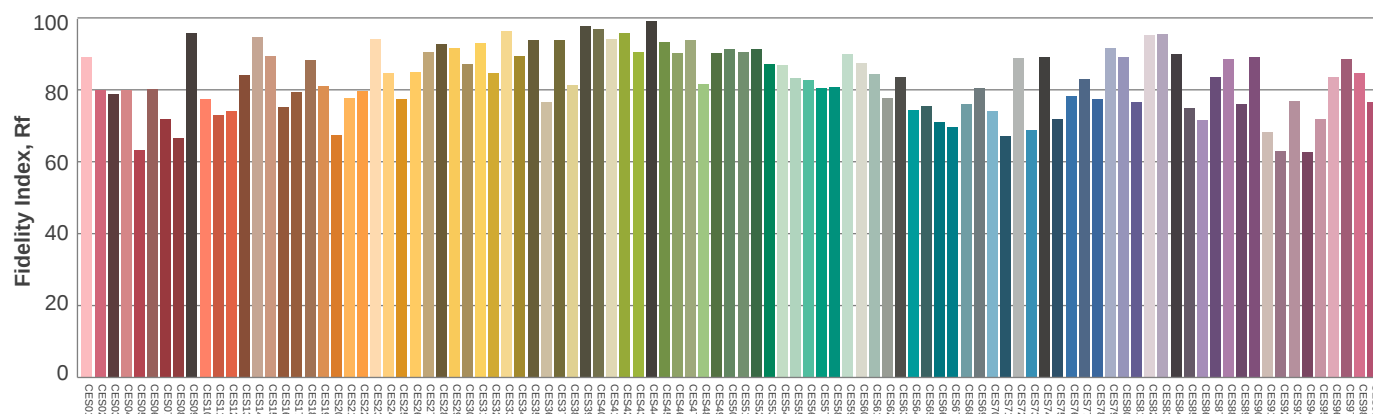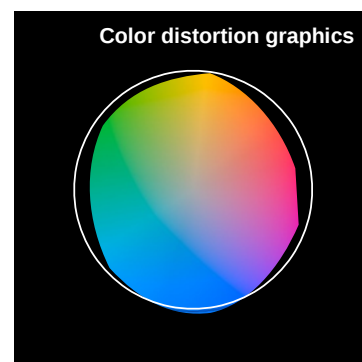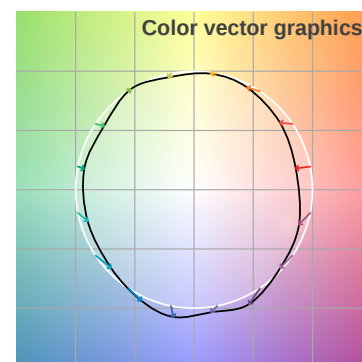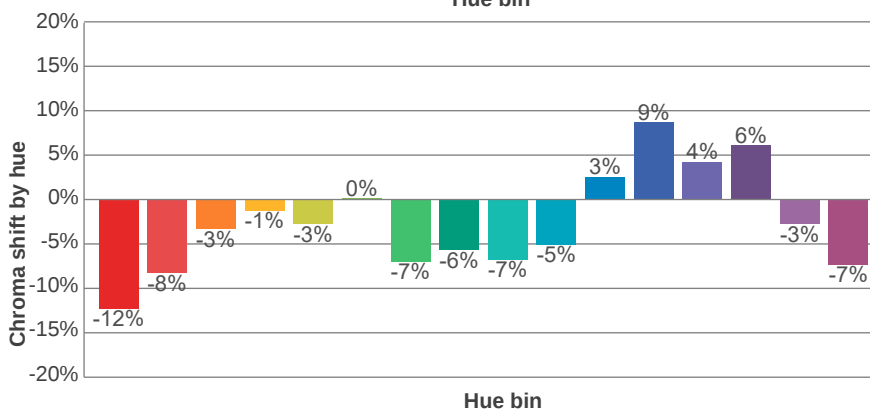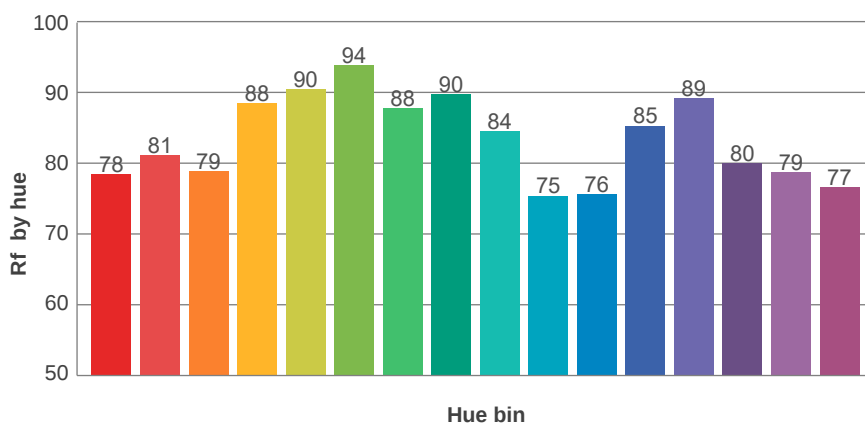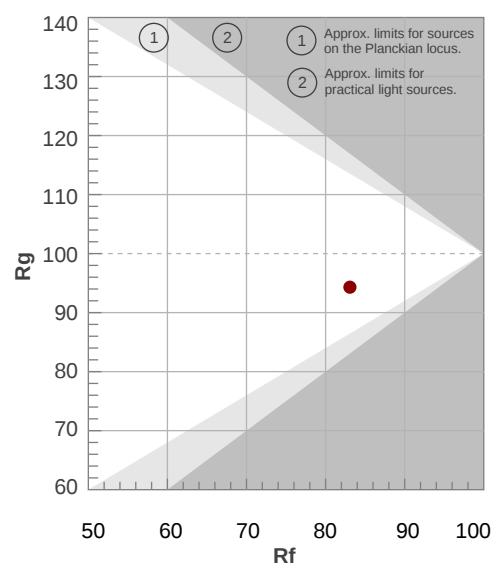

Beam details

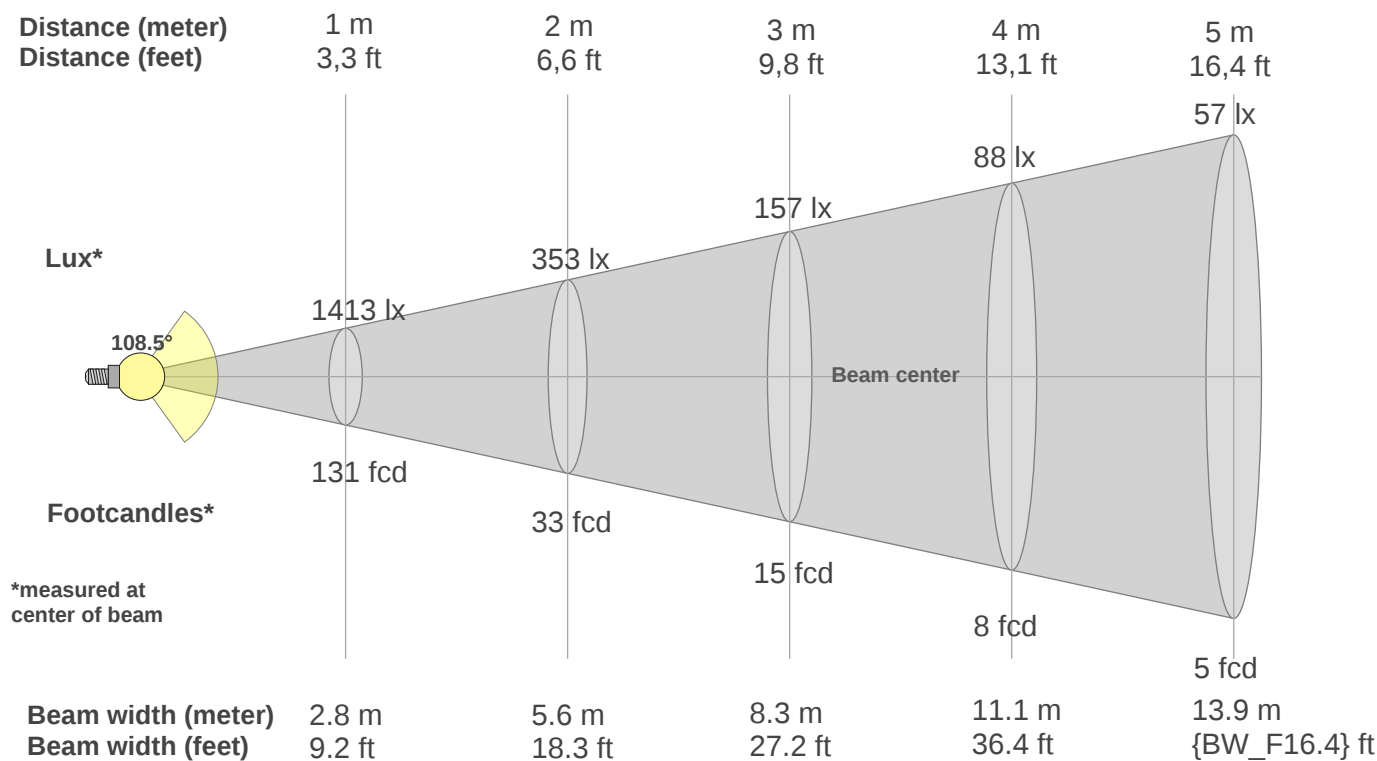

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1413lx	353lx	157lx	88lx	57lx	39lx	29lx	22lx	17lx	14lx	12lx	10lx	8lx	7lx	6lx	6lx	5lx	4lx	4lx	4lx
131.2fcd	32.8fcd	14.6fcd	8.2fcd	5.2fcd	3.6fcd	2.7fcd	2.1fcd	1.6fcd	1.3fcd	1.1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd	0.5fcd	0.5fcd	0.4fcd	0.4fcd	0.3fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1413	1405	1381	1341	1288	1226	1155	1077	991	899	799	696	589	482	373	267	167	76	12	11
100%	99%	98%	95%	91%	87%	82%	76%	70%	64%	57%	49%	42%	34%	26%	19%	12%	5%	1%	1%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1413	1399	1374	1336	1285	1223	1152	1072	985	890	789	686	581	475	370	270	176	99	37	35
100%	99%	97%	95%	91%	87%	82%	76%	70%	63%	56%	49%	41%	34%	26%	19%	12%	7%	3%	2%

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1413	1405	1381	1341	1288	1226	1155	1077	991	899	799	696	589	482	373	267	167	76	12	11
100%	99%	98%	95%	91%	87%	82%	76%	70%	64%	57%	49%	42%	34%	26%	19%	12%	5%	1%	1%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1413	1399	1374	1336	1285	1223	1152	1072	985	890	789	686	581	475	370	270	176	99	37	35
100%	99%	97%	95%	91%	87%	82%	76%	70%	63%	56%	49%	41%	34%	26%	19%	12%	7%	3%	2%

UGR

Glare evaluation according to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	22.0	23.2	22.2	23.5	23.7	21.9	23.1	22.1	23.4	23.6
	3H	23.5	24.7	23.9	25.0	25.2	23.4	24.7	23.8	24.9	25.2
	4H	24.1	25.4	24.5	25.6	25.9	24.1	25.3	24.5	25.6	25.8
	6H	24.7	25.8	25.0	26.1	26.5	24.7	25.8	25.0	26.1	26.4
	8H	24.9	25.9	25.2	26.2	26.7	24.9	26.0	25.3	26.3	26.7
	12H	25.0	26.0	25.4	26.4	26.8	25.1	26.1	25.5	26.4	26.9
4H	2H	22.6	23.8	23.0	24.0	24.3	22.5	23.7	22.9	24.0	24.3
	3H	24.4	25.4	24.8	25.7	26.2	24.3	25.3	24.7	25.7	26.1
	4H	25.1	26.1	25.6	26.5	27.0	25.1	26.0	25.5	26.4	27.0
	6H	25.8	26.7	26.3	27.0	27.4	25.8	26.7	26.3	27.0	27.4
	8H	26.0	26.8	26.5	27.2	27.6	26.1	26.9	26.6	27.2	27.6
	12H	26.2	26.9	26.7	27.3	27.8	26.3	27.0	26.8	27.4	27.9
8H	4H	25.4	26.3	26.0	26.6	27.0	25.4	26.2	25.9	26.6	27.0
	6H	26.3	26.9	26.8	27.4	27.9	26.3	26.9	26.8	27.4	27.9
	8H	26.6	27.2	27.2	27.7	28.4	26.7	27.2	27.2	27.7	28.4
	12H	26.9	27.4	27.5	27.9	28.5	27.0	27.5	27.6	28.0	28.6
12H	4H	25.5	26.2	26.0	26.6	27.1	25.4	26.1	25.9	26.5	27.0
	6H	26.4	26.9	26.9	27.4	28.1	26.4	26.9	26.9	27.4	28.1
	8H	26.8	27.2	27.4	27.7	28.4	26.8	27.3	27.4	27.8	28.4
Variation of the observer position for the luminaire distance S											
S = 1.0H		0.1 / -0.1					0.1 / -0.1				
S = 1.5H		0.1 / -0.2					0.1 / -0.2				
S = 2.0H		0.3 / -0.4					0.3 / -0.4				
CIE 117-1995. Corrected glare indices referring to 3973 lm total luminous flux											