

Light efficiency:

141 Lumen/Watt

Output: 3031 lm

Light quality:

CRI: 81.8

Peak: 985 cd




Color temperature:

3400 K

Power: 21.5 W

PF: 1.0

No photo

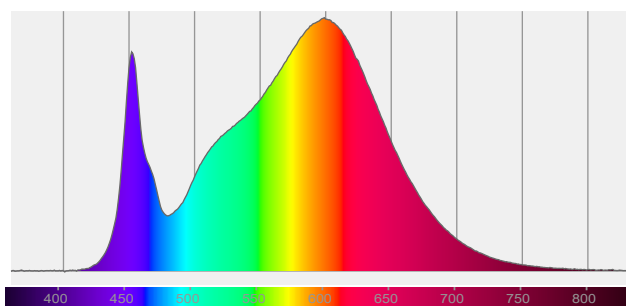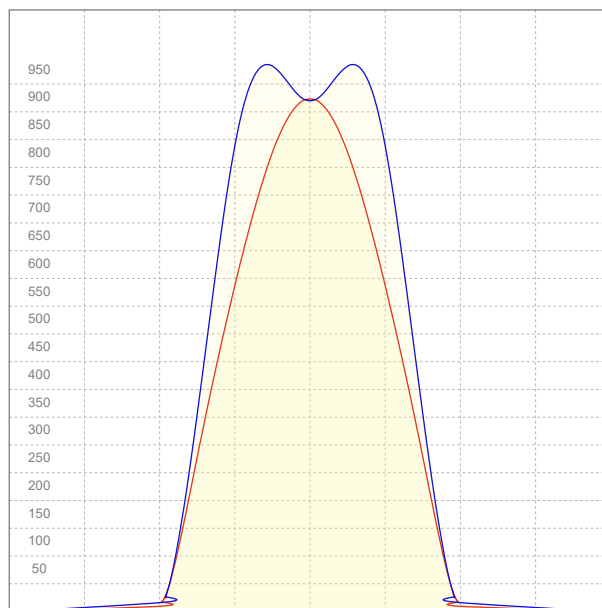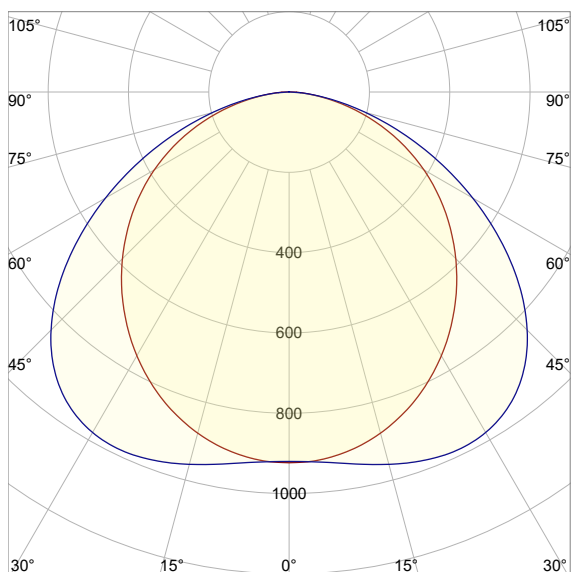

Product name:

MICROBeam Batwing 60°

Item number:

MBE140

Configuration:

MBE140-4FT-3580-AL-DB60-750LPF



Date and time:

8/9/2021 9:15:32 AM

Description:


Power Supply @ 580mA, No Lenticular

Color Details

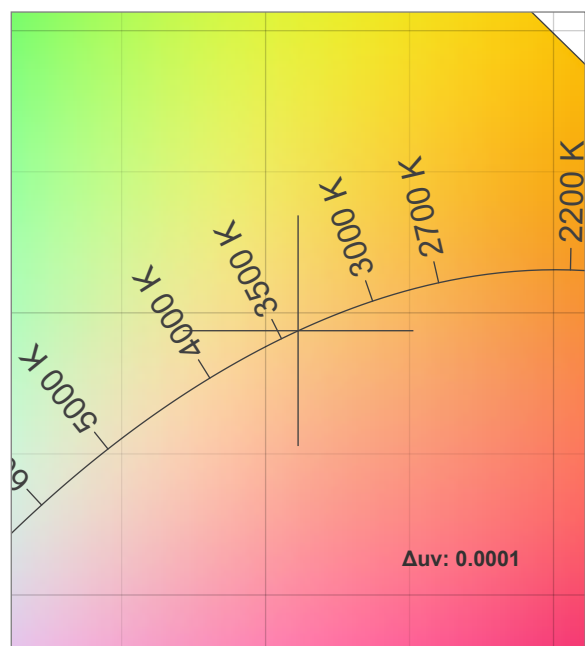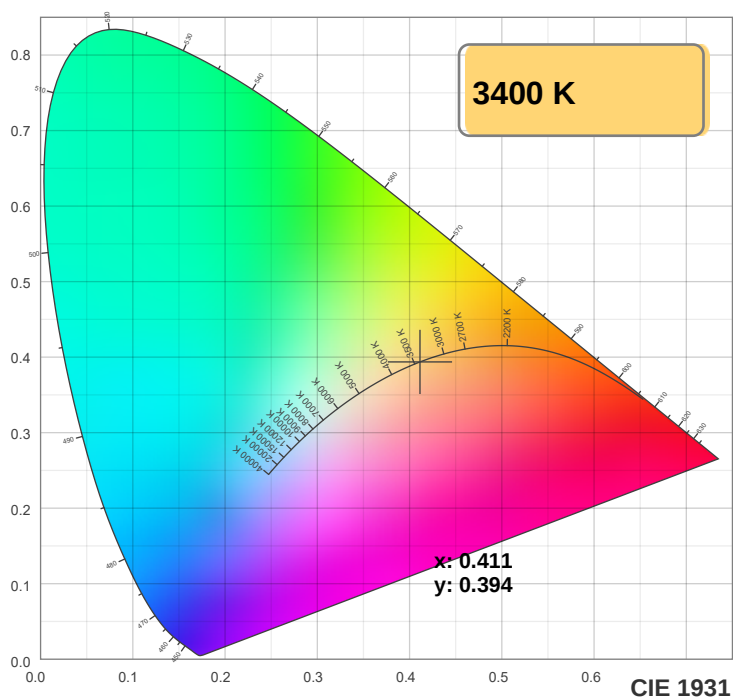


CIE 1931 ZOOM

TM-30: 83.2

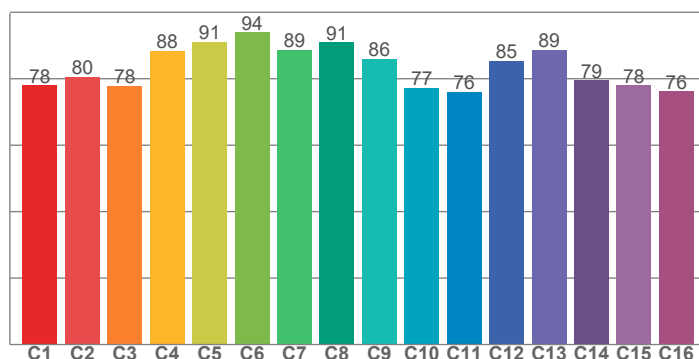

CRI: 81.8 (R1-R8)

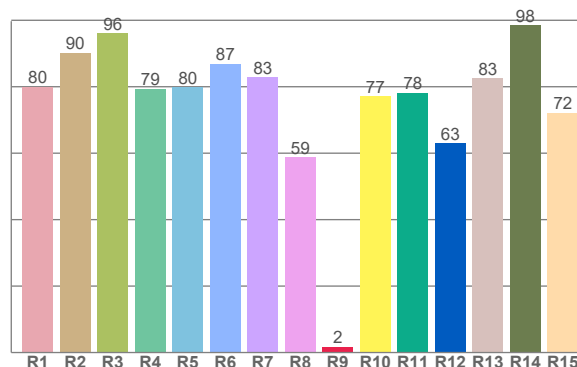

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80.0	90.3	96.1	79.4	79.9	86.9	82.9	58.7	1.7	77.2	78.2	63.0	82.6	98.4	72.2


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
78.0	80.5	77.8	88.4	91.2	93.9	88.6	91.0	86.0	77.2	76.1	85.3	88.7	79.5	78.0	76.2

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
78.4	96.5	79.9	75.6	79.9	81.7	83.0	86.5	96.7	89.4	85.1	82.5	81.5	69.7	72.8

CQS: 81.1

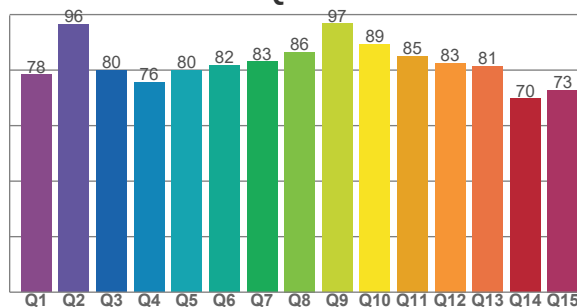

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3400 K	81.8	1.7	83.2	94.7	81.1	0.411	0.394	0.238	0.342	0.0001

TM-30 Details







Rf 83.2

Fidelity index Rf


Rg 94.7

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	78	-13%	0%
2	80	-9%	7%
3	78	-3%	11%
4	88	-1%	6%
5	91	-1%	3%
6	94	1%	-2%
7	89	-6%	-4%
8	91	-5%	0%
9	86	-7%	7%
10	77	-6%	14%
11	76	2%	15%
12	85	8%	4%
13	89	5%	-6%
14	79	6%	-15%
15	78	-3%	-15%
16	76	-8%	-12%

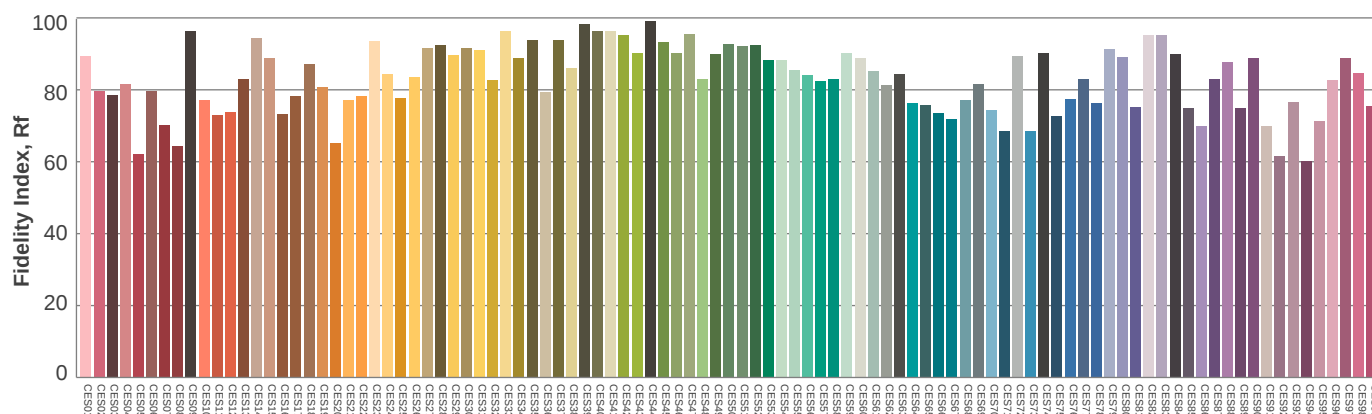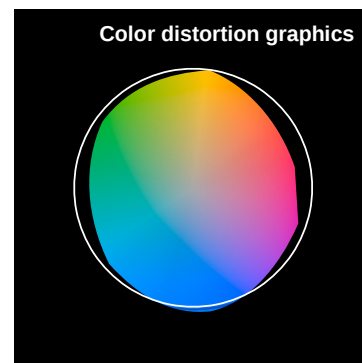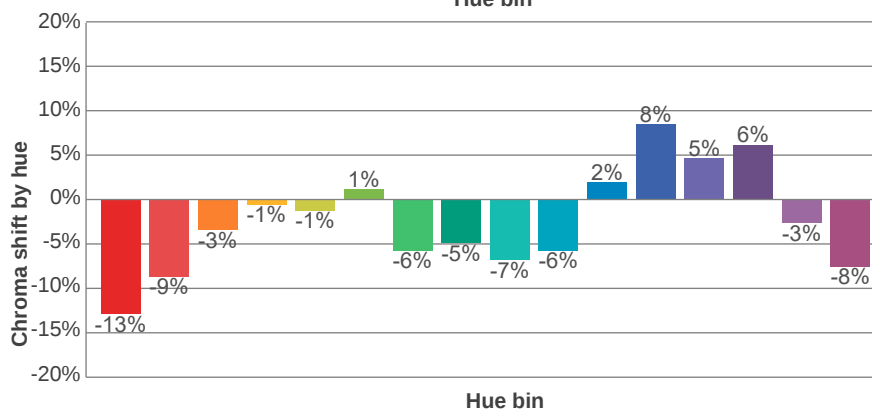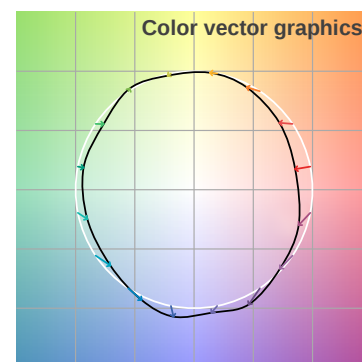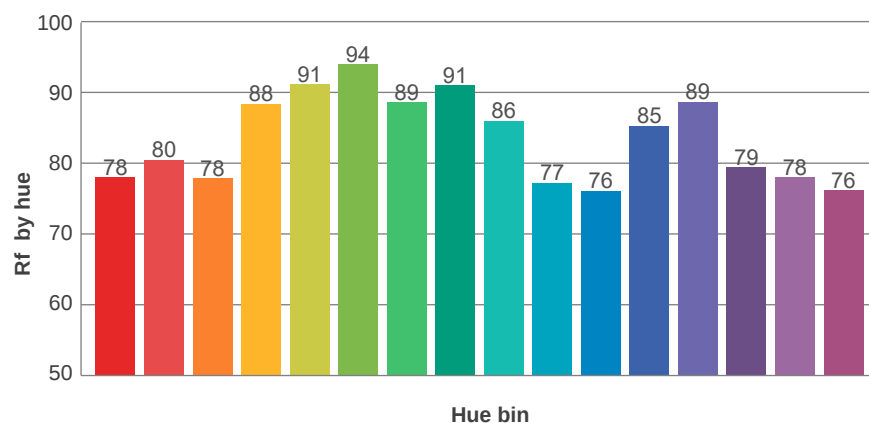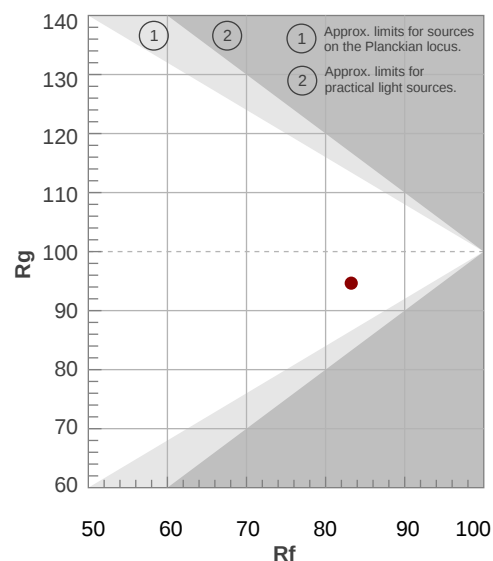

Beam details

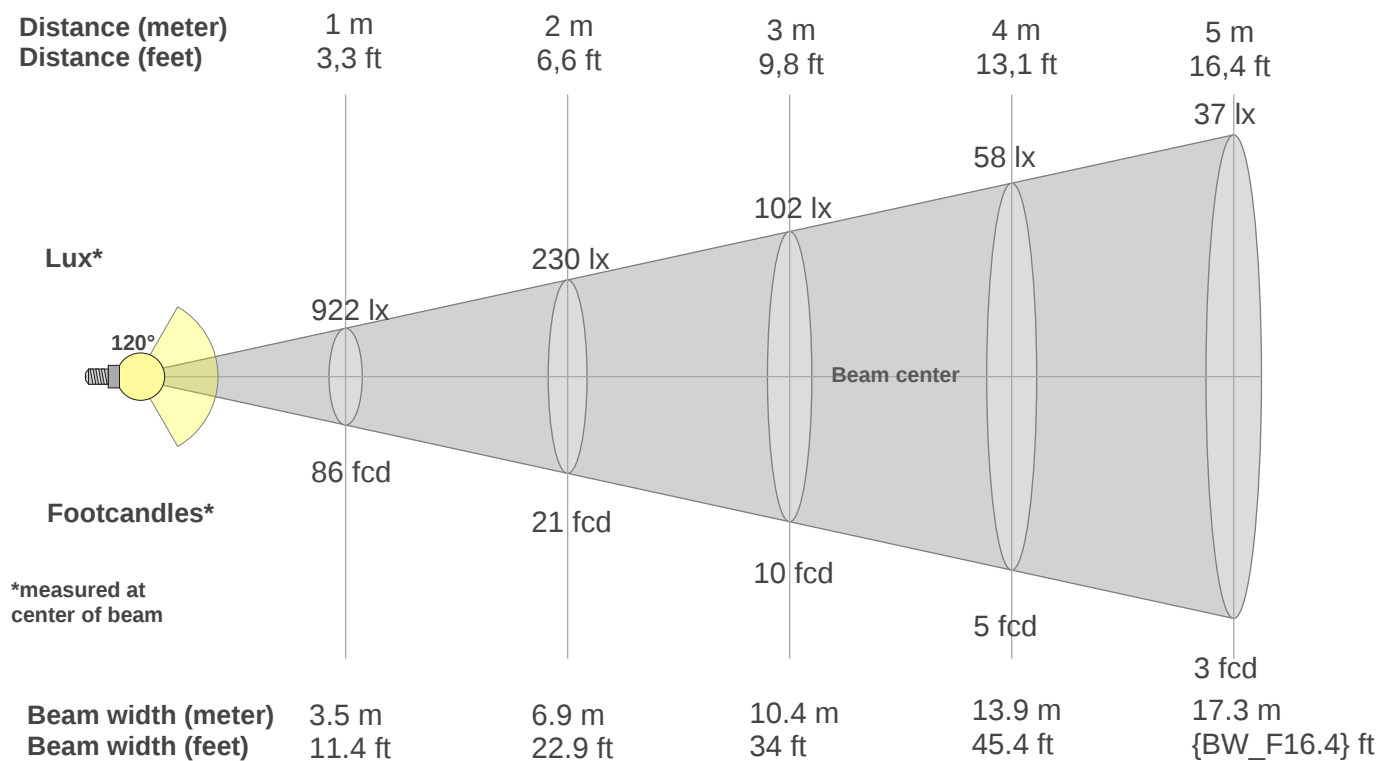

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
922lx	230lx	102lx	58lx	37lx	26lx	19lx	14lx	11lx	9lx	8lx	6lx	5lx	5lx	4lx	4lx	3lx	3lx	3lx	2lx
85.6fcd	21.4fcd	9.5fcd	5.4fcd	3.4fcd	2.4fcd	1.7fcd	1.3fcd	1.1fcd	0.9fcd	0.7fcd	0.6fcd	0.5fcd	0.4fcd	0.4fcd	0.3fcd	0.3fcd	0.3fcd	0.2fcd	0.2fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
922	918	903	879	846	805	758	705	648	587	523	456	387	315	241	167	97	41	9	9
100%	100%	98%	95%	92%	87%	82%	76%	70%	64%	57%	50%	42%	34%	26%	18%	11%	4%	1%	1%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
922	925	941	960	976	985	978	954	907	838	747	642	528	412	300	197	108	40	16	15
100%	100%	102%	104%	106%	107%	106%	103%	98%	91%	81%	70%	57%	45%	33%	21%	12%	4%	2%	2%

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
922	918	903	879	846	805	758	705	648	587	523	456	387	315	241	167	97	41	9	9
100%	100%	98%	95%	92%	87%	82%	76%	70%	64%	57%	50%	42%	34%	26%	18%	11%	4%	1%	1%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
922	925	941	960	976	985	978	954	907	838	747	642	528	412	300	197	108	40	16	15
100%	100%	102%	104%	106%	107%	106%	103%	98%	91%	81%	70%	57%	45%	33%	21%	12%	4%	2%	2%

UGR

Glare evaluation according to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	23.0	24.3	23.3	24.6	24.8	24.5	25.8	24.8	26.1	26.3
	3H	24.4	25.7	24.8	26.0	26.2	25.8	27.1	26.3	27.4	27.6
	4H	25.0	26.2	25.4	26.5	26.7	26.4	27.6	26.8	27.9	28.1
	6H	25.4	26.5	25.7	26.8	27.2	26.7	27.8	27.1	28.1	28.5
	8H	25.5	26.6	25.9	26.9	27.3	26.8	27.9	27.2	28.2	28.6
	12H	25.6	26.6	26.0	26.9	27.4	26.8	27.8	27.2	28.2	28.6
4H	2H	23.9	25.1	24.3	25.4	25.6	25.0	26.2	25.4	26.5	26.8
	3H	25.5	26.5	25.9	26.9	27.3	26.7	27.7	27.1	28.0	28.5
	4H	26.1	27.1	26.6	27.5	28.0	27.2	28.2	27.7	28.6	29.1
	6H	26.6	27.5	27.1	27.9	28.2	27.7	28.6	28.2	28.9	29.3
	8H	26.8	27.6	27.3	28.0	28.3	27.8	28.6	28.3	29.0	29.4
	12H	26.9	27.5	27.4	28.0	28.4	27.9	28.5	28.3	29.0	29.4
8H	4H	26.5	27.3	27.0	27.7	28.1	27.5	28.3	28.0	28.7	29.0
	6H	27.1	27.8	27.6	28.2	28.8	28.0	28.7	28.6	29.1	29.7
	8H	27.4	27.9	27.9	28.4	29.1	28.3	28.8	28.8	29.3	30.0
	12H	27.5	28.0	28.1	28.5	29.1	28.4	28.8	29.0	29.3	29.9
12H	4H	26.5	27.2	27.0	27.6	28.1	27.5	28.1	28.0	28.6	29.0
	6H	27.2	27.8	27.7	28.3	28.9	28.1	28.7	28.6	29.2	29.8
	8H	27.5	27.9	28.1	28.4	29.1	28.3	28.8	28.9	29.3	29.9
Variation of the observer position for the luminaire distance S											
S = 1.0H		0.1 / -0.1					0.1 / -0.1				
S = 1.5H		0.2 / -0.3					0.2 / -0.3				
S = 2.0H		0.4 / -0.7					0.6 / -0.6				
CIE 117-1995. Corrected glare indices referring to 3031 lm total luminous flux											