
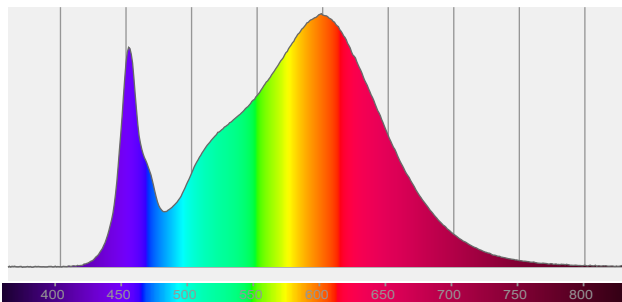
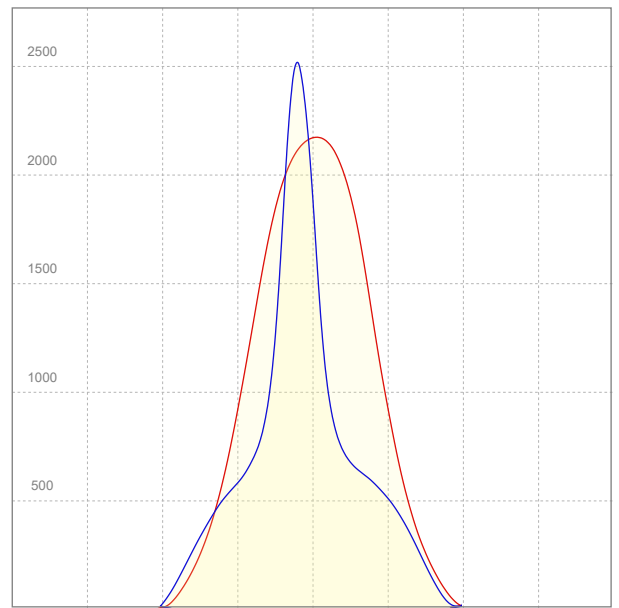
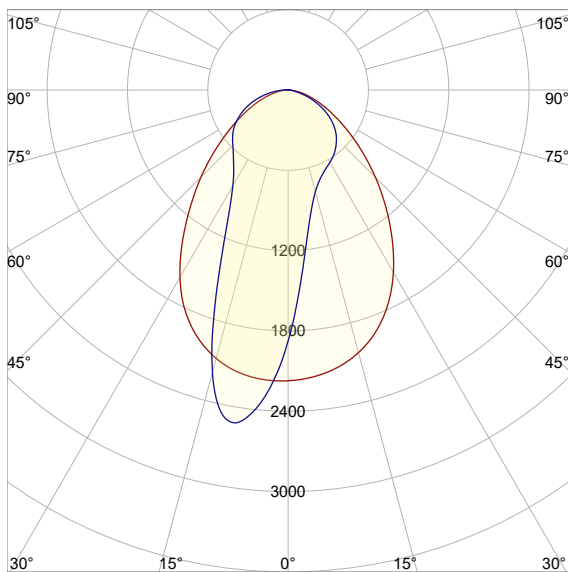
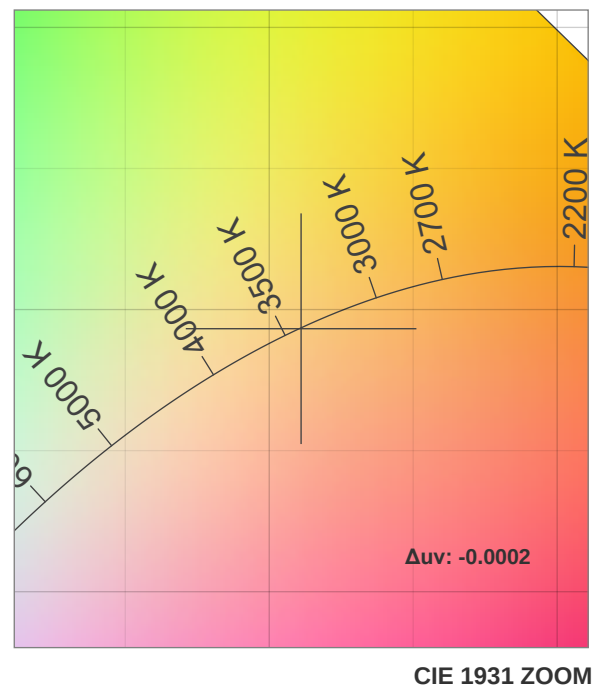


MICROSquare Graze 30° at 10°**MSQ140****Light efficiency:****130 Lumen/Watt****Light quality:****CRI: 81.9****Color temperature:****3401 K****Output: 3015 lm****Peak: 2518 cd****Power: 23.1 W****PF: 1.0**


No photo

**Product name:****MICROSquare Graze 30° at 10°****Item number:****MSQ140****Configuration:****MSQ140-4FT-3580-AL-DG3010-750LPF****Date and time:****8/6/2021 4:26:03 PM****Description:****Power Supply @ 610mA, With Lenticular**


Color Details

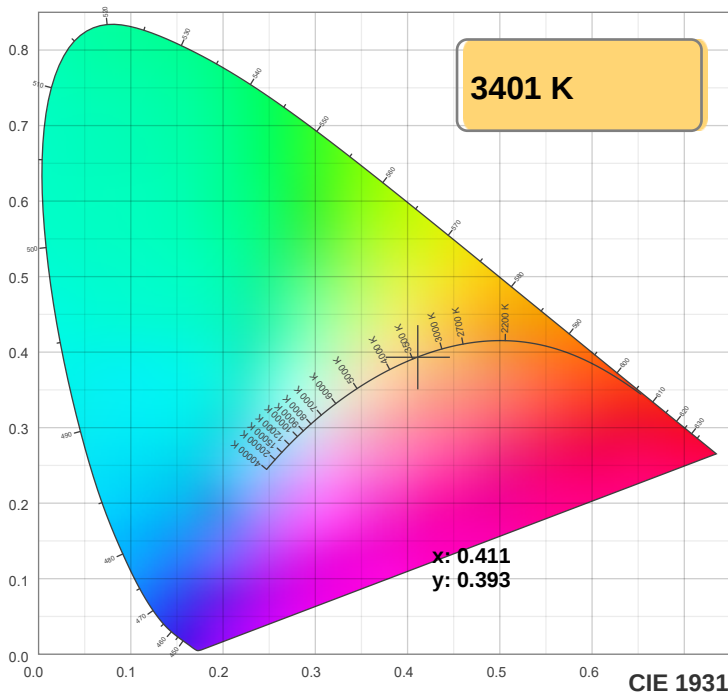

TM-30: 83.3

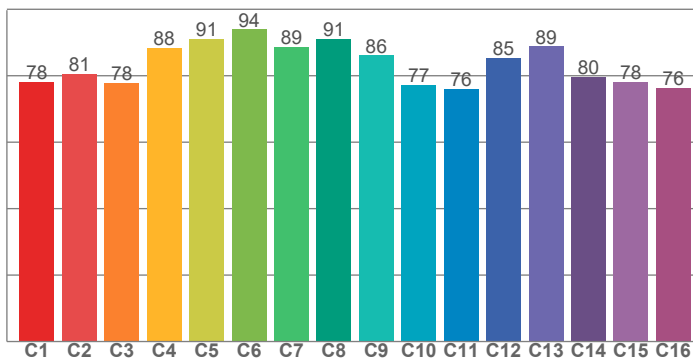

CRI: 81.9 (R1-R8)

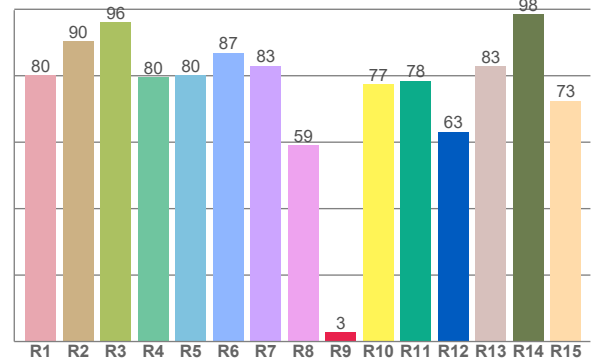

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80.2	90.4	96.1	79.6	80.1	87.0	83.0	59.2	2.9	77.4	78.4	63.1	82.9	98.5	72.5


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
78.2	80.6	77.9	88.4	91.2	93.9	88.7	91.1	86.1	77.3	76.1	85.3	88.8	79.7	78.2	76.4

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
78.6	96.6	79.9	75.6	80.0	81.9	83.1	86.5	96.8	89.3	85.1	82.6	81.6	70.0	73.1

CQS: 81.2

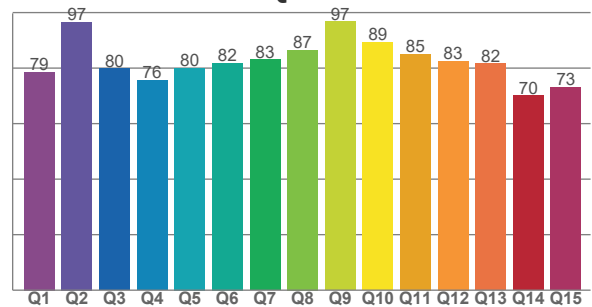

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3401 K	81.9	2.9	83.3	94.8	81.2	0.411	0.393	0.238	0.342	-0.0002

TM-30 Details







Rf 83.3

Fidelity index Rf


Rg 94.8

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	78	-13%	0%
2	81	-9%	7%
3	78	-3%	11%
4	88	-1%	6%
5	91	-1%	3%
6	94	1%	-2%
7	89	-6%	-4%
8	91	-5%	0%
9	86	-7%	7%
10	77	-6%	14%
11	76	2%	15%
12	85	8%	4%
13	89	5%	-6%
14	80	6%	-15%
15	78	-3%	-15%
16	76	-7%	-12%

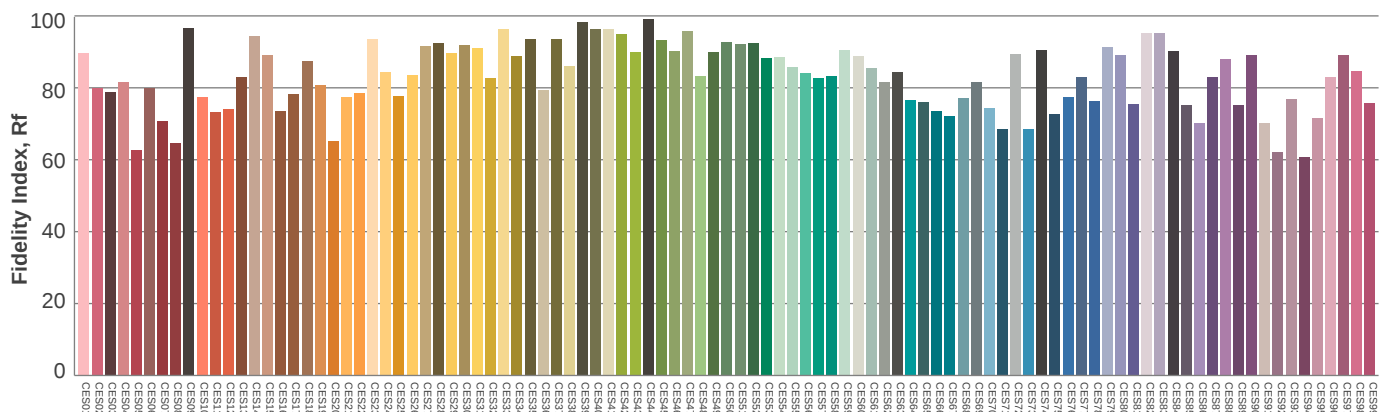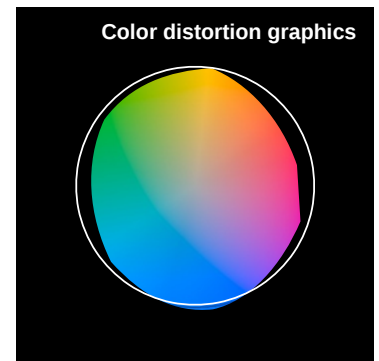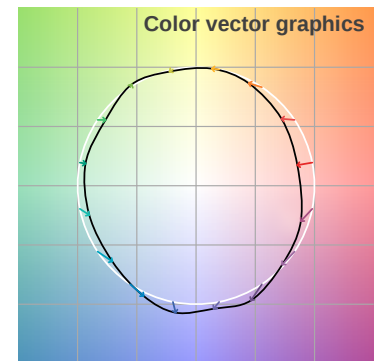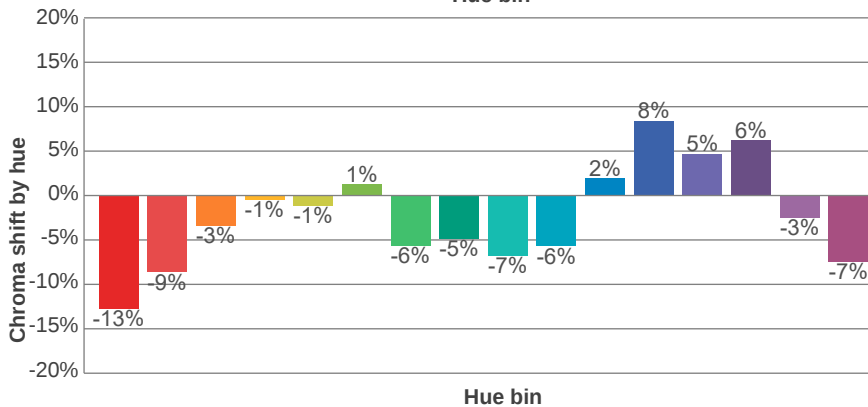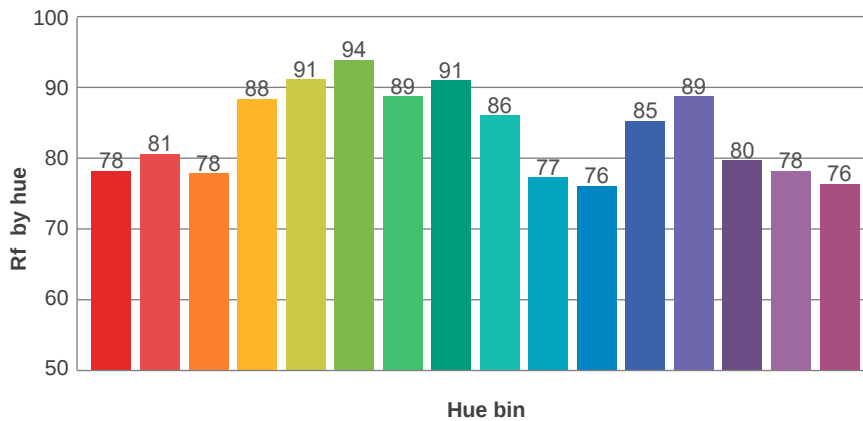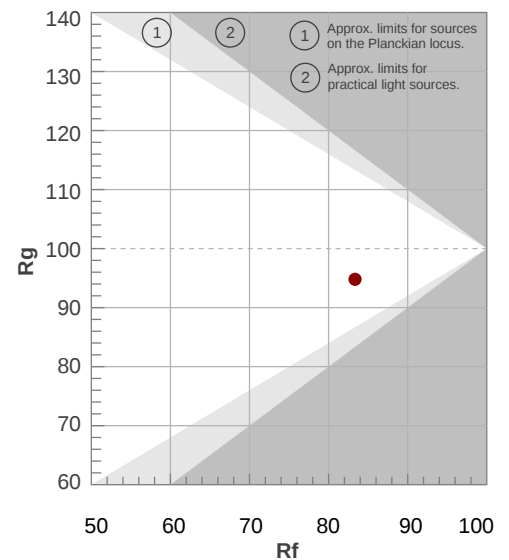

Beam details

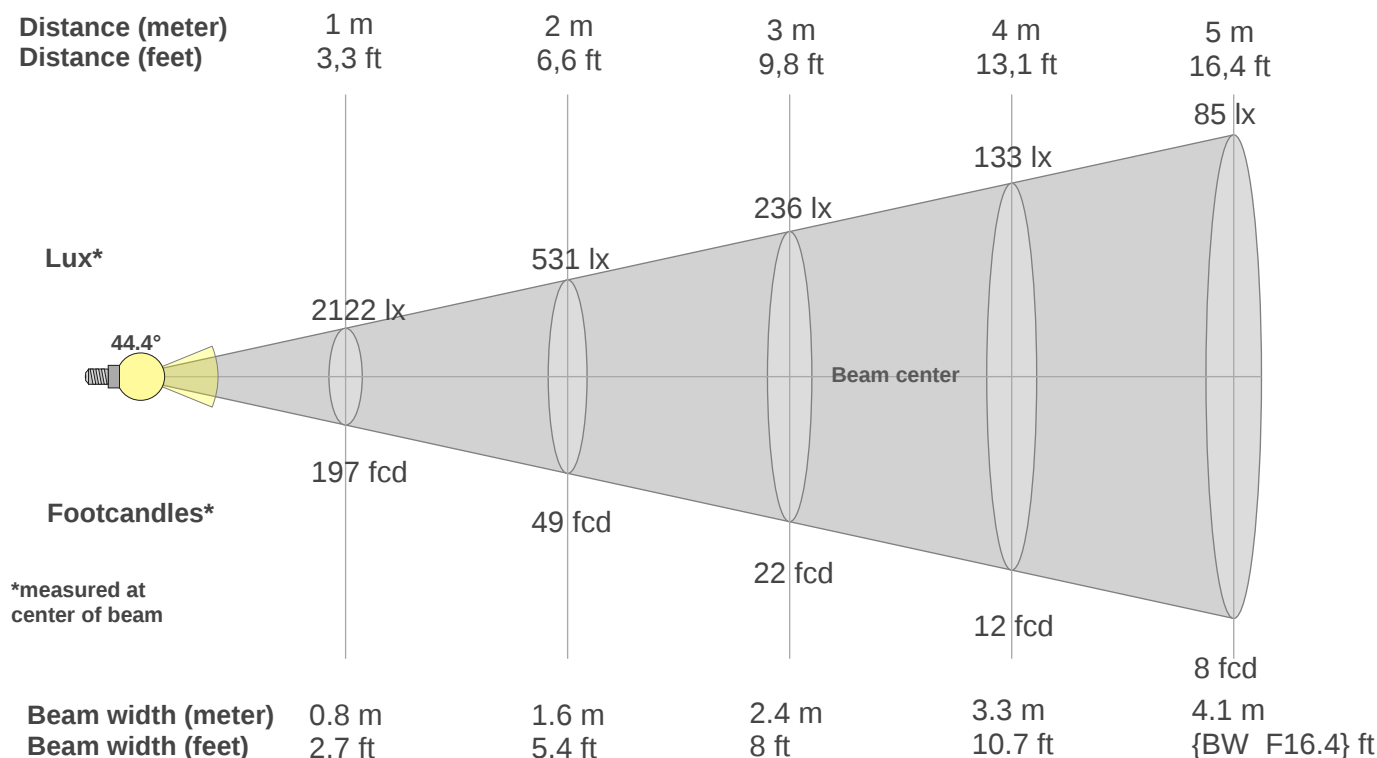

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2122lx	531lx	236lx	133lx	85lx	59lx	43lx	33lx	26lx	21lx	18lx	15lx	13lx	11lx	9lx	8lx	7lx	7lx	6lx	5lx
197.2fcd	49.3fcd	21.9fcd	12.3fcd	7.9fcd	5.5fcd	4fcd	3.1fcd	2.4fcd	2fcd	1.6fcd	1.4fcd	1.2fcd	1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd	0.5fcd	0.5fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
2122	2150	2105	2030	1918	1764	1572	1353	1132	922	728	559	418	304	212	138	77	32	10	0
100%	101%	99%	96%	90%	83%	74%	64%	53%	43%	34%	26%	20%	14%	10%	6%	4%	2%	0%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
2122	1316	960	789	704	656	624	592	554	510	457	394	321	241	163	94	40	17	0	0
100%	62%	45%	37%	33%	31%	29%	28%	26%	24%	22%	19%	15%	11%	8%	4%	2%	1%	0%	0%

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
2122	2169	2140	2074	1969	1817	1614	1374	1135	920	724	555	417	305	216	142	82	37	0	0
100%	102%	101%	98%	93%	86%	76%	65%	53%	43%	34%	26%	20%	14%	10%	7%	4%	2%	0%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
2122	2335	2499	2175	1547	1069	829	710	637	584	541	493	435	370	300	225	151	83	27	0
100%	110%	118%	102%	73%	50%	39%	33%	30%	28%	25%	23%	21%	17%	14%	11%	7%	4%	1%	0%

UGR

Glare evaluation according to UGR

p Ceiling	70	70	50	50	30	70	70	50	50	30
p Walls	50	30	50	30	30	50	30	50	30	30
p Floor	20	20	20	20	20	20	20	20	20	20
Room size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
Variation of the observer position for the luminaire distance S										
n/a	n/a					n/a				
n/a	n/a					n/a				
n/a	n/a					n/a				
CIE 117-1995. Corrected glare indices referring to 3015 lm total luminous flux										