

Light efficiency:

111 Lumen/Watt**Output: 3037 lm**




Light quality:

CRI: 81.8**Peak: 1044 cd**

Color temperature:

3358 K**Power: 27.4 W****PF: 1.0**

No photo

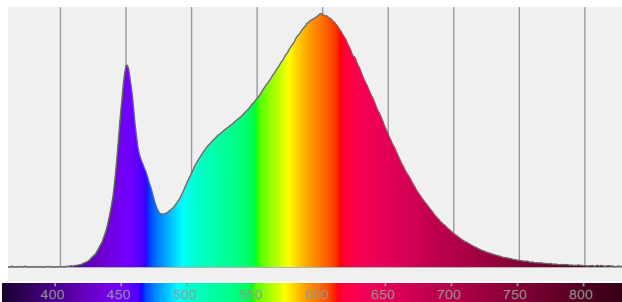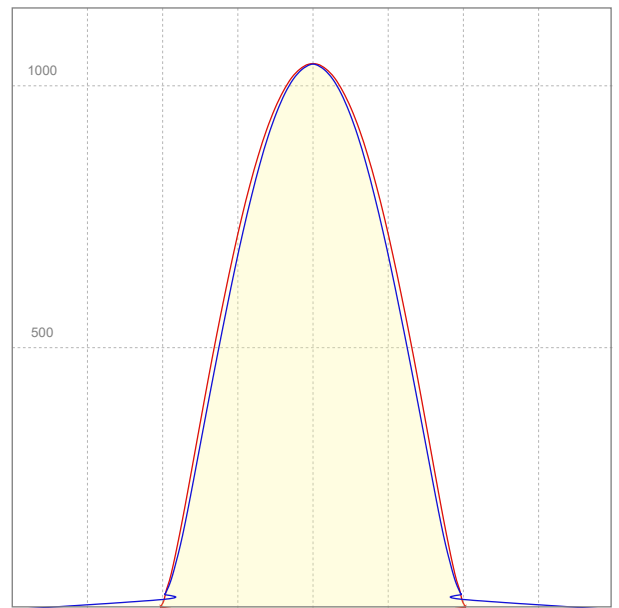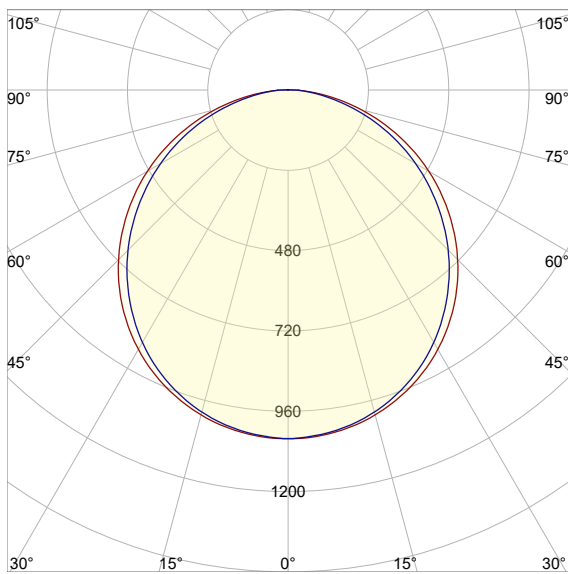

Product name:

NANOSquare Wide 110°

Item number:

NSQ95

Configuration:

NSQ95-4FT-3580-AL-DW110-750LPF



Date and time:

7/30/2021 3:54:21 PM

Description:


Power Supply @ 720mA

Color Details

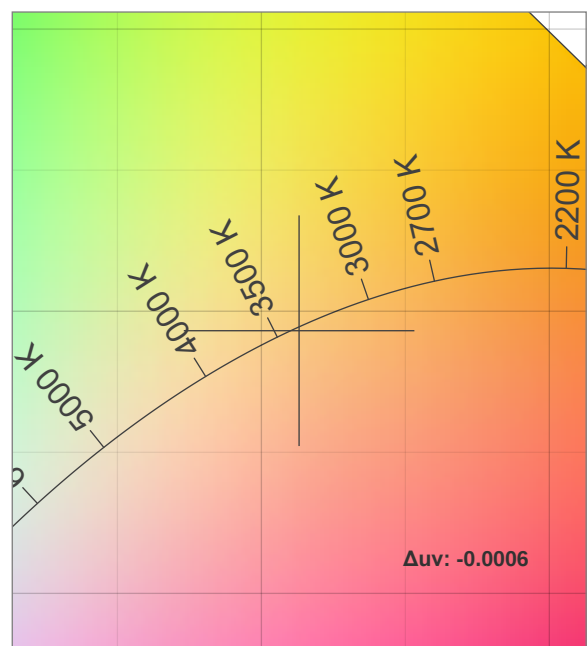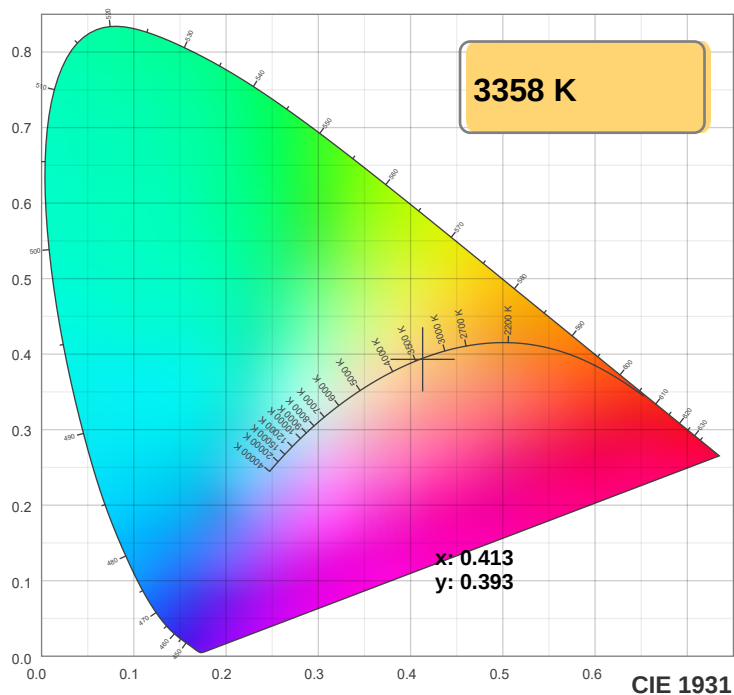


CIE 1931 ZOOM

TM-30: 83.6

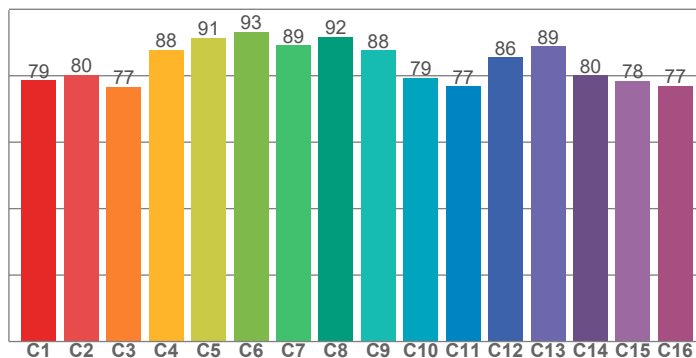

CRI: 81.8 (R1-R8)

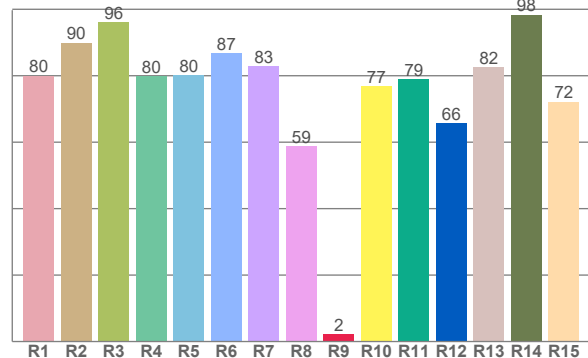

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80.0	90.0	96.1	79.9	80.1	86.8	82.9	58.8	2.1	76.8	79.0	65.7	82.5	98.4	72.2


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
78.6	80.3	76.7	87.8	91.5	93.2	89.2	91.7	87.6	79.4	76.8	85.6	88.8	80.1	78.4	77.0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
78.2	96.8	79.8	76.5	80.8	82.2	82.9	86.1	96.6	88.6	84.5	81.9	81.0	69.5	72.5

CQS: 81.0

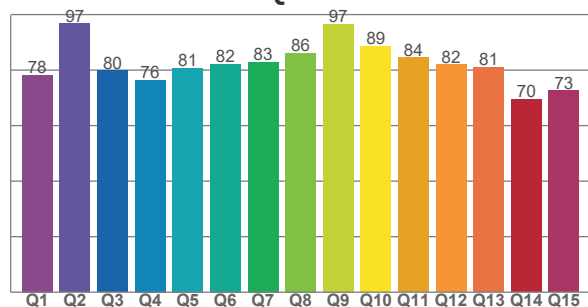

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3358 K	81.8	2.1	83.6	95.6	81.0	0.413	0.393	0.240	0.342	-0.0006

TM-30 Details







Rf 83.6

Fidelity index Rf


Rg 95.6

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	79	-13%	0%
2	80	-9%	7%
3	77	-3%	12%
4	88	1%	7%
5	91	1%	4%
6	93	3%	-3%
7	89	-4%	-5%
8	92	-4%	-1%
9	88	-7%	5%
10	79	-6%	12%
11	77	1%	14%
12	86	8%	4%
13	89	5%	-5%
14	80	7%	-15%
15	78	-2%	-15%
16	77	-7%	-12%

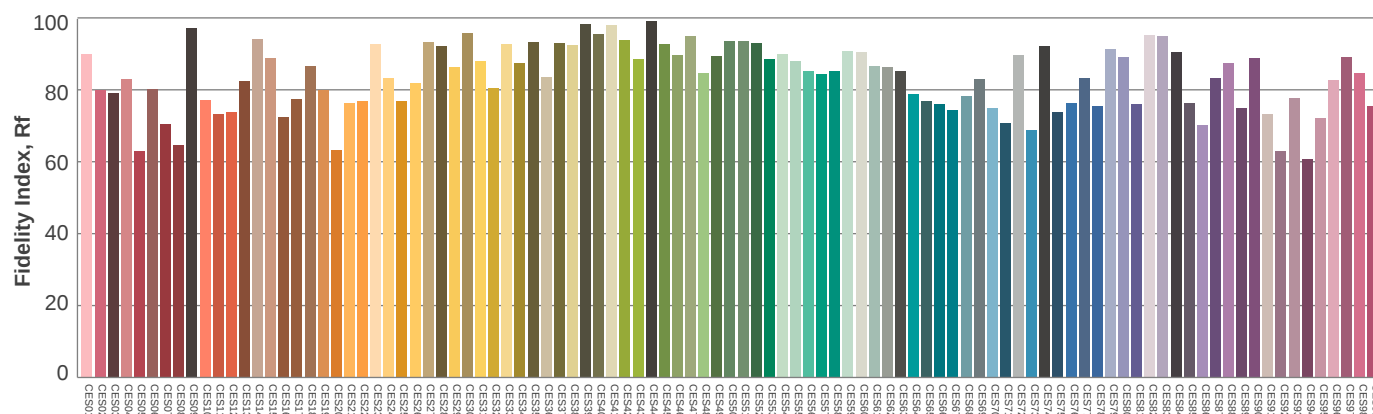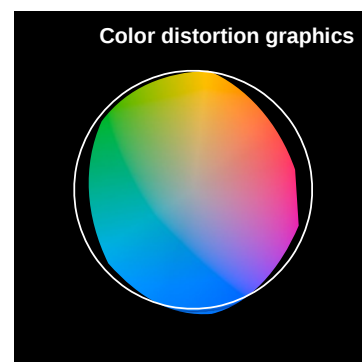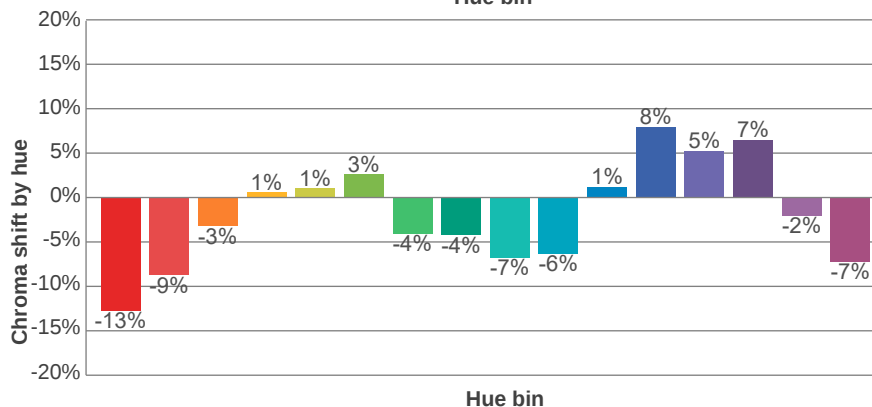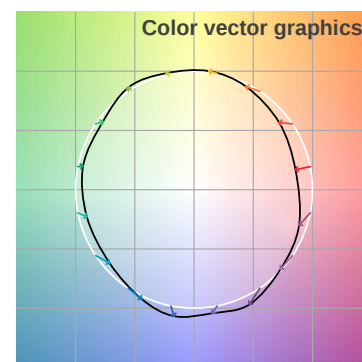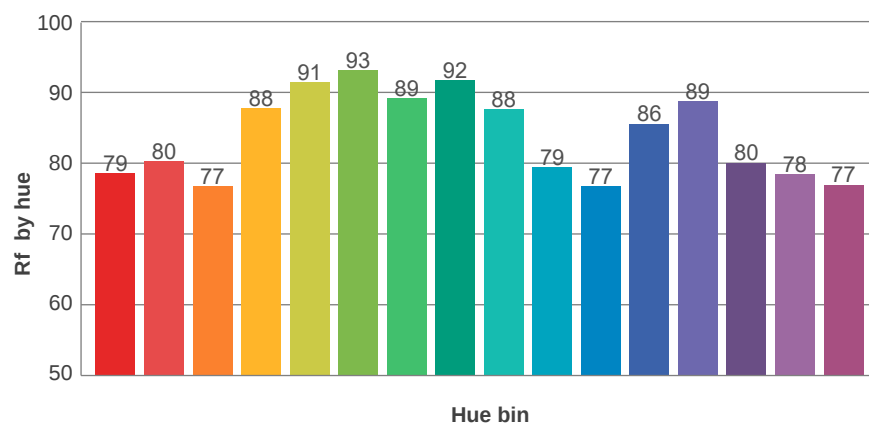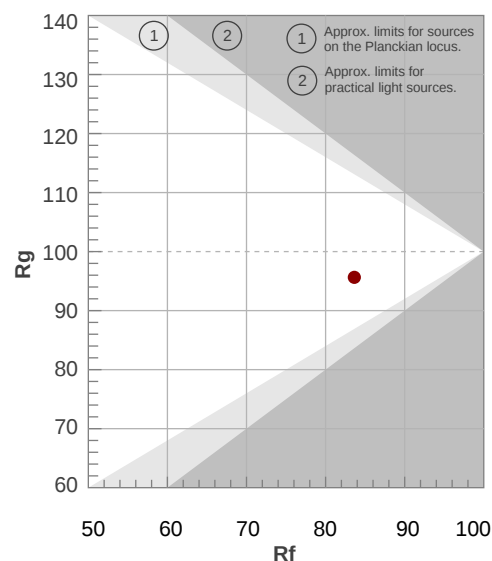

Beam details

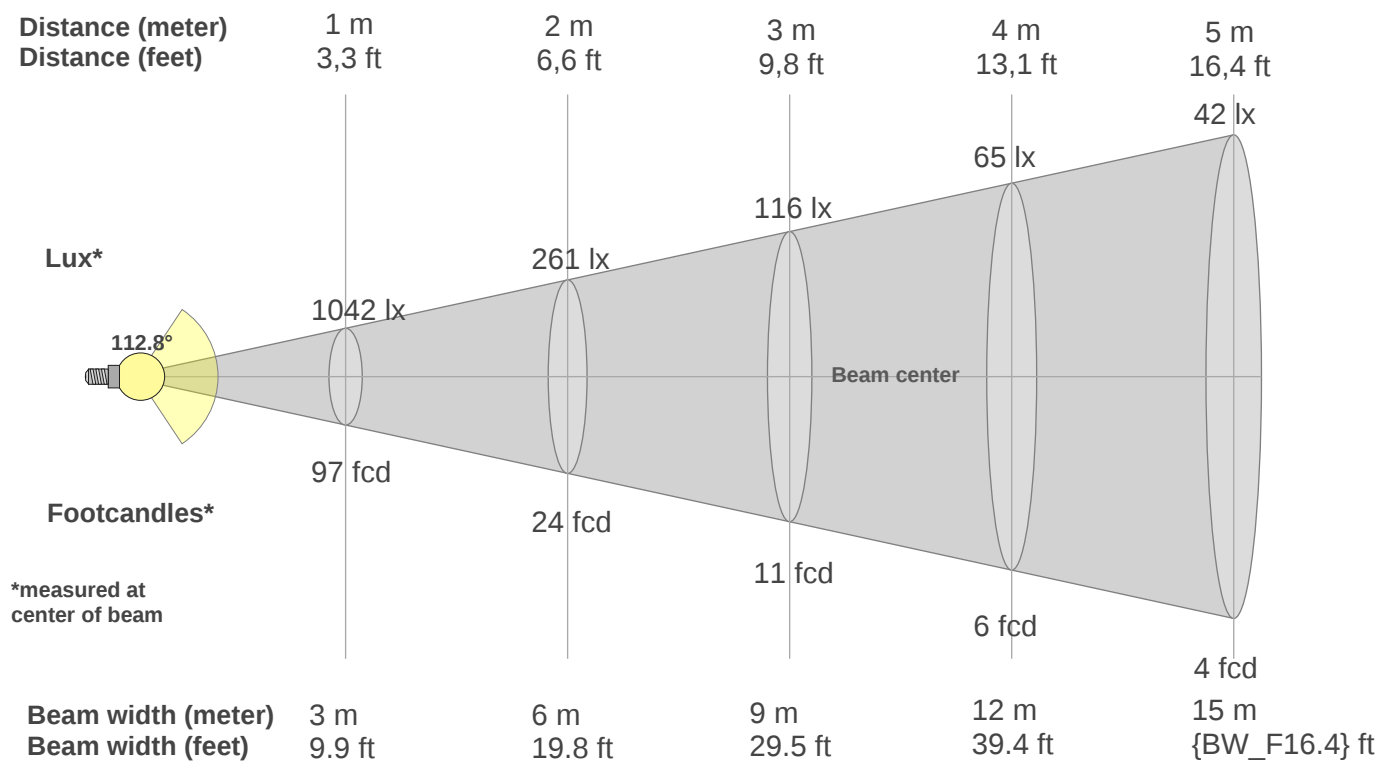

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1042lx	261lx	116lx	65lx	42lx	29lx	21lx	16lx	13lx	10lx	9lx	7lx	6lx	5lx	5lx	4lx	4lx	3lx	3lx	3lx
96.8fcd	24.2fcd	10.8fcd	6.1fcd	3.9fcd	2.7fcd	2fcd	1.5fcd	1.2fcd	1fcd	0.8fcd	0.7fcd	0.6fcd	0.5fcd	0.4fcd	0.4fcd	0.3fcd	0.3fcd	0.3fcd	0.2fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1042	1037	1025	1004	975	938	894	842	782	716	643	566	485	400	312	225	141	67	12	0
100%	99%	98%	96%	94%	90%	86%	81%	75%	69%	62%	54%	47%	38%	30%	22%	14%	6%	1%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1042	1034	1019	995	962	920	870	811	746	676	600	521	440	357	272	189	115	56	19	18
100%	99%	98%	95%	92%	88%	83%	78%	72%	65%	58%	50%	42%	34%	26%	18%	11%	5%	2%	2%

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1042	1037	1025	1004	975	938	894	842	782	716	643	566	485	400	312	225	141	67	12	0
100%	99%	98%	96%	94%	90%	86%	81%	75%	69%	62%	54%	47%	38%	30%	22%	14%	6%	1%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
1042	1034	1019	995	962	920	870	811	746	676	600	521	440	357	272	189	115	56	19	18
100%	99%	98%	95%	92%	88%	83%	78%	72%	65%	58%	50%	42%	34%	26%	18%	11%	5%	2%	2%

UGR

Glare evaluation according to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	25.6	26.9	25.9	27.2	27.4	25.3	26.5	25.5	26.8	27.1
	3H	27.2	28.5	27.6	28.8	29.0	26.7	28.0	27.1	28.3	28.5
	4H	27.9	29.1	28.3	29.4	29.7	27.3	28.6	27.7	28.8	29.1
	6H	28.5	29.6	28.8	29.9	30.2	27.9	28.9	28.2	29.2	29.6
	8H	28.7	29.7	29.0	30.0	30.5	28.0	29.0	28.3	29.4	29.8
	12H	28.8	29.8	29.2	30.2	30.6	28.1	29.1	28.5	29.5	29.9
4H	2H	26.2	27.4	26.6	27.7	28.0	25.9	27.2	26.3	27.4	27.7
	3H	28.1	29.1	28.5	29.4	29.9	27.7	28.7	28.1	29.0	29.5
	4H	28.8	29.8	29.3	30.2	30.7	28.4	29.3	28.8	29.7	30.2
	6H	29.5	30.4	30.0	30.8	31.1	28.9	29.8	29.4	30.2	30.5
	8H	29.8	30.6	30.3	30.9	31.3	29.1	29.9	29.6	30.3	30.7
	12H	29.9	30.6	30.4	31.0	31.5	29.3	30.0	29.8	30.4	30.9
8H	4H	29.1	29.9	29.6	30.3	30.7	28.7	29.5	29.2	29.9	30.2
	6H	29.9	30.6	30.4	31.0	31.6	29.4	30.0	29.9	30.5	31.0
	8H	30.3	30.8	30.8	31.3	32.0	29.7	30.3	30.2	30.8	31.4
	12H	30.6	31.0	31.1	31.5	32.1	29.9	30.4	30.5	30.9	31.5
12H	4H	29.1	29.8	29.6	30.2	30.7	28.7	29.4	29.2	29.8	30.3
	6H	30.0	30.5	30.5	31.1	31.7	29.5	30.0	30.0	30.6	31.2
	8H	30.4	30.8	31.0	31.3	31.9	29.8	30.3	30.4	30.8	31.4
Variation of the observer position for the luminaire distance S											
S = 1.0H		0.1 / -0.1					0.1 / -0.1				
S = 1.5H		0.1 / -0.2					0.1 / -0.2				
S = 2.0H		0.4 / -0.4					0.4 / -0.5				
CIE 117-1995. Corrected glare indices referring to 3037 lm total luminous flux											