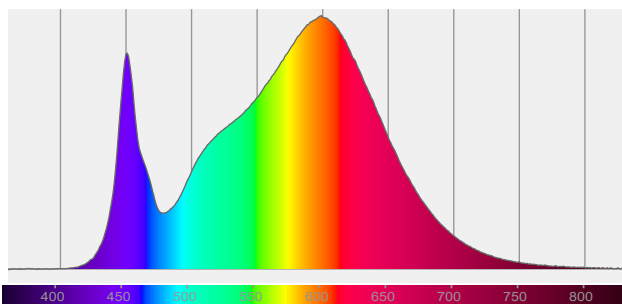
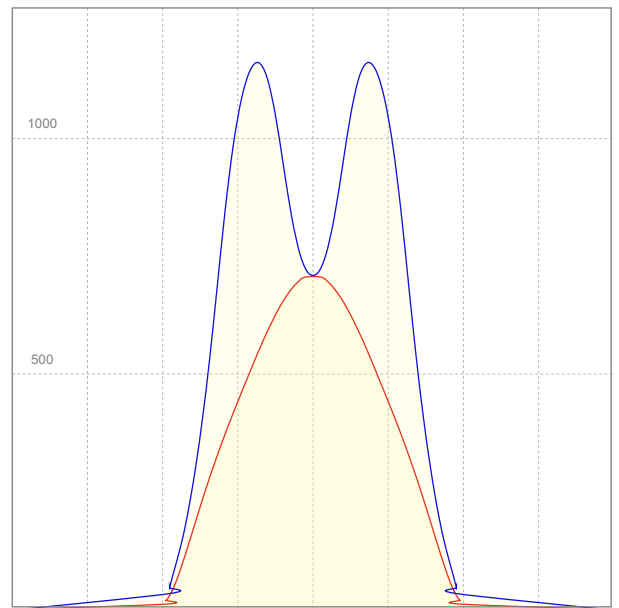
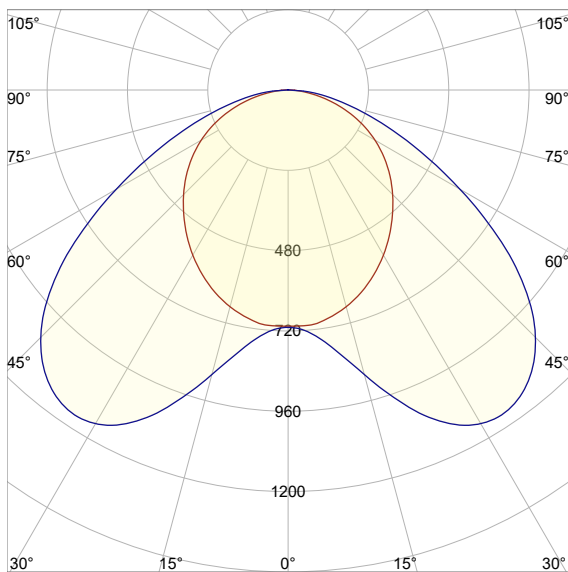


NANOSquare Double Asymmetric 70°



NSQ95

Light efficiency:**122 Lumen/Watt****Light quality:****CRI: 82.3****Color temperature:****3430 K****Output: 3025 lm****Peak: 1161 cd****Power: 24.7 W****PF: 1.0**


No photo

**Product name:****NANOSquare Double Asymmetric 70°****Item number:****NSQ95****Configuration:****NSQ95-4FT-3580-WT-DDA70-750LPF****Date and time:****7/30/2021 12:06:49 PM****Description:****Power Supply @ 660mA**


Color Details

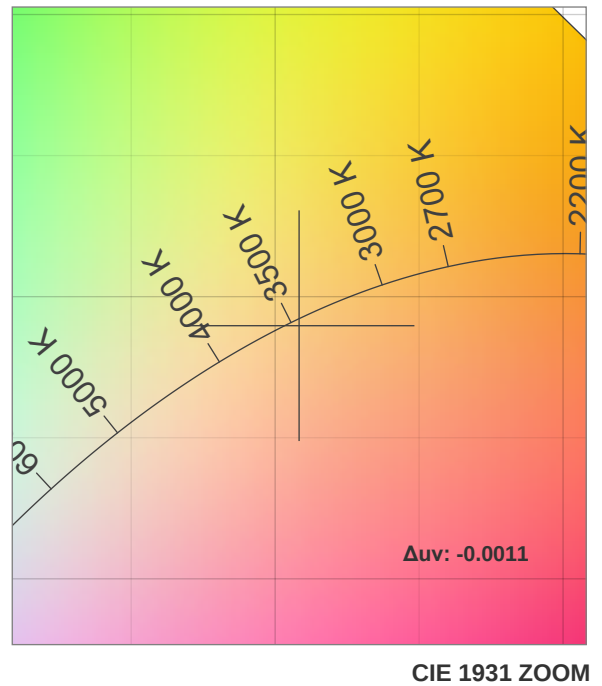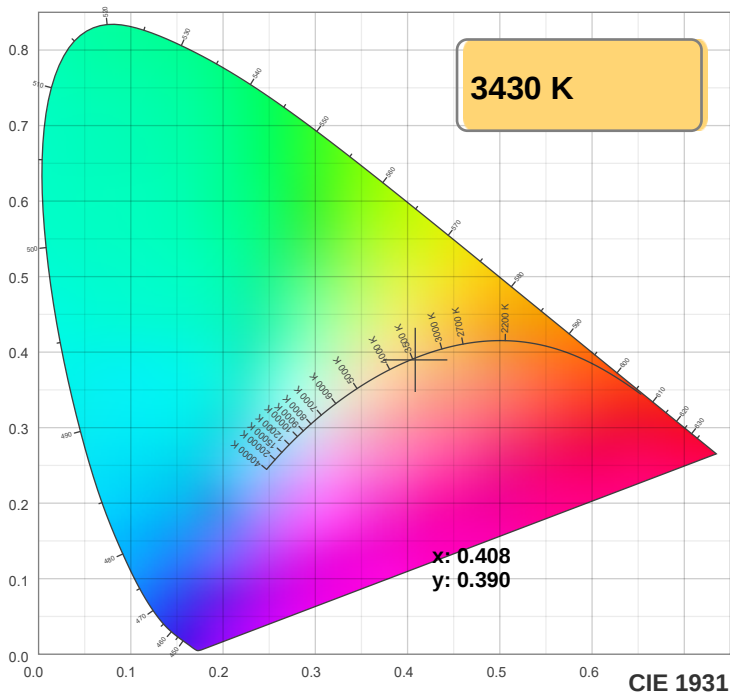

TM-30: 83.8

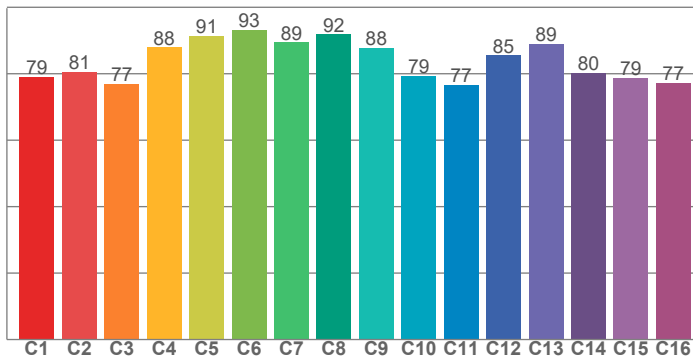

CRI: 82.3 (R1-R8)

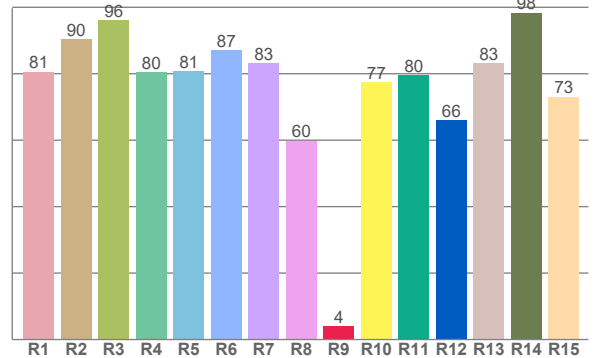

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80.6	90.3	96.0	80.4	80.8	87.0	83.2	59.8	4.0	77.5	79.6	65.9	83.1	98.4	73.1


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
79.0	80.6	77.0	87.9	91.4	93.3	89.4	91.9	87.7	79.5	76.7	85.5	89.0	80.4	78.8	77.2

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
79.0	97.4	79.8	76.6	81.2	82.8	83.5	86.6	97.1	88.8	84.7	82.2	81.4	70.2	73.3

CQS: 81.5

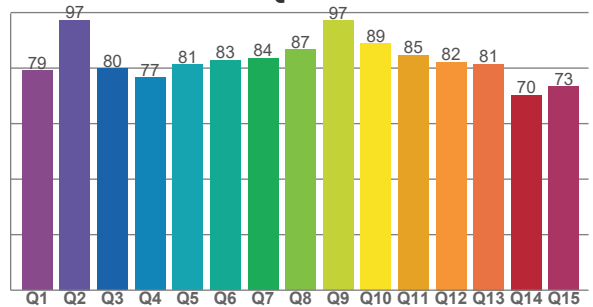

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3430 K	82.3	4.0	83.8	95.8	81.5	0.408	0.390	0.238	0.341	-0.0011

TM-30 Details







Rf 83.8

Fidelity index Rf


Rg 95.8

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	79	-13%	0%
2	81	-9%	7%
3	77	-3%	12%
4	88	1%	7%
5	91	1%	4%
6	93	3%	-2%
7	89	-4%	-5%
8	92	-4%	-1%
9	88	-7%	5%
10	79	-6%	12%
11	77	1%	14%
12	85	8%	4%
13	89	5%	-5%
14	80	7%	-15%
15	79	-2%	-15%
16	77	-7%	-12%

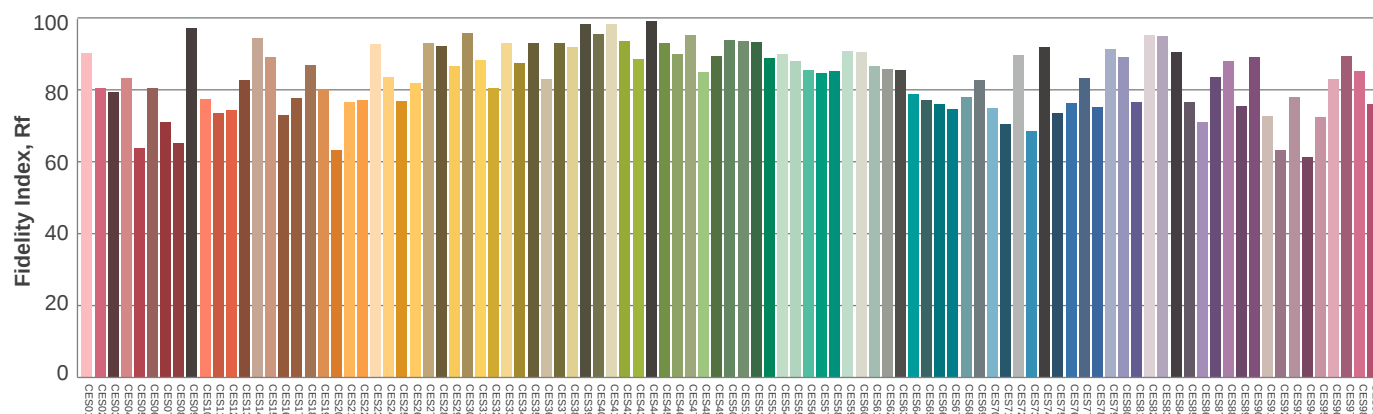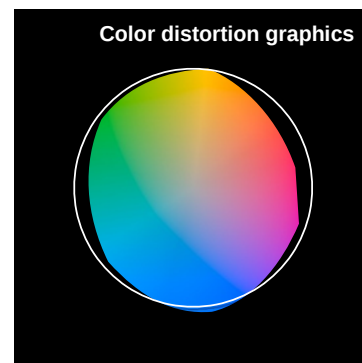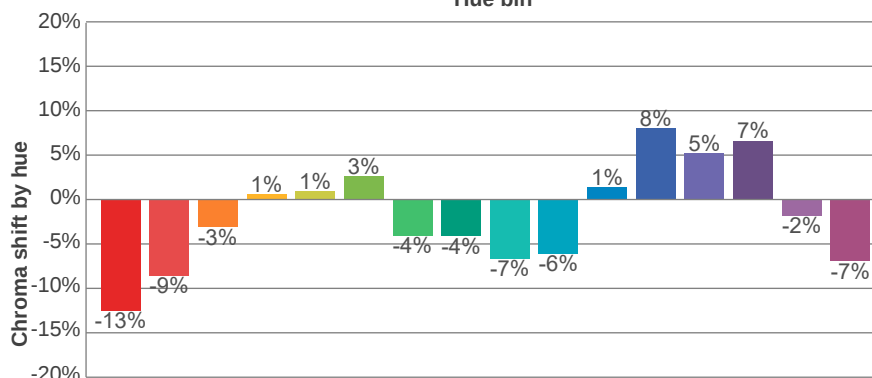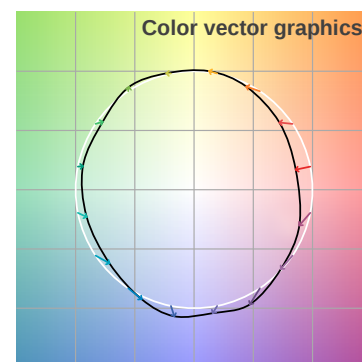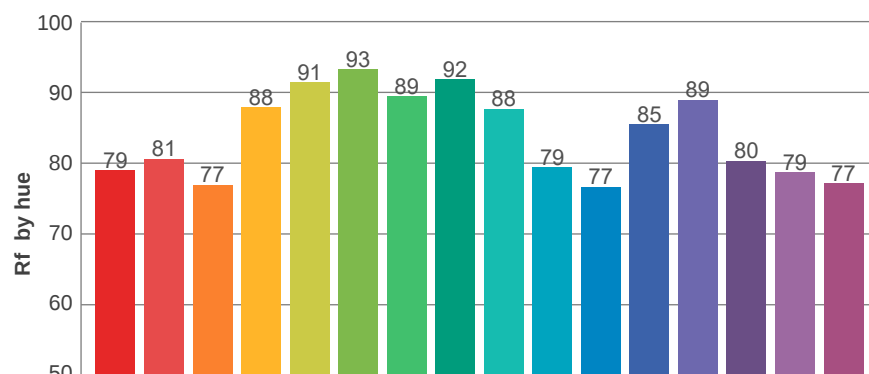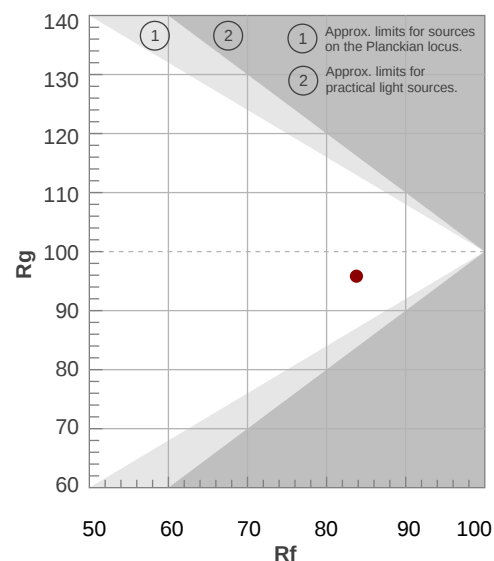

Beam details

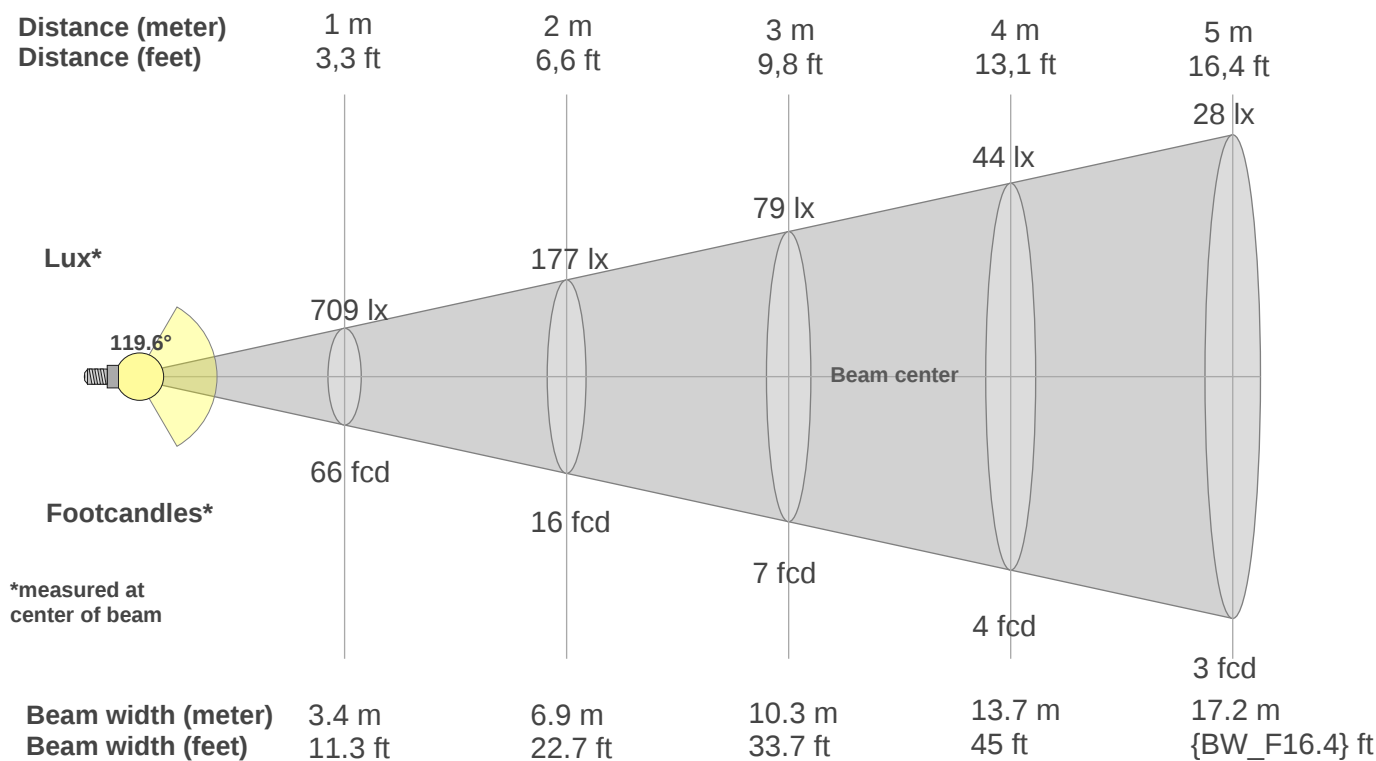

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
709lx	177lx	79lx	44lx	28lx	20lx	14lx	11lx	9lx	7lx	6lx	5lx	4lx	4lx	3lx	3lx	2lx	2lx	2lx	2lx
65.9fcd	16.5fcd	7.3fcd	4.1fcd	2.6fcd	1.8fcd	1.3fcd	1fcd	0.8fcd	0.7fcd	0.5fcd	0.5fcd	0.4fcd	0.3fcd	0.3fcd	0.3fcd	0.2fcd	0.2fcd	0.2fcd	0.2fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
709	705	692	670	642	607	570	528	485	442	397	349	299	246	190	132	78	35	11	11
100%	99%	98%	94%	90%	86%	80%	74%	68%	62%	56%	49%	42%	35%	27%	19%	11%	5%	2%	1%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
709	732	790	883	993	1089	1145	1153	1117	1040	921	765	595	439	308	204	124	57	32	30
100%	103%	111%	124%	140%	154%	161%	163%	157%	147%	130%	108%	84%	62%	43%	29%	17%	8%	5%	4%

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
709	705	692	670	642	607	570	528	485	442	397	349	299	246	190	132	78	35	11	11
100%	99%	98%	94%	90%	86%	80%	74%	68%	62%	56%	49%	42%	35%	27%	19%	11%	5%	2%	1%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
709	732	790	883	993	1089	1145	1153	1117	1040	921	765	595	439	308	204	124	57	32	30
100%	103%	111%	124%	140%	154%	161%	163%	157%	147%	130%	108%	84%	62%	43%	29%	17%	8%	5%	4%

UGR

Glare evaluation according to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	23.9	25.1	24.1	25.4	25.7	27.5	28.7	27.7	29.1	29.3
	3H	25.1	26.4	25.5	26.7	26.9	28.6	29.9	29.0	30.2	30.4
	4H	25.6	26.9	26.0	27.1	27.4	29.0	30.3	29.4	30.5	30.8
	6H	26.1	27.2	26.4	27.4	27.8	29.4	30.5	29.7	30.7	31.1
	8H	26.2	27.2	26.5	27.5	28.0	29.5	30.5	29.8	30.8	31.3
	12H	26.2	27.3	26.6	27.6	28.0	29.5	30.6	29.9	30.9	31.3
4H	2H	25.1	26.3	25.5	26.6	26.9	27.8	29.0	28.2	29.3	29.6
	3H	26.5	27.6	26.9	27.9	28.4	29.3	30.3	29.7	30.6	31.1
	4H	27.1	28.0	27.5	28.4	29.0	29.8	30.7	30.2	31.1	31.7
	6H	27.5	28.4	28.0	28.8	29.1	30.2	31.1	30.7	31.4	31.8
	8H	27.6	28.5	28.1	28.8	29.2	30.3	31.2	30.9	31.5	31.9
	12H	27.7	28.4	28.2	28.8	29.3	30.5	31.1	31.0	31.6	32.0
8H	4H	27.5	28.3	28.0	28.7	29.1	29.9	30.7	30.4	31.1	31.5
	6H	28.1	28.7	28.6	29.2	29.7	30.5	31.1	31.0	31.6	32.1
	8H	28.3	28.9	28.9	29.4	30.0	30.7	31.3	31.3	31.8	32.4
	12H	28.5	29.0	29.1	29.5	30.1	30.9	31.4	31.5	31.9	32.5
12H	4H	27.6	28.2	28.1	28.7	29.1	29.9	30.6	30.4	31.0	31.5
	6H	28.2	28.8	28.7	29.3	29.9	30.5	31.1	31.0	31.6	32.2
	8H	28.5	28.9	29.1	29.4	30.1	30.8	31.3	31.4	31.8	32.4
Variation of the observer position for the luminaire distance S											
S = 1.0H		0.2 / -0.2					0.1 / -0.1				
S = 1.5H		0.3 / -0.4					0.2 / -0.4				
S = 2.0H		0.6 / -0.8					0.7 / -0.8				
CIE 117-1995. Corrected glare indices referring to 3025 lm total luminous flux											