

EDGESolo200 Wall

2.00" Edge-Lit Linear LED Wall Mount



Remote Driver

Features & Benefits

Exceptional Performance
Up to 1,000 lm/ft, 135 lm/W efficacy

Wide Range of LED Selections
Static and Tunable White

Designed with Options
Wide choice of SmartOptic® lenses, beam distributions, 80/90/95+ CRI, 2200K to 5000K CCT, and 0-10V, DALI, DMX, and TRIAC dimming

Patented Innovations
Fusion® Optix Inside with unique SmartBeam® capabilities

Proprietary Optical Components
Provides excellent light distribution and high-transmission

Committed to Sustainability
Declare Listed and Red Free List materials

Compliance
UL Listed, Dry and Damp Locations

5-Year Warranty
Standard 5-year warranty, 50,000 hours

Designed & Built in
BOSTON

Declare



FIXTURE ORDERING

Project Name

1) FIXTURE DESIGN

Fixture Type

PRODUCT	STYLE	LENGTH	COLOR + FINISH	END CAP
ESO200-W				
2.00" Edge-Lit	FM Flush Mount	2 2'	MWH Matte White (RAL9003)	E1 Flat End Cap
Linear LED	SM Shelf Mount	4 4'	MBK Matte Black (RAL9005)	E2 Chamfered End Cap
Wall Mount		6 6'	MGR Matte Gray (RAL7001)	
		8 8'	CAE Clear Anodized Effect	
		10 10'	RAL_ Specify RAL#	
		X_ Specify X, Y"		

2) LED LIGHT ENGINE

CRI	CCT	DIRECT OPTICS	DIRECT OUTPUT	INDIRECT OPTICS	INDIRECT OUTPUT
S80 Std. 80 CRI	22 2200K	DFL-DLAM Lambertian	35 350 lm/ft	NN Not Needed	NN Not Needed
S90 Std. 90 CRI	27 2700K	DFL-BW65 Batwing 65°	50 500 lm/ft	ILAM Lambertian	35 350 lm/ft
HE80 High-Eff. 80 CRI	30 3000K	DFL-A5025 Asymmetric 50° at 25° Tilt	75 750 lm/ft	IBW120 Batwing 120°	50 500 lm/ft
HE90 High-Eff. 90 CRI	35 3500K		100 1,000 lm/ft	IFT150 FlatTop 150°	75 750 lm/ft
HD95 High-Def. 95 CRI	40 4000K		X_ Specify lm/ft	IA6040 Asymmetric 60° at 40° Tilt	100 1,000 lm/ft
SUN Full SunLike	50 5000K	X_ Specify Beam		IA4560 Asymmetric 45° at 60° Tilt	X_ Specify lm/ft
	X_ Specify CCT			X_ Specify Beam	

3) FIXTURE POWER & CONTROLS

LINE VOLTAGE (DC)	REMOTE DRIVER (POWER)	REMOTE DRIVER BOX ¹	EMERGENCY BACKUP	CONTROL SYSTEM ³
UNV 120/277V	FDND Factory Non-Dimming	NN Not Needed	NN Not Needed	NN Not Needed
347 347V	FD01 Factory 0-10V 1% Dim	RLDB² Remote Linear Driver Box (driver included by default)	EMC Emergency Circuit	LUT Lutron
	FD10 Factory 0-10V 10% Dim	RX2D² Optional Remote XBox2 Driver, Up to 2 Drivers	EMB Emergency Battery (10 W — Remote)	COO Cooper
	FDDA Factory DALI 0.1% Dim	RX3D² Optional Remote XBox3 Driver, Up to 3 Drivers	X_ Specify Backup	CAS Casambi
	FDDX Factory DMX Dim	RX5D² Optional Remote XBox5 Driver, Up to 5 Drivers		X_ Specify Control System
	FDTR Factory TRIAC Dim			
	LD01 Lutron Hi-Lume 1% Dim			
	LD05 Lutron 5-Series 5% Dim			
	ED00 eldoLED 0-10V 0.1% Dim			
	ED01 eldoLED 0-10V 1% Dim			
	EDDA eldoLED DALI 0.1% Dim			
	X_ Specify Driver			

4) ACCESSORIES

MOUNTING HARDWARE & BAFFLES

SWMB	Stainless Steel Wall Mounting Bracket
BLB	Black Linear Baffle
SHB	Silver Honeycomb Baffle


Footnotes: ¹ Remote distance is dependent on driver type, up to 100' (30.5 m). ² Creates a clean and organized power solution for multiple fixture installations. ³ The control system and driver must be compatible.

FIXTURE DESIGN

Choice of mounting styles




To download BIM (Revit) Files, please click or scan the QR Code.



Flush Mount

Back of fixture install flush to wall



Shelf Mount

Edge of fixture mounts to wall creating shelf

OPTICS & BAFFLES



Flush Lens



Regressed Lens



Black Linear Baffle



Silver Honeycomb Baffle

FIXTURE MOUNTING & CONNECTIONS

Mounting Type

Wall Mount

Installs onto a wall. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements.

Mounting Kit

Wall Mounting Bracket

Stainless Steel

Power Feed

Power Whip

12"

Mounting Options

SMARTBEAM® TECHNOLOGY

The Ultimate Control of Lighting Distributions

SmartBeam makes it easy to specify the exact light required for any architectural space. Available in every XICO product; it is now possible to create truly tailored and engaging lighting that transform spaces, improves visual comfort, and saves energy.


To learn more about our SmartBeam Technology, please click or scan the QR Code.



DIRECT PHOTOMETRICS


Static White Light

DLAM: Lambertian




Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	3,000
lm/ft	746
Watts	27
W/ft	6.8
LPW	110

DBW65: Batwing 65°



Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	3,000
lm/ft	743
Watts	27
W/ft	6.8
LPW	109

DA5025: Asymmetric 50° at 25° Tilt




Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	3,000
lm/ft	738
Watts	10.5
W/ft	5.3
LPW	141

INDIRECT PHOTOMETRICS


Static White Light

ILAM: Lambertian




Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	4,000
lm/ft	1,000
Watts	28
W/ft	7
LPW	150

IBW120: Batwing 120°




Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	4,000
lm/ft	1,017
Watts	25
W/ft	6.3
LPW	162

IFT150: FlatTop 150°




Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	4,000
lm/ft	1,004
Watts	26
W/ft	6.5
LPW	155

IA6040: Asymmetric 60° at 40° Tilt



Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	4,000
lm/ft	991
Watts	28
W/ft	7
LPW	143


IA4560: Asymmetric 45° at 60° Tilt




Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	4,000
lm/ft	991
Watts	28
W/ft	7
LPW	143

LED SELECTION GUIDE


S80: Standard 80+ CRI

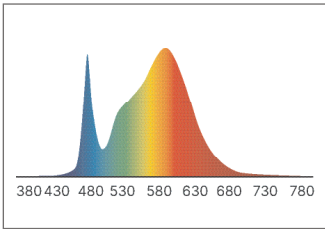


S90: Standard 90+ CRI




HE80: High-Efficiency 80+ CRI




HE90: High-Efficiency 90+ CRI

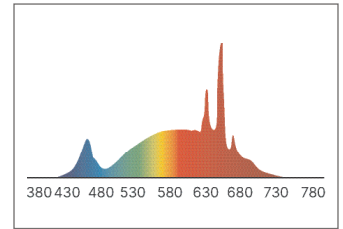


HD95: High-Definition 95+ CRI

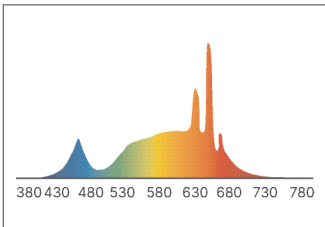


SUN: Full Spectrum "SunLike"



HCD: Human Centric Day



HCN: Human Centric Night

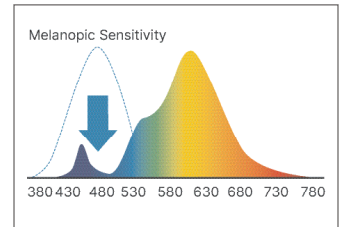

Static White Light (LED Light Engine Only)

CODE	DESCRIPTION	TYPICAL LED DATA							
		CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	M/P Ratio	LPW
S80	Standard 80 CRI	3500K	82.5	7.8	84	96.7	82.5	0.51	190
S90	Standard 90 CRI	3500K	91	54.3	89.3	98.9	89.2	0.55	175
HE80	High Efficiency 80 CRI	3500K	82.1	5.9	83	94.2	81.2	0.52	210
HE90	High Efficiency 90 CRI	3500K	92.2	90	90.7	103.8	92.1	0.56	190
HD95	High Definition 95 CRI	3500K	97.1	95	-	-	-	0.70	163
SUN	Full Spectrum SunLike®	3500K	95	85	-	-	-	-	130
HCD	Human Centric Day	4000K	83	95	-	-	-	0.92	155
HCN	Human Centric Night	2700K	80	-	-	-	-	0.44	134

LPW Efficacy Conversion Chart

CODE	CCT SELECTED							
	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
S80	-	0.91	0.96	1.00	1.04	1.11	1.11	1.11
S90	-	0.91	0.96	1.00	1.04	1.11	1.11	1.11
HE80	-	0.96	0.99	1.00	1.03	1.04	1.03	1.03
HE90	-	0.91	0.96	1.00	1.04	1.11	N/A	N/A
HD95	-	0.91	0.96	1.00	1.04	1.11	1.03	1.04
SUN95	-	0.90	0.92	1.00	1.01	1.07	1.04	1.05
HCD	-	N/A	0.96	1.00	1.04	1.04	1.04	1.04
HCN	-	0.87	0.96	1.00	1.04	N/A	N/A	N/A

BIOS TECHNOLOGY

Choosing Your BIOS Solution


BIOS is offered in four Circadian LED Solutions with BIOS SkyBlue Technology — Biological Static, Biological Dynamic, Biological Tunable, and Biological Dim-to-Warm. BIOS SkyBlue™ Technology includes a blue peak at 490nm that provides an effective daytime circadian signal using standard architectural color temperatures.




To learn more about BIOS Technology, please click or scan the QR Code.




BIOS Static




BIOS Dynamic



BIOS Tunable



BIOS Dim-to-Warm



Daytime

No color change when dimmed

Spaces that operate during daytime hours — 7am and 7pm

Daytime & Evening

500K shift when dimmed

Spaces that operate overnight — after 7pm and before 7am

Daytime & Evening

Dims to 2700K

Spaces that operate with overnight shifts — after 7pm and before 7am

Daytime & Evening

Dims from cool to warm

Spaces where people sleep — after 7pm and before 7am

Circadian and Human Centric Light

CODE	DESCRIPTION	BIO-DIMMING MODULE TECHNOLOGY GUIDE					
		Driver	Driver Voltage	CCT	Requires BIO-Dimming Module	Lighting Control	BIOS SkyBlue (490nm)
SBIOS	BIOS Static	DIM1	0-10V Dimming to 1% Dim-to-Dark	No CCT Change	No	Intensity Dimming Control Only	Always Present
DBIOS	BIOS Dynamic	BIODIM1	0-10V Intensity Dimming to 1% Dim-to-Dark	500K Shift	Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming
DBIOS-2	BIOS Dynamic (Two Channel)				No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"
TBIOS	BIOS Tunable	ATW / DTW	0-10V Control of Intensity & CCT on Separate 2 Channels / DALI Control of Intensity & CCT on Separate 2 Channels	Dims to 2700K	Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming
TBIOS-2	BIOS Tunable (Two Channel)				No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"
DWBIOS	BIOS Dim-to-Warm	-	-	Dims to 2200K	Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming
DWBIOS-2	BIOS Dim-to-Warm (Two Channel)				No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"

Length

Length Options 2', 4', 6', 8', 10' nominal, or custom within 3"

Finish

Housing Colors (Matte Finish)



White (RAL9003)



Black (RAL9005)



Gray (RAL7001)



Clear Anodized Effect



Custom RAL

Housing Material 6063-T5 extruded, recycled aluminum

Mounting Brackets Sheet metal

End Cap

End Cap Option Chamfered

End Cap Material Machined or cast aluminum

Optic

Lens Option Flush

Lens Material Patented SmartOptics® made from Acrylic (PMMA)

Voltage

Fixture Voltage (AC) 120–277 VAC and 347 VAC, 50/60 Hz

FIXTURE POWER & CONTROLS

Voltage

LED Driver Factory Selected, 36–39V Constant Current

Emergency Backup

Backup Types Emergency Circuit, Emergency Battery (Remote), and other emergency backups are available

Wiring Typically the Emergency Backup is wired to 48" sections

Power 10 W

Illumination Time 90 minutes

Partners



Control Systems

Remote Drivers (Sold Separately)


Other Factory Non-Dimming, Factory 0-10V 1% Dim, Factory 0-10V 10% Dim, Factory DALI 0.1% Dim, Factory DMX Dim, Factory TRIAC Dim, eldoLED 0-10V 0.1% Dim, eldoLED 0-10V 1% Dim, eldoLED DALI 0.1% Dim, and other drivers are available, consult factory (not all integral)

Lutron Hi-Lume 1% Dimming and 5-Series 5% Dimming

Cooper Compatible driver

Casambi (wireless) Compatible driver

STANDARDS & CERTIFICATIONS

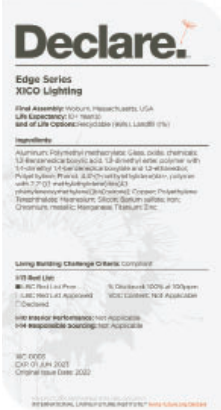

Declare Listed

Declare labels provide a quick and reliable way to make choices about the environmental footprint and safety of the product. Declare is internationally recognized and the labels can be found on the product, product packaging, or company website. Visit xicoled.com for Declare Listed details.



Red List Free

An industry standard certification for LED lighting products based on the International Living Future Institute (ILFI). These products only use materials based on the "Red List of Toxic Chemicals" (a list of chemicals and materials known to be hazardous to people and/or the Earth) that are safe, healthy, and environmentally sustainable.

Certifications

Compliance

BAA & TAA compliant in-house manufacturing in Boston, MA with North American supply chain

Certifications



Sustainability

Declare Listed and Red List Free

Packaging

Low carbon, environmentally conscious packaging and shipping methods

Environmental Suitability

IP Rating

Suitable for Dry and Damp Locations, indoor use only

Recyclable

SmartOptics and all powder coated and anodized parts are fully recyclable at end of life

Reliability

Manufacturing

All XICO products and associated optics and LED engines are assembled at our factory in Woburn, MA

Quality Assurance

Each product is engineered reliability and quality assurance tested

Warranty & Terms

5-YR Warranty

Business Terms



For details on our warranty and business terms, please click or scan the QR Code.