

EDGESolo275 Wall

2.75" Edge-Lit Linear LED Wall Mount



Features & Benefits

Exceptional Performance

Up to 1,000 lm/ft, 135 lm/W efficacy

Wide Range of LED Selections

Static and Tunable White

Designed with Options

Wide choice of SmartOptic® lenses, beam distributions, 80/90/95+ CRI, 2200K to 5000K CCT, and 0-10V, DALI, DMX, and TRIAC dimming

Patented Innovations

Fusion® Optix Inside with unique SmartBeam® capabilities

Proprietary Optical Components

Provides excellent light distribution and high-transmission

Committed to Sustainability

Declare Listed and Red Free List materials

Compliance

UL Listed, Dry and Damp Locations

5-Year Warranty

Standard 5-year warranty, 50,000 hours

Designed & Built in
BOSTON

Declare



FIXTURE ORDERING

Project Name

Fixture Type

1) FIXTURE DESIGN

PRODUCT	LENGTH		FINISH		END CAP		OPTIC (DIRECT ONLY)	
ESO275-W								
2.75" Edge-Lit Linear LED Wall Mount	2	2'	MWH	Matte White (RAL9003)	E2	Chamfered End Cap	OFL	Flush Lens
	4	4'	MBK	Matte Black (RAL9005)				
	6	6'	MGR	Matte Gray (RAL7001)				
	8	8'	CAE	Clear Anodized Effect				
	10	10'	RAL_	Specify RAL#				
	X_	Specify X', Y"						

2) LED LIGHT ENGINE

CRI		CCT		DIRECT BEAM PATTERN		DIRECT OUTPUT		INDIRECT BEAM PATTERN		INDIRECT OUTPUT	
S80	Std. 80 CRI	22	2200K	DLAM	Lambertian	35	350 lm/ft	NN	Not Needed	NN	Not Needed
S90	Std. 90 CRI	27	2700K	DBW65	Batwing 65°	50	500 lm/ft	ILAM	Lambertian	35	350 lm/ft
HE80	High-Eff. 80 CRI	30	3000K	DA5025	Asymmetric 50°	75	750 lm/ft	IBW120	Batwing 120°	50	500 lm/ft
HE90	High-Eff. 90 CRI	35	3500K		at 25° Tilt	100	1,000 lm/ft	IFT150	FlatTop 150°	75	750 lm/ft
HD95	High-Def. 95 CRI	40	4000K	X_	Specify Beam	X_	Specify lm/ft	IA6040	Asymmetric 60° at 40° Tilt	100	1,000 lm/ft
SUN	Full SunLike	50	5000K					IA4560	Asymmetric 45° at 60° Tilt	X_	Specify lm/ft
		X_	Specify CCT					X_	Specify Beam		

3) FIXTURE POWER & CONTROLS

LINE VOLTAGE (DC)		REMOTE DRIVER (POWER)		REMOTE DRIVER BOX ¹		EMERGENCY BACKUP		CONTROL SYSTEM ³	
UNV	120/277V	FDND	Factory Non-Dimming	NN	Not Needed	NN	Not Needed	NN	Not Needed
347	347V	FD01	Factory 0-10V 1% Dim	RLDB ²	Remote Linear Driver Box (driver included by default)	EMC	Emergency Circuit	LUT	Lutron
		FD10	Factory 0-10V 10% Dim			EMB	Emergency Battery (10 W — Remote)	COO	Cooper
		FDDA	Factory DALI 0.1% Dim	RX2D ²	Optional Remote XBox2 Driver, Up to 2 Drivers	X_	Specify Backup	CAS	Casambi
		FDDX	Factory DMX Dim					X_	Specify Control System
		FDTR	Factory TRIAC Dim	RX3D ²	Optional Remote XBox3 Driver, Up to 3 Drivers				
		LD01	Lutron Hi-Lume 1% Dim						
		LD05	Lutron 5-Series 5% Dim	RX5D ²	Optional Remote XBox5 Driver, Up to 5 Drivers				
		ED00	eldoLED 0-10V 0.1% Dim						
		ED01	eldoLED 0-10V 1% Dim						
		EDDA	eldoLED DALI 0.1% Dim						
		X_	Specify Driver						

4) FIXTURE MOUNTING & CONNECTIONS

MOUNTING TYPE	MOUNTING KIT

WM Wall Mount SWMB Stainless Steel Wall Mounting Bracket

Footnotes: ¹ Remote distance is dependent on driver type, up to 100' (30.5 m). ² Creates a clean and organized power solution for multiple fixture installations.
³ The control system and driver must be compatible.


NOTES

Project Name

Fixture Type


REMOTE DRIVER BOX

Dimensions

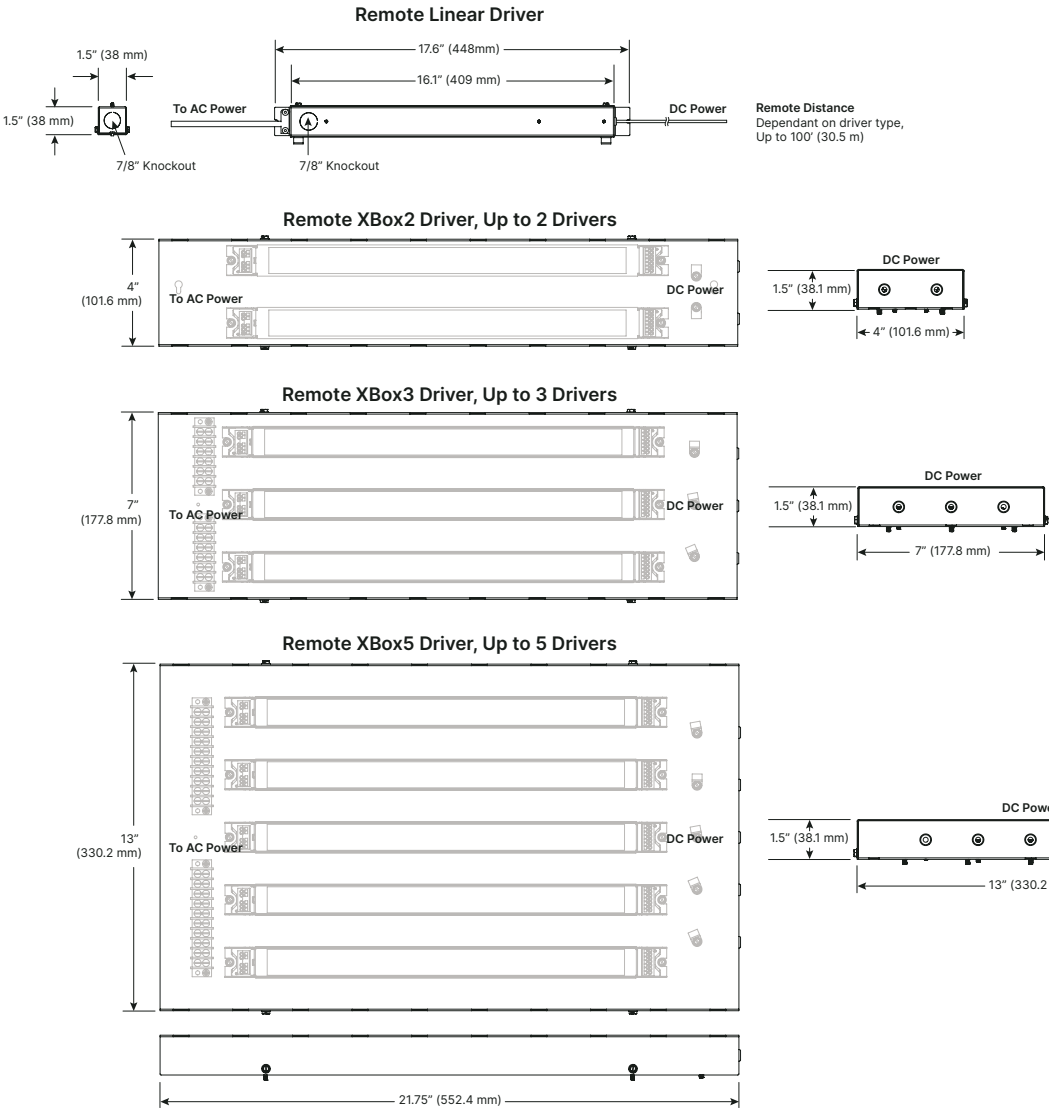

FIXTURE DESIGN

Dimensions

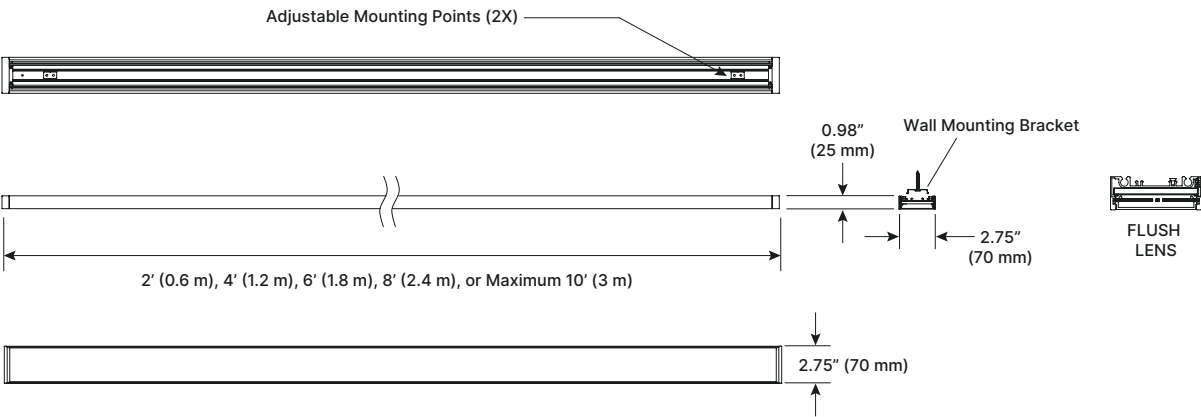


To download BIM (Revit) Files, please click or scan the QR Code.

Length


Length Options 2', 4', 6', 8', 10' nominal, or custom within 3"

Finish


Housing Colors (Matte Finish)




White (RAL9003)




Black (RAL9005)



Gray (RAL7001)



Clear Anodized Effect



Custom RAL

Housing Material 6063-T5 extruded, recycled aluminum

Mounting Brackets Sheet metal

End Cap

End Cap Option Chamfered

End Cap Material Machined or cast aluminum

Optic


Lens Option Flush

Lens Material Patented SmartOptics® made from Acrylic (PMMA)

Voltage

Fixture Voltage (AC) 120-277 VAC and 347 VAC, 50/60 Hz

LED SELECTION GUIDE

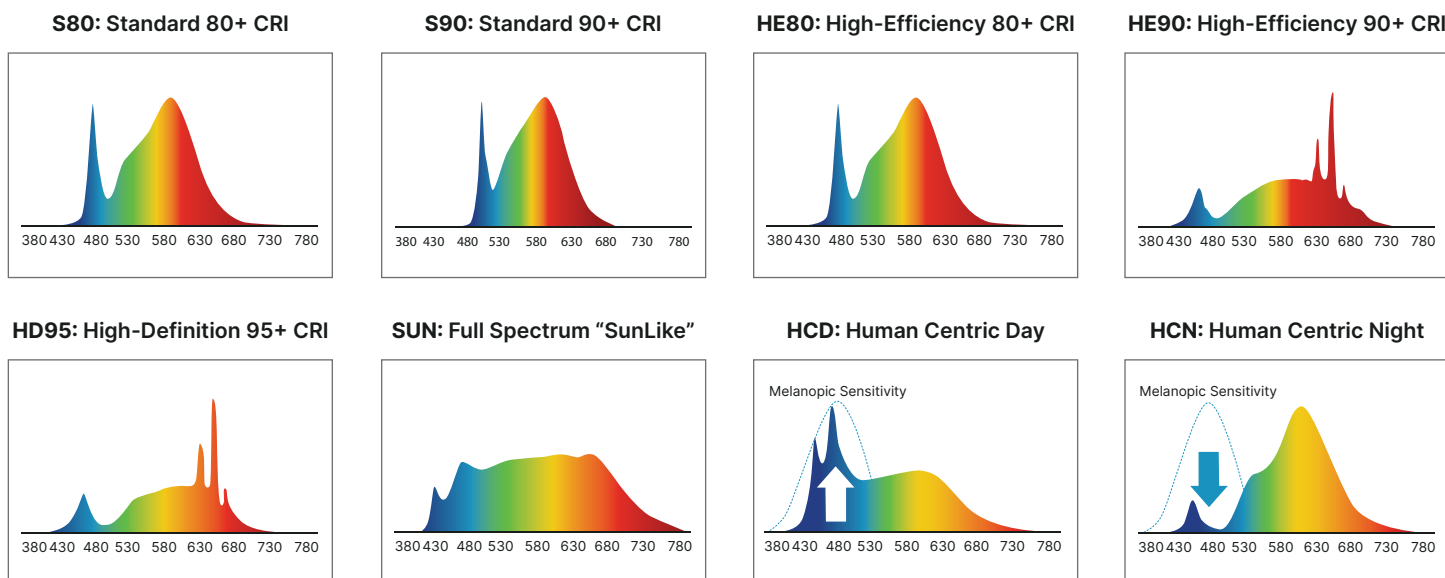

Static White Light (LED Light Engine Only)

CODE	DESCRIPTION	TYPICAL LED DATA							
		CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	M/P Ratio	LPW
S80	Standard 80 CRI	3500K	82.5	7.8	84	96.7	82.5	0.51	190
S90	Standard 90 CRI	3500K	91	54.3	89.3	98.9	89.2	0.55	175
HE80	High Efficiency 80 CRI	3500K	82.1	5.9	83	94.2	81.2	0.52	210
HE90	High Efficiency 90 CRI	3500K	92.2	90	90.7	103.8	92.1	0.56	190
HD95	High Definition 95 CRI	3500K	97.1	95	–	–	–	0.70	163
SUN	Full Spectrum SunLike®	3500K	95	85	–	–	–	–	130
HCD	Human Centric Day	4000K	83	95	–	–	–	0.92	155
HCN	Human Centric Night	2700K	80	–	–	–	–	0.44	134

LPW Efficacy Conversion Chart

CODE	CCT SELECTED							
	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
S80	–	0.91	0.96	1.00	1.04	1.11	1.11	1.11
S90	–	0.91	0.96	1.00	1.04	1.11	1.11	1.11
HE80	–	0.96	0.99	1.00	1.03	1.04	1.03	1.03
HE90	–	0.91	0.96	1.00	1.04	1.11	N/A	N/A
HD95	–	0.91	0.96	1.00	1.04	1.11	1.03	1.04
SUN95	–	0.90	0.92	1.00	1.01	1.07	1.04	1.05
HCD	–	N/A	0.96	1.00	1.04	1.04	1.04	1.04
HCN	–	0.87	0.96	1.00	1.04	N/A	N/A	N/A

BIOS TECHNOLOGY

Choosing Your BIOS Solution


BIOS is offered in four Circadian LED Solutions with BIOS SkyBlue Technology — Biological Static, Biological Dynamic, Biological Tunable, and Biological Dim-to-Warm. BIOS SkyBlue™ Technology includes a blue peak at 490nm that provides an effective daytime circadian signal using standard architectural color temperatures.

bios


To learn more about BIOS Technology, please click or scan the QR Code.




BIOS Static




BIOS Dynamic



BIOS Tunable



BIOS Dim-to-Warm



Daytime

No color change when dimmed

Spaces that operate during daytime hours — 7am and 7pm

Daytime & Evening

500K shift when dimmed

Spaces that operate overnight — after 7pm and before 7am

Daytime & Evening

Dims to 2700K

Spaces that operate with overnight shifts — after 7pm and before 7am

Daytime & Evening

Dims from cool to warm

Spaces where people sleep — after 7pm and before 7am

Circadian and Human Centric Light


CODE	DESCRIPTION	BIO-DIMMING MODULE TECHNOLOGY GUIDE					
		Driver	Driver Voltage	CCT	Requires BIO-Dimming Module	Lighting Control	BIOS SkyBlue (490nm)
SBIOS	BIOS Static	DIM1	0-10V Dimming to 1% Dim-to-Dark	No CCT Change	No	Intensity Dimming Control Only	Always Present
DBIOS	BIOS Dynamic	BIODIM1	0-10V Intensity Dimming to 1% Dim-to-Dark	500K Shift	Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming
DBIOS-2	BIOS Dynamic (Two Channel)				No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"
TBIOS	BIOS Tunable	ATW / DTW	0-10V Control of Intensity & CCT on Separate 2 Channels / DALI Control of Intensity & CCT on Separate 2 Channels	Dims to 2700K	Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming
TBIOS-2	BIOS Tunable (Two Channel)				No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"
DWBIOS	BIOS Dim-to-Warm	-	-	Dims to 2200K	Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming
DWBIOS-2	BIOS Dim-to-Warm (Two Channel)				No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"

SMARTBEAM® TECHNOLOGY

The Ultimate Control of Lighting Distributions

SmartBeam makes it easy to specify the exact light required for any architectural space. Available in every XICO product; it is now possible to create truly tailored and engaging lighting that transform spaces, improves visual comfort, and saves energy.

To learn more about our SmartBeam Technology, please click or scan the QR Code.



FIXTURE POWER & CONTROLS

Voltage

LED Driver Factory Selected, 36–39V Constant Current

Emergency Backup

Backup Types Emergency Circuit, Emergency Battery (Remote), and other emergency backups are available

Wiring Typically the Emergency Backup is wired to 48” sections

Power 10 W

Illumination Time 90 minutes

Partners



Control Systems

Remote Drivers (Sold Separately)

Other Factory Non-Dimming, Factory 0–10V 1% Dim, Factory 0–10V 10% Dim, Factory DALI 0.1% Dim, Factory DMX Dim, Factory TRIAC Dim, eldoLED 0–10V 0.1% Dim, eldoLED 0–10V 1% Dim, eldoLED DALI 0.1% Dim, and other drivers are available, consult factory (not all integral)

Lutron Hi-Lume 1% Dimming and 5-Series 5% Dimming

Cooper Compatible driver

Casambi (wireless) Compatible driver

XBox

Remote Driver Boxes (Optional) To create a clean and organized power solution for multiple fixture installations see our XBox Specification Guide. Reach out to a XICO Sales Representative to discuss you projects needs.



Flush Lens

FIXTURE MOUNTING & CONNECTIONS

Mounting Type

Wall Mount

Installs onto a wall. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements.

Mounting Kit

Wall Mounting Bracket

Stainless Steel


Power Feed

Power Whip

12"




Mounting Options

WM - Wall Mount

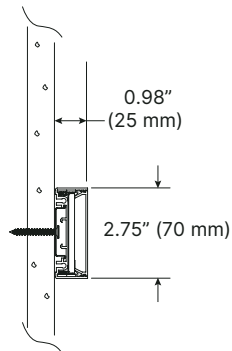

Standard Lengths & Continuous Runs

Maximum length of one fixture is 10'. Longer runs can be produced by joining sections. Customer approval of shop drawings is required prior to build of any non-standard length order.

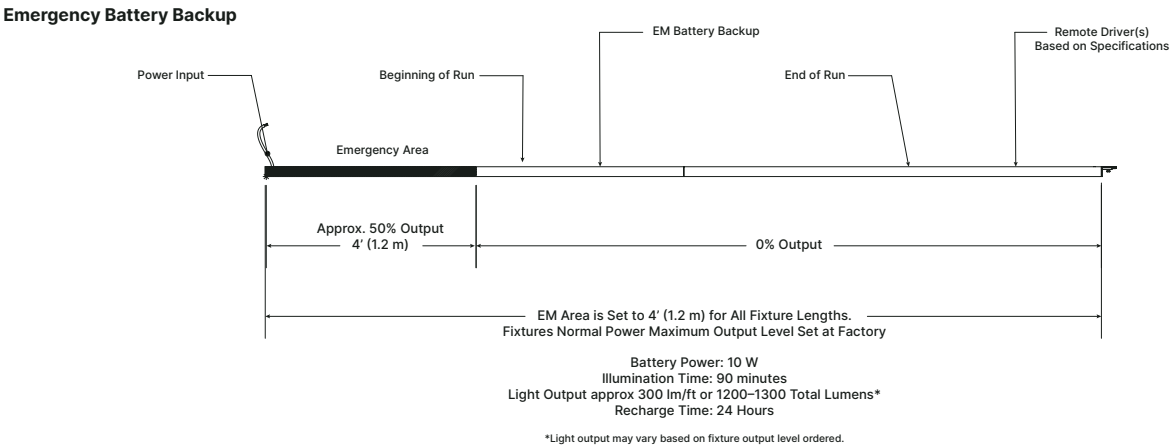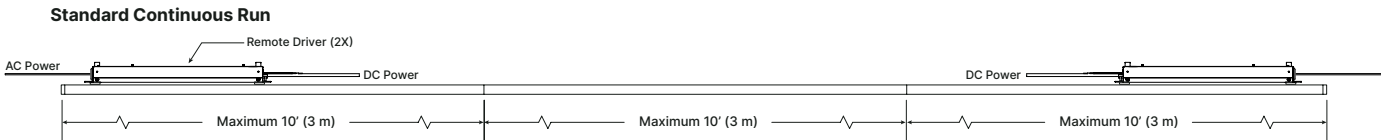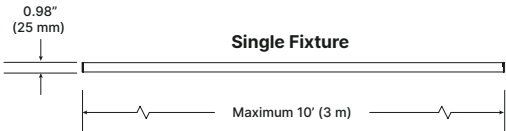


OPTIC	BEAM PATTERN		
	DLAM	DBW65	DA5025
Flush Lens	●	●	●

DIRECT PHOTOMETRICS


Static White Light

DLAM: Lambertian




Length 48"
LED HE80
CRI/CCT 80+/3500K
Lumens 3,000
lm/ft 746
Watts 27
W/ft 6.8
LPW 110

DBW65: Batwing 65°



Length 48"
LED HE80
CRI/CCT 80+/3500K
Lumens 3,000
lm/ft 743
Watts 27
W/ft 6.8
LPW 109

DA5025: Asymmetric 50° at 25° Tilt




Length 48"
LED HE80
CRI/CCT 80+/3500K
Lumens 3,000
lm/ft 738
Watts 10.5
W/ft 5.3
LPW 141

INDIRECT PHOTOMETRICS


Static White Light

ILAM: Lambertian




Length 48"
LED HE80
CRI/CCT 80+/3500K
Lumens 4,000
lm/ft 1,000
Watts 28
W/ft 7
LPW 150

IBW120: Batwing 120°




Length 48"
LED HE80
CRI/CCT 80+/3500K
Lumens 4,000
lm/ft 1,017
Watts 25
W/ft 6.3
LPW 162

IFT150: FlatTop 150°




Length 48"
LED HE80
CRI/CCT 80+/3500K
Lumens 4,000
lm/ft 1,004
Watts 26
W/ft 6.5
LPW 155

IA6040: Asymmetric 60° at 40° Tilt




Length 48"
LED HE80
CRI/CCT 80+/3500K
Lumens 4,000
lm/ft 991
Watts 28
W/ft 7
LPW 143

IA4560: Asymmetric 45° at 60° Tilt



Length 48"
LED HE80
CRI/CCT 80+/3500K
Lumens 4,000
lm/ft 991
Watts 28
W/ft 7
LPW 143

PATENTS & TRADEMARKS



To learn more about our unique technologies, please click or scan the QR Code.

Utility Patents

United States	US11543582, US11520097, US11512466, US11441749, US11396751, US11333822, US11163104, US11156762, US10852466, US10068447, US8953926, US8948564, US8911099, US8876348, US8794812, US8783898, US8761565, US8750671, US8721152, US8619363, US8430548, US8408775, US8249408, US8231256, US8177408, US8033706, US8033674, US7991257, US7914192, US7784954, US7758227, US7722224, US7542635, US7453636, US7453635, US7431489, US7408707, US7278775, US6369944, US6346311, US6123877, US5932342, US5837346, US20220373144, US20220372752, US20220364708, US20220357006, US20220357005, US20220342141, US20220290432, US20220206210A1, US20220171119A1, US20220171115A1, US20220162856A1, US20220162853A1, US20220146063A1, US20220137287, US20210301991A1, US20200355345A1, US20200217071A1, US20220333765A1, US20220228366A1, US20220196906A1, US20220010554A1, US20080043490A1, US20060290253A1, US20060215958A1, US20120321247, US20120250330, US20120099204
Canada	CA2702600, CA2702685, CA2702690
France	FREP0800658
Germany	DEEP0800658
Great Britain	GB2492541, GB2492542, GBEP0800658, GB2492398
Japan	JP03958359
Netherlands	NLEP0800658
Taiwan	FTW360813B
European Patent Organization	EP0843203, EP0843203

Design Patents

United States	USD719282, USD717973, USD669606, USD669608, USD669609, USD669614, USD663056
----------------------	---

The Patent Corporation Treaty

World Intellectual Property Organization	WO2015200268
---	--------------

Trademarks

United States	US6672871, US6397231, US6373493, US6257728, US6190558, US6190559, US6142905, US6114408, US6038234, US6025279, US6060740, US6257729, US5856164, US5734112, US5543304, US5309290, US5309315, US4691124, US4640751
----------------------	---