


GRIDSlot1.5

Direct | Standard Lengths



Project Name _____

Fixture Type _____

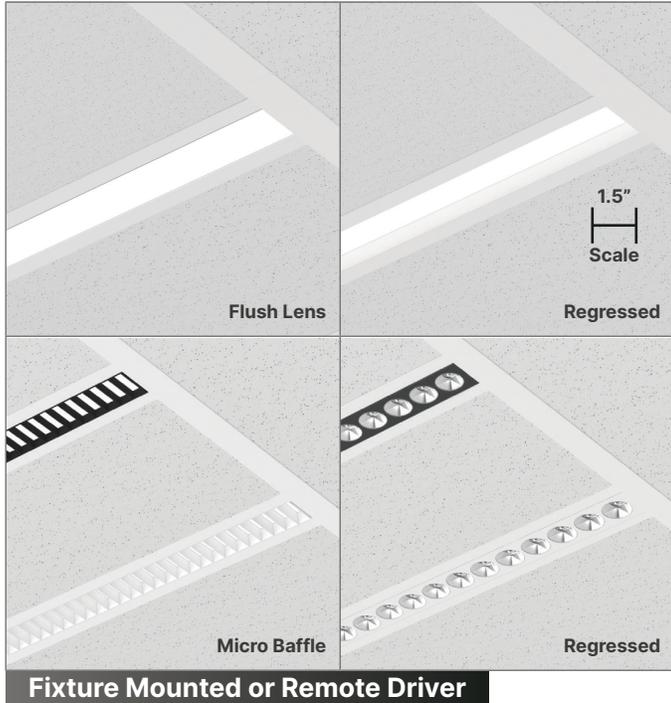

DESCRIPTION

1.5" Compact Linear LED T-Bar Mount

GRIDSlot1.5 takes the same capabilities and SmartBeam® controlled distributions and adapts to recessed applications. GRIDSlot1.5 has T-Bar and custom configuration mounting options for ceiling systems. The GRIDSlot1.5 range is designed to be specification-grade with high lumen per foot, high CRI, and circadian options.

FEATURES & BENEFITS

Exceptional Performance

Up to 1,000 lm/ft, 150 lm/W efficacy

Wide Range of LED Selections

Static, Tunable White, and Dim-to-Warm

Designed with Options

Wide choice of SmartOptic® lenses, beam distributions, 80/90/95+ CRI, 2700K to 6500K CCT, and 0-10V, DALI, DMX, and TRIAC dimming

Patented Innovations

Fusion® Optix Inside with unique SmartBeam® capabilities

Proprietary Optical Components

Provides excellent light distribution and high-transmission

Committed to Sustainability

Declare Listed and Red Free List materials


Compliance

UL Listed, Dry and Damp Locations

5-Year Warranty

Standard 5-year warranty, 50,000 hours

LIGHTING CONFIGURATIONS

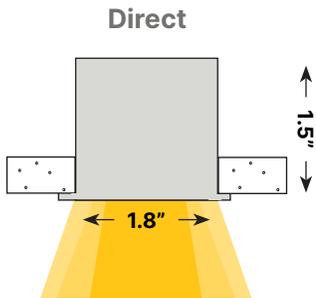

Designed & Built in **BOSTON**

FIXTURE ORDERING

Project Name _____

Fixture Type _____

1) FIXTURE DESIGN

PRODUCT	FIXTURE LENGTH	FINISH
GSL1.5-R 1.5" Edge-Lit Linear LED T-Bar Mount	2 - 2 ft 4 - 4 ft 6 - 6 ft 8 - 8 ft X_ - Specify Ft', In"	Powder Coated PMW - Matte White PMB - Matte Black PMG - Matte Gray PRAL_ - Specify RAL # Anodized ACL - Clear Anodized ACU_ - Custom Anodized #
	Custom fixtures are available in 3" increments beyond standard lengths.	

2) LED LIGHT ENGINE

CRI	CCT	OPTIC (DIRECT ONLY)	DIRECT BEAM PATTERN	DIRECT OUTPUT
80 - Std. 80 CRI 90 - Std. 90 CRI 95 - High-Def. 95 CRI SUN - Full SunLike	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K XD - Dim-to-Warm ¹ XT - Tunable ¹ X_ - Specify CCT Specify Dim-to-Warm and Tunable between 2700K-6500K.	OFL - Flush Lens ORL - Regressed Lens OMBW - Micro Baffle, White (Requires Regressed Lens) OMBB - Micro Baffle, Black (Requires Regressed Lens) ORNCOW - Round NCO, White ORNCOB - Round NCO, Black ORNCOG - Round NCO, Graphite	DLAM - Lambertian DBW60 - Batwing 60° DDA70 - Double Asym 70° DA4015 - Asym 40° at 15° Tilt DA3010 - Asym 30° at 10° Tilt DM70 - Medium 70° DN40 - Narrow 40° X_ - Specify Beam ¹ DS45 - Nano Cavity Optics Spot 45° DS35 - Nano Cavity Optics Spot 35° DS25 - Nano Cavity Optics Spot 25°	35 - 350 lm/ft 50 - 500 lm/ft 75 - 750 lm/ft 100 - 1,000 lm/ft X_ - Specify lm/ft

3) FIXTURE POWER & CONTROLS

LINE VOLTAGE (DC)	DRIVER LOCATION	DRIVER (POWER) ²
UNV - 120/277V 347 - 347V	FMD - Fixture Mounted Driver RD - Remote Driver	FDND - Factory Non-Dimming FD00 - Factory 0-10V 0.1% Dim FD01 - Factory 0-10V 1% Dim FD10 - Factory 0-10V 10% Dim FDDA - Factory DALI 0.1% Dim FDDX - Factory DMX Dim FDTR - Factory TRIAC Dim LD01 - Lutron Hi-Lume 1% Dim X_ - Specify Driver

Footnotes: ¹ Contact factory about custom beam options. ² Standard driver box is included

4) FIXTURE MOUNTING

T-Bar FLANGE TYPE
TC1 - 9/16" Flat T-Bar Type TC2 - 9/16" Bolt & Slot Type TC3 - 15/16" Flat T-Bar Type X_ - Specify Mounting Type

P24W - 24" White Cable Kit
P24B - 24" Black Cable Kit


FIXTURE ORDERING

Project Name _____ Fixture Type _____


OPTIONAL	
EMERGENCY BACKUP	WIRELESS MODULE
<p>EMC - Emergency Circuit EMB - Emergency Battery (10 W — Remote) X_ - Specify Backup</p> <p>Specify requirements at time of order.</p>	<p>WCN - Wireless Communication Node (Connected to LED Driver In-Fixture or In-Driver Box) PIR - Wireless Communication Node + PIR Sensor (Standard Lens for Low Bay < 10') MW - Wireless Communication Node + MW Sensor (Standard for Low Bay < 10') X_ - Other – Specify Embedded Component or Specific Non-Standard Sensor Detection Range</p>

DIMENSIONS & INSTALLATION

Dimensions

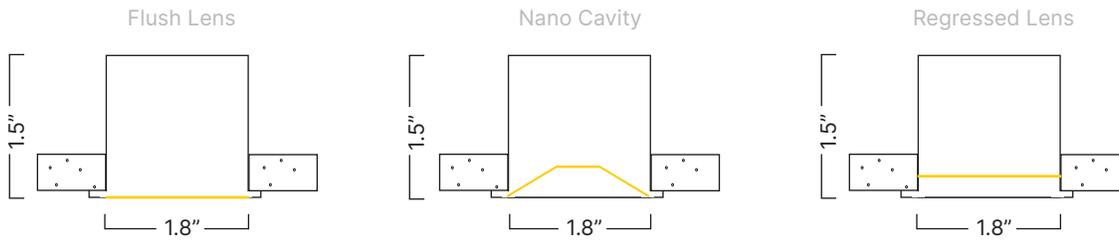

Standard Fixtures

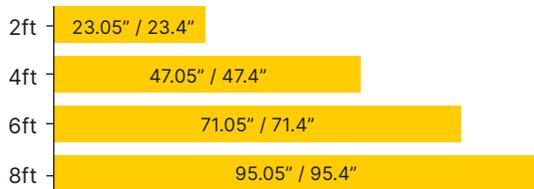

Lens Length / Fixture Length

Mounting Type



T-Bar Mount

Specifically designed to fit standard T-Bar/Grid Spacing for seamless fit. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements.


Mounting Option

TC1 - 9/16" Flat T-Bar Mount

TC2 - 9/16" Bolt Slot T-Bar Mount



TC3 - 15/16" Flat T-Bar Mount



SMARTBEAM® TECHNOLOGY


The Ultimate Control of Lighting Distributions

SmartBeam makes it easy to specify the exact light required for any architectural space. Available in every XICO product; it is now possible to create truly tailored and engaging lighting that transform spaces, improves visual comfort, and saves energy.


To learn more about our SmartBeam Technology, please click or scan the QR Code.




Direct Optics Choices

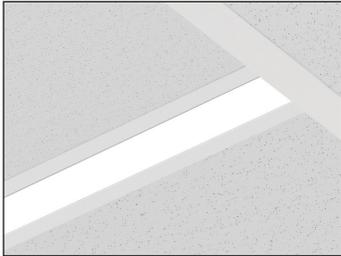


FL - Flush Lens

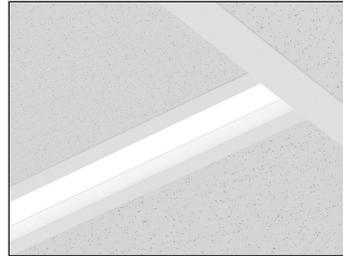

Regressed Lens

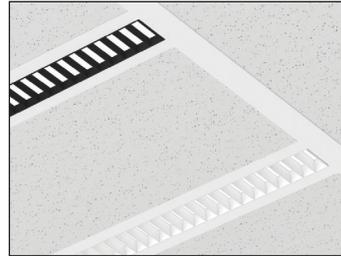

MB - Micro Baffle

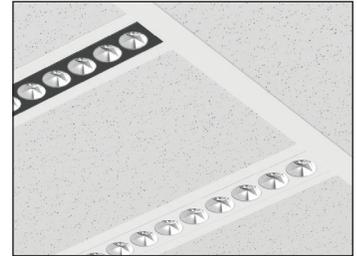

MCO - Micro Cavity Optics

DIRECT OPTICS	BEAM PATTERN									
	DLAM	DBW60	DDA70	DA4015	DA3010	DM70	DN40	DS45	DS35	DS25
Flush Lens	■	■	■	■	■	■	■			
Regressed Lens	■	■	■	■	■	■	■			
Micro Baffle	■	■	■	■	■	■	■			
MCO								■	■	■

LPW Efficacy Conversion Chart

CODE	CCT SELECTED							
	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
80	-	0.91	0.96	1.00	1.04	1.11	1.11	1.11
90	-	0.91	0.96	1.00	1.04	1.11	1.11	1.11
95	-	0.91	0.96	1.00	1.04	1.11	1.03	1.04
SUN	-	0.90	0.92	1.00	1.01	1.07	1.04	1.05

LPW Performance

	DIRECT									
	DLAM	DBW60	DDA70	DA3015	DA3010	DM70	DN40	DS45	DS35	DS25
LM/W	83	141	123	131	130	149	151	82	82	82


$$LM/W = \frac{\left(\begin{matrix} \text{DIRECT} \\ \text{LM/FT} \end{matrix} + \begin{matrix} \text{INDIRECT} \\ \text{LM/FT} \end{matrix} \right)}{\left(\begin{matrix} \text{DIRECT} \\ \text{W/FT} \end{matrix} + \begin{matrix} \text{INDIRECT} \\ \text{W/FT} \end{matrix} \right)}$$

DIRECT PHOTOMETRICS

48" Length, 80+/3500K CRI/CCT, 3,000 Lumens


Static White Light

DLAM: Lambertian




LM/FT	W/FT	LM/W
350	4.2	83.3
500	6	83.3
750	9	83
1000	12	83.3

DBW60: Batwing 60°




LM/FT	W/FT	LM/W
350	2.5	140
500	3.5	142.9
750	5.3	141
1000	7.1	140.1

DDA70: Double Asymmetric 70°




LM/FT	W/FT	LM/W
350	2.8	125
500	4.1	122
750	6.1	123
1000	8.1	123.5

DA3015: Asymmetric 30° at 15° Tilt

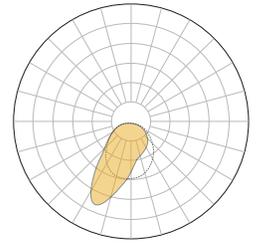


LM/FT	W/FT	LM/W
350	2.7	129.6
500	3.8	131.6
750	5.7	131
1000	7.6	131.6

DA3010: Asymmetric 30° at 10° Tilt




LM/FT	W/FT	LM/W
350	2.8	125
500	3.9	128.2
750	5.8	130
1000	7.7	129.9

DM70: Medium 70°




LM/FT	W/FT	LM/W
350	2.3	152
500	3.3	151.5
750	5	149
1000	6.7	149.3

DN40: Narrow 40°




LM/FT	W/FT	LM/W
350	2.3	152
500	3.3	151.5
750	5	151
1000	6.7	149.3

DS45: Micro Cavity Optic Spot 45°

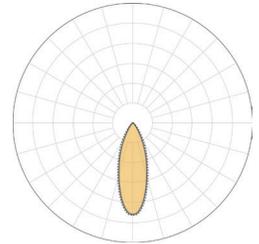


LM/FT	W/FT	LM/W
350	4.2	83.3
500	6.1	82
750	9.1	82
1000	12.1	82.6

DS35: Micro Cavity Optic Spot 35°



LM/FT	W/FT	LM/W
350	4.2	83.3
500	6.1	82
750	9.1	82
1000	12.1	82.6

DS25: Micro Cavity Optic Spot 25°



LM/FT	W/FT	LM/W
350	4.2	83.3
500	6.1	82
750	9.1	82
1000	12.1	82.6


COMPATIBLE OPTIC			
FLUSH LENS	REGRESSED LENS	MICRO BAFFLE	MCO

OPTICS CONFIGURATIONS


			
Flush Lens	Regressed Lens	Micro Baffle	Round MCO
White Flush Lens OFL	White Regressed Lens ORL	White Micro Baffle OMBW	White Round MCO ORMCOW
		Black Micro Baffle OMBB	Black Round MCO ORNCOB
			Graphite Round MCO ORMCOG

LED OPTIONS


80: Standard 80+ CRI

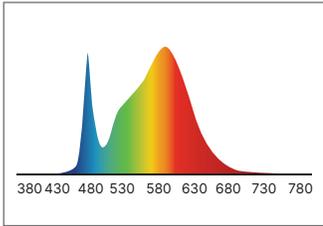


90: Standard 90+ CRI

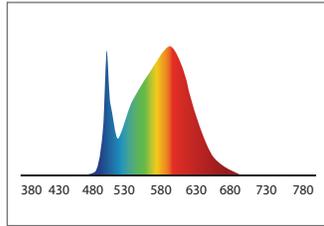

95: High-Definition 95+ CRI

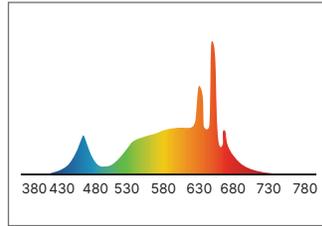

SUN: Full Spectrum "SunLike"

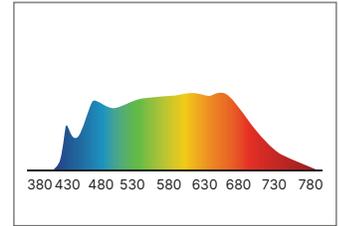

Static White Light (LED Light Engine Only)

CODE	DESCRIPTION	TYPICAL LED DATA							
		CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	M/P Ratio	LPW
80	Standard 80 CRI	3500K	82.5	7.8	84	96.7	82.5	0.51	190
90	Standard 90 CRI	3500K	91	54.3	89.3	98.9	89.2	0.55	175
95	High Definition 95 CRI	3500K	97.1	95	-	-	-	0.70	163
SUN	Full Spectrum SunLike®	3500K	95	85	-	-	-	-	130

POWER & CONTROLS

Voltage

Fixture Voltage (AC)

120–277 VAC
347 VAC, 50/60 Hz

Power Location

Fixture Mounted or Remote

LED Driver

Factory Selected, 36–39V Constant Current

Drivers

FDND - Factory Non-Dimming
FD00 - Factory 0-10V 0.1% Dim
FD01 - Factory 0-10V 1% Dim
FD10 - Factory 0-10V 10% Dim
FDDA - Factory DALI 0.1% Dim
FDDX - Factory DMX Dim
FDTR - Factory TRIAC Dim
LD01 - Lutron Hi-Lume 1% Dim
X_ - Specify Driver

Emergency Backup (Optional)

EMC - Emergency Circuit
EMB - Emergency Battery
 (10 W — Remote)
X_ - Specify Backup

Power

10 W

Illumination Time

90 minutes

IP Rating

Suitable for Dry and Damp Locations,
indoor use only

XBox

Remote Driver Boxes (Optional)

To create a clean and organized power solution for multiple fixture installations see our Xbox Specification Guide. Reach out to a XICO Sales Representative to discuss your projects needs.

Compatible Control Options



