


# EDGESolo325 Woodworks®

# XICO®


Direct | Standard Lengths

Project Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

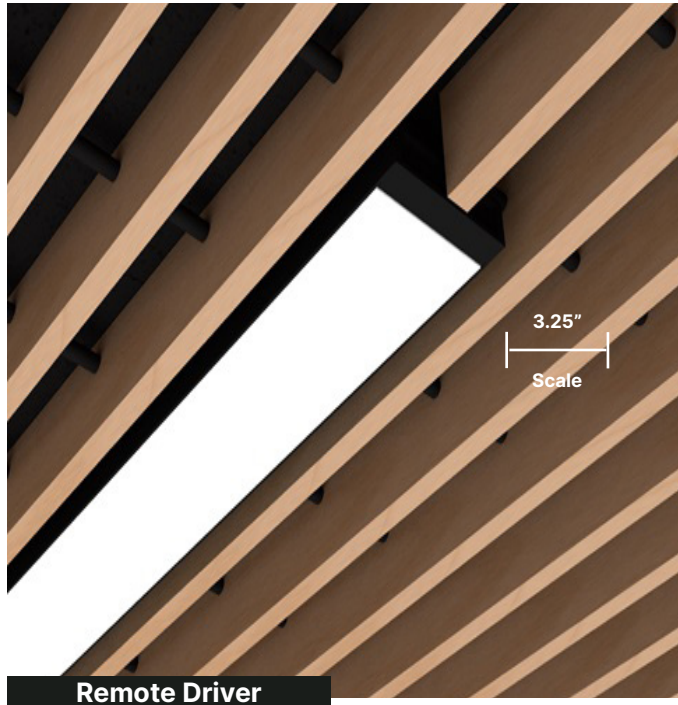

## LIGHTING CONFIGURATIONS

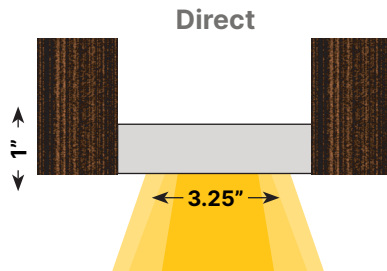

## DESCRIPTION

### 3.25" x 1.0" Edge-Lit Linear for Wood Ceiling Grids

EDGESolo325 Woodworks is an innovative low-profile LED luminaire designed to fit within a 3.25" space between grills in an Armstrong Woodworks Ceiling panel. EDGESolo325 Woodworks is only 1" high and provides the perfect direct light with a range of symmetric and asymmetric lighting distributions available. EDGE products all provide best-in-class efficiency and beam control options. EDGESolo325 Woodworks is specification-grade with high lumen per foot, high CRI, and circadian options. EDGESolo275 Woodworks incorporates an engineered LED light engine with fully customizable choices for lumen output, CCT, and CRI.

## FEATURES & BENEFITS

### Exceptional Performance

Up to 1,000 lm/ft, 135 lm/W efficacy. Low Glare (UGR<19) WELL Building Standard™ and LEED certified when specified less than 500 lm/ft.

### LED Selections

Static

### Designed with Options

Wide choice of SmartOptic® lenses, beam distributions, 80/90/95+ CRI, 2700K to 6500K CCT, and 0-10V, DALI, DMX, and TRIAC dimming

### Patented Innovations

Fusion® Optix Inside with unique SmartBeam® capabilities

### Proprietary Optical Components

Provides excellent light distribution and high-transmission

### Committed to Sustainability

Declare Listed and Red Free List materials

### Compliance

UL Listed, Dry and Damp Locations

### 5-Year Warranty

Standard 5-year warranty, 50,000 hours

Declare



bios



Designed & Built in  
**BOSTON**

## FIXTURE ORDERING

Project Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

### 1) FIXTURE DESIGN

PRODUCT	FIXTURE LENGTH	FINISH	END CAP STYLE
<b>ESO325-WW</b> 3.25" Aperature Linear Downlight for Wood Ceiling Grids	<b>2</b> - 2 ft <b>4</b> - 4 ft <b>6</b> - 6 ft <b>8</b> - 8 ft <b>X_</b> - Specify Ft', In"  Custom fixtures are available in 3" increments beyond standard lengths.	<b>Powder Coated</b> <b>PMW</b> - Matte White <b>PMB</b> - Matte Black <b>PMG</b> - Matte Gray <b>PRAL_</b> - Specify RAL #  <b>Anodized</b> <b>ACL</b> - Clear Anodized <b>ACU_</b> - Custom Anodized #	<b>E1</b> - Flat End Cap <b>E2</b> - Chamfered End Cap

### 2) LED LIGHT ENGINE

CRI	CCT	OPTIC (DIRECT ONLY)	DIRECT BEAM PATTERN	DIRECT OUTPUT
<b>80</b> - Std. 80 CRI <b>90</b> - Std. 90 CRI <b>95</b> - High-Def. 95 CRI <b>SUN</b> - Full SunLike	<b>27</b> - 2700K <b>30</b> - 3000K <b>35</b> - 3500K <b>40</b> - 4000K <b>X_</b> - Specify CCT	<b>OSL</b> - Standard Lens  <b>GRL</b> - Glare Reduction Lens (LEED certified and meets the WELL Building Standard™ with output less than 400 lm/ft)	<b>DLAM</b> - Lambertian <b>DBW65</b> - Batwing 65° <b>DA5025</b> - Asym 50° at 25° Tilt <b>X_</b> - Specify Beam¹	<b>35</b> - 350 lm/ft <b>50</b> - 500 lm/ft <b>75</b> - 750 lm/ft <b>100</b> - 1,000 lm/ft <b>X_</b> - Specify lm/ft
			<b>DLAM</b> - Lambertian	

### 3) FIXTURE POWER & CONTROLS

LINE VOLTAGE (DC)	REMOTE DRIVER (POWER)²	
<b>UNV</b> - 120/277V <b>347</b> - 347V	<b>FDND</b> - Factory Non-Dimming <b>FD00</b> - Factory 0-10V 0.1% Dim <b>FD01</b> - Factory 0-10V 1% Dim <b>FD10</b> - Factory 0-10V 10% Dim <b>FDDA</b> - Factory DALI 0.1% Dim <b>FDDX</b> - Factory DMX Dim <b>FDTR</b> - Factory TRIAC Dim <b>LD01</b> - Lutron Hi-Lume 1% Dim <b>X_</b> - Specify Driver	Footnotes: ¹ Contact factory about custom beam options. ² Standard driver box is included


### 4) FIXTURE MOUNTING & CONNECTIONS

WOODWORKS TYPE	MOUNTING KIT	POWER CORD
<b>A1</b> - Grille Classic <b>A2</b> - Grille Tegular 9/16" <b>A3</b> - Grille Tegular 15/16" <b>A4</b> - Grille Forte <b>A5</b> - Linear Solid Wood Panels <b>A6</b> - Linear Veneered Panels	<b>WW225</b> - XICO Integration Clip Slat Hgt 2.25" <b>WW325</b> - XICO Integration Clip Slat Hgt 3.25" <b>WW425</b> - XICO Integration Clip Slat Hgt 4.25" <b>WW40T</b> - XICO Integration Clip Turf UNV	<b>P24W</b> - 24" White Cable Kit <b>P24B</b> - 24" Black Cable Kit


OPTIONAL	
EMERGENCY BACKUP	WIRELESS MODULE
<p><b>EMC</b> - Emergency Circuit <b>EMB</b> - Emergency Battery (10W — Remote) <b>X_</b> - Specify Backup</p> <p>Specify requirements at time of order.</p>	<p><b>WCN</b> - Wireless Communication Node (Connected to LED Driver In-Fixture or In-Driver Box) <b>PIR</b> - Wireless Communication Node + PIR Sensor (Standard Lens for Low Bay &lt; 10') <b>MW</b> - Wireless Communication Node + MW Sensor (Standard for Low Bay &lt; 10') <b>X_</b> - Other – Specify Embedded Component or Specific Non-Standard Sensor Detection Range</p>

DIMENSIONS & INSTALLATION

Dimensions

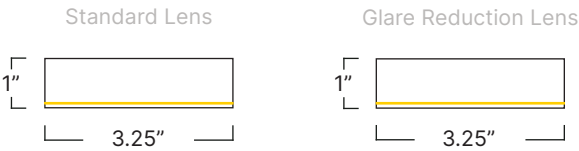

Standard Fixtures

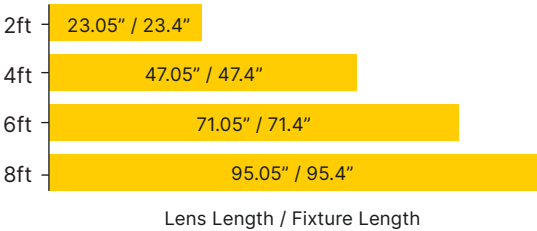


Mounting Type

Woodworks Integration

Installs into a wood slat cavity via an integration clip. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements.

Mounting Options

Mounting Method

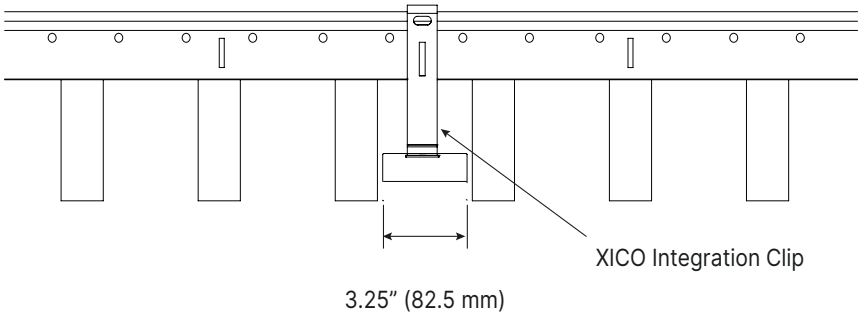

## SMARTBEAM® TECHNOLOGY





### The Ultimate Control of Lighting Distributions

SmartBeam makes it easy to specify the exact light required for any architectural space. Available in every XICO product; it is now possible to create truly tailored and engaging lighting that transform spaces, improves visual comfort, and saves energy.

To learn more about our SmartBeam Technology, please click or scan the QR Code.



### Direct Optics Choices

DIRECT OPTICS	BEAM PATTERN		
	DLAM	DBW65	DA5025
Standard Lens			
Glare Reduction Lens			

### LPW Efficacy Conversion Chart

CODE	CCT SELECTED							
	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
80	–	0.91	0.96	1.00	1.04	1.11	1.11	1.11
90	–	0.91	0.96	1.00	1.04	1.11	1.11	1.11
95	–	0.91	0.96	1.00	1.04	1.11	1.03	1.04
SUN	–	0.90	0.92	1.00	1.01	1.07	1.04	1.05


### LPW Performance

	DIRECT		
	DLAM	DBW65	DA5025
LM/W	110	109	141

DIRECT PHOTOMETRICS

Static White Light

48" Length, 80+/3500K CRI/CCT, 3,000 Lumens

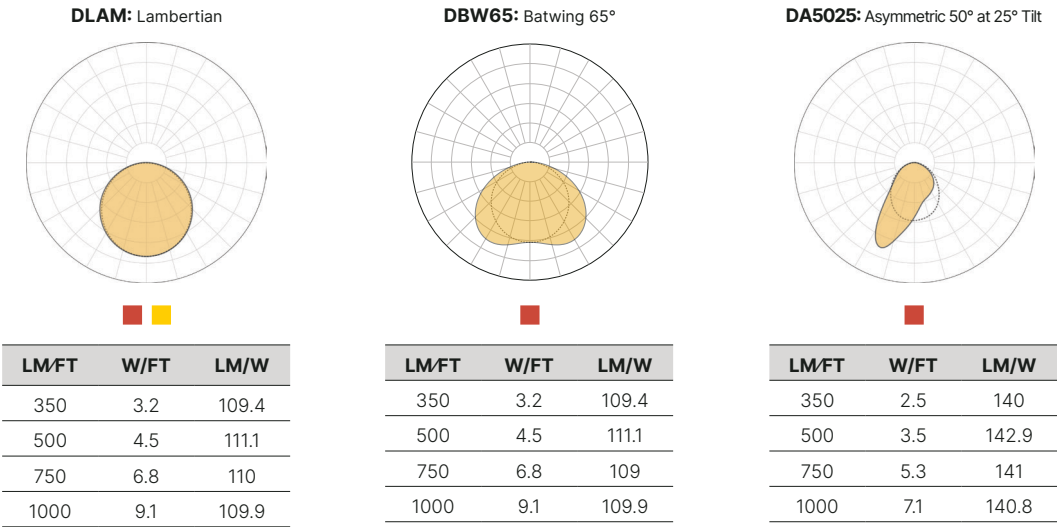

OPTICS CONFIGURATIONS

Standard Lens	Glare Reduction Lens		
White Standard Lens OSL	White Glare Reduction Lens GRL		


COMPATIBLE OPTIC	
FLUSH LENS	GLARE REDUCTION LENS

WELL Building Standard™ and LEED Certification

EDGE Solo products are LEED certified and meet the WELL Building Standard™ for low glare (UGR <19) when specified with a low-glare lens option and configured at or below maximum lumen-per-foot output. Refer to the chart below for qualifying configurations and performance data.

LM/FT	EDGE Solo			
	ESO200	ESO275	ESO325	ESO525
350				
400				
500				
750				

LED OPTIONS

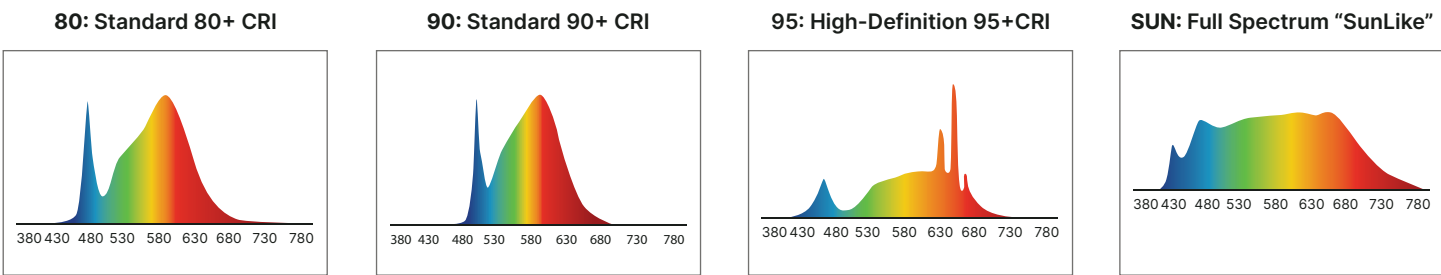

CODE	DESCRIPTION	TYPICAL LED DATA							
		CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	M/P Ratio	LPW
80	Standard 80 CRI	3500K	82.5	7.8	84	96.7	82.5	0.51	190
90	Standard 90 CRI	3500K	91	54.3	89.3	98.9	89.2	0.55	175
95	High Definition 95 CRI	3500K	97.1	95	–	–	–	0.70	163
SUN	Full Spectrum SunLike®	3500K	95	85	–	–	–	–	130

## POWER & CONTROLS

### Voltage

**Fixture Voltage (AC)**

120–277 VAC

347 VAC, 50/60 Hz

**Power Location**

Remote

**LED Driver**

Factory Selected, 36–39V Constant Current

### Drivers

**FDND** - Factory Non-Dimming**FD00** - Factory 0–10V 0.1% Dim**FD01** - Factory 0–10V 1% Dim**FD10** - Factory 0–10V 10% Dim**FDDA** - Factory DALI 0.1% Dim**FDDX** - Factory DMX Dim**FDTR** - Factory TRIAC Dim**LD01** - Lutron Hi-Lume 1% Dim**X\_** - Specify Driver

### Emergency Backup (Optional)

**EMC** - Emergency Circuit**EMB** - Emergency Battery

(10 W — Remote)

**X\_** - Specify Backup**Power**

10 W

**Illumination Time**

90 minutes

### IP Rating

Suitable for Dry and Damp Locations,  
indoor use only**XBox****Remote Driver Boxes  
(Optional)**

To create a clean and organized power solution for multiple fixture installations see our XBox Specification Guide. Reach out to a XICO Sales Representative to discuss your project's needs.

### Compatible Control Options





## TECHNICAL SPECIFICATIONS

### Finishes & Design Options

#### Powder Coated Housing Colors (Matte Finish)

White (RAL9003)  
Black (RAL9005)  
Gray (RAL7001)  
Custom RAL



#### Housing Material

6063-T5 extruded, recycled aluminum

#### Mounting Brackets

Sheet Metal

#### End Cap Material

6063-T5 extruded, recycled aluminum

#### Lens Options and Material

Standard and Glare Reduction lens options with Patented SmartOptics® made from Acrylic (PMMA)

### Standards & Certifications

#### Sustainability

Low carbon, environmentally conscious packaging and shipping methods

#### Compliance

BABAA & TAA compliant in-house manufacturing in Boston, MA with North American supply chain



#### Certifications



#### Declare Listed and Red List Free

Low carbon, environmentally conscious packaging and shipping methods

#### Recyclable

SmartOptics and all powder coated and anodized parts are fully recyclable at end of life

#### Manufacturing

All XICO products and associated optics and LED engines are assembled at our factory in Woburn, MA

#### Quality Assurance

Each product is engineered for reliability and tested for quality assurance

### Declare.

Nano Series  
XICO Lighting

Final Assembly: Woburn, MA, USA  
Life Expectancy (Yr): 10+  
End of Life Options: Recyclable (99%)

**Ingredients:**  
Aluminum; Glass; oxides, chemicals; Polymethyl methacrylate; Phenol; 4,4'-O-methylstyryldiphenyl ether; polymer with 2,2'-(2,2,6,6-tetramethyl-1,3-dioxane) bis(4-(4-phenylbenzoyl)phenyl)bis(2,2,6,6-tetramethyl-1,3-dioxane)carboxylic acid; 1,4-dimethyl ether; polymer with 1,4-dimethyl (2,4-benzenedicarbonyl) and 1,2-ethanediol; Polyethylene Glycol; Polyethylene Terephthalate; Barium sulfate; Magnesium; Silicon; Phosphoric acid; Phosphoric acid; diethyl ester; iron; Siloxane and Siloxane; di-Nickel; Chromium; metallic; Gold; Manganese; Titanium; Zinc; Nickel (metallic)

### Declare Listed

At Xico Lighting, we are committed to transparency and sustainability. That's why all our products are Declare listed, providing clear insights into their environmental footprint and safety. Look for these internationally recognized labels on Xico products, packaging, or at [xicoled.com/declare](http://xicoled.com/declare).




### Red List Free


Xico Lighting is dedicated to creating safe, sustainable solutions. All our products are Red List Free, meeting the highest industry standards for healthy and environmentally responsible materials as defined by the International Living Future Institute (ILFI). Learn more at [xicoled.com/declare](http://xicoled.com/declare).

### Quick Links


#### 5-YR Warranty



#### Business Terms



#### Patents & Trademarks



#### SmartBeam



#### Revit Files

